CAD drawing data catalog is available.

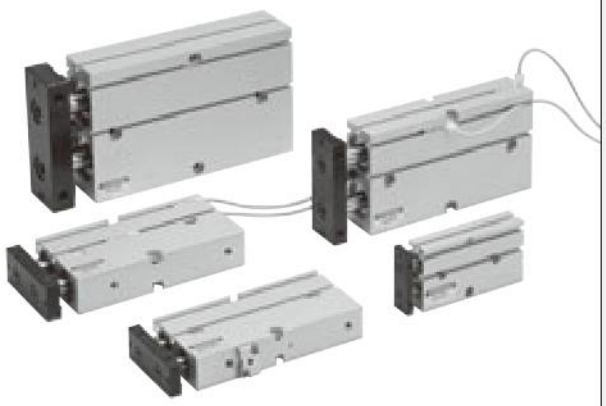

KOGANEI

ACTUATORS GENERAL CATALOG

TWIN ROD CYLINDERS B SERIES

CONTENTS

Features — 755
Cylinder Thrust — 757
Double Acting Type — 759
Double Acting Long Bushing Type — 764
Single Acting Push Type — 769
End Keep Cylinders — 773
Sensor Switches — 777
Handling Instructions and Precautions — 821

⚠ Caution Before use, be sure to read the "Safety Precautions" on p. 57.

KOGANEI

TWIN ROD CYLINDERS

B SERIES

SQUARE

A slender, square form offering direct mounting, a compact design that eliminates the need for guides, and a sensor switch magnet as standard!

FLAT

This horizontal lead wire type compact sensor switch does not protrude from the body, promoting further space-saving of the mechanical device. In addition, 5 mounting locations on 3 different surfaces facilitate detection of various applications.



POWERFUL

Excellent non-rotating accuracy, while a double piston structure doubles the cylinder's thrust.
In addition, the Twin Rod cylinder B series helps save space and man-hours, plus it lowers costs.

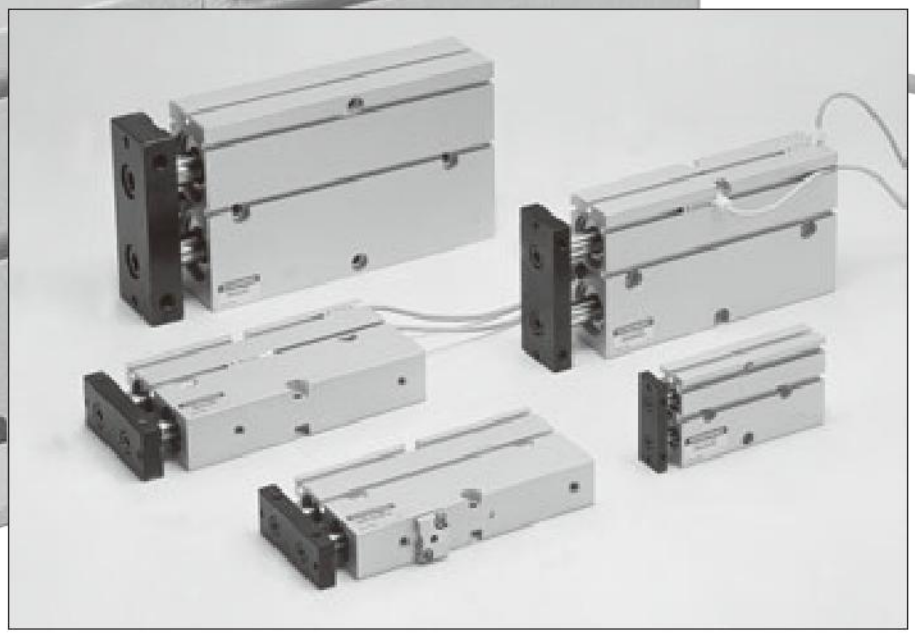

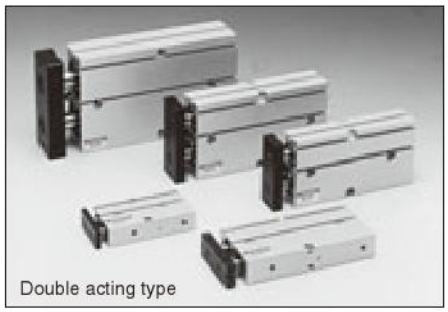
Double acting type

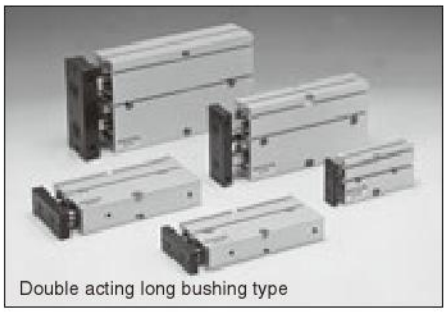
Double acting long bushing type

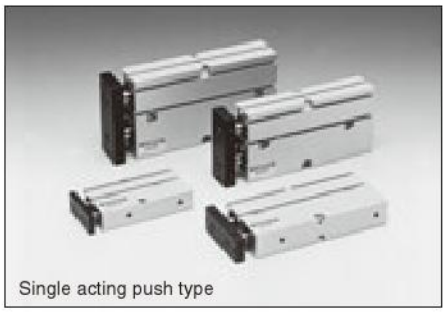
Single acting push type

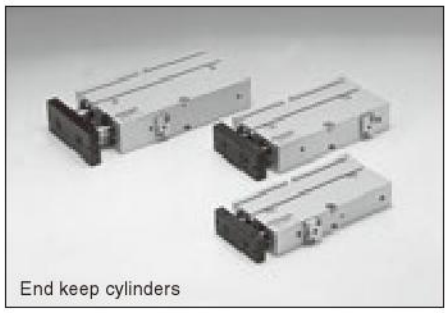
End keep cylinders

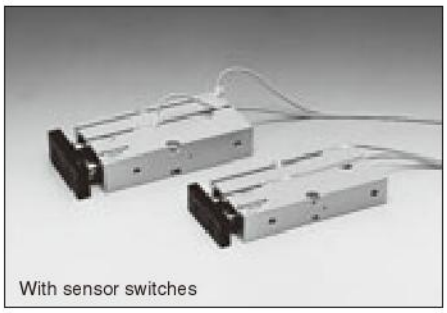
With sensor switches

Selection chart

	Cylinder bore size mm	Strokes mm	Sensor switch: Solid state type	Sensor switch: Reed switch type	Non-ion Specification
Double acting type	10 16 20 25 32	ϕ10 — ϕ16, ϕ20, ϕ25, ϕ32: 10 20 30 40 50 60 70 80 90 100	ZE135 ZE235 ZE155 ZE255	ZE101 ZE102 ZE201 ZE202	Available
Doble acting long bushing type	10 16 20 25 32	ϕ10 — ϕ16, ϕ20, ϕ25, ϕ32: 10 20 30 40 50 60 70 80 90 100	ZE135 ZE235 ZE155 ZE255	ZE101 ZE102 ZE201 ZE202	None
Single acting push type	10 16 20 25	ϕ10, ϕ16, ϕ20, ϕ25: 10 20 30 40 50 60	ZE135 ZE235 ZE155 ZE255	ZE101 ZE102 ZE201 ZE202	None
End keep cylinders	16 20 25	ϕ16, ϕ20, ϕ25: 10 20 30 40 50 60 70 80	ZE135 ZE235 ZE155 ZE255	ZE101 ZE102 ZE201 ZE202	None

Cylinder Thrust

Select a suitable cylinder bore size considering the load and air pressure to obtain the required thrust.
Since the figures in the table are calculated values, select a bore size that results in a load ratio (load ratio = $\frac{\text{Load}}{\text{Calculated value}}$) of 70% or less (50% or less for high speed application).

N [lbf.]

Bore size mm [in.]	Rod dia. mm [in.]	Operation		Pressure area mm^2 [$in.^2$]	Air pressure MPa [psi.]						
					0.1 [15]	0.2 [29]	0.3 [44]	0.4 [58]	0.5 [73]	0.6 [87]	0.7 [102]
10 [0.394]	**6 [0.236]**	Double acting type	Push side	157 [0.243]	——	31.4 [7.06]	47.1 [10.59]	62.8 [14.12]	78.5 [17.65]	94.2 [21.18]	109.9 [24.71]
			Pull side	100 [0.155]	——	20 [4.5]	30 [6.7]	40 [9.0]	50 [11.2]	60 [13.5]	70 [15.7]
		Single Acting Push Type		157 [0.243]	——	——	5.5 [1.24]	21.2 [4.77]	36.9 [8.30]	52.6 [11.82]	68.3 [15.35]
16 [0.630]	**8 [0.315]**	Double acting type	Push side	402 [0.623]	40.2 [9.04]	80.4 [18.07]	120.6 [27.11]	160.8 [36.15]	201 [45.18]	241.2 [54.22]	281.4 [63.26]
			Pull side	301 [0.467]	30.1 [6.77]	60.2 [13.53]	90.3 [20.30]	120.4 [27.07]	150.5 [33.83]	180.6 [40.60]	210.7 [47.37]
		Single Acting Push Type		402 [0.623]	——	39.3 [8.83]	79.5 [17.87]	119.7 [26.91]	159.9 [35.95]	200.1 [44.98]	240.3 [54.02]
20 [0.787]	**10 [0.394]**	Double acting type	Push side	628 [0.973]	62.8 [14.12]	125.6 [28.23]	188.4 [42.35]	251.2 [56.47]	314 [70.59]	376.8 [84.70]	439.6 [98.82]
			Pull side	471 [0.730]	47.1 [10.59]	94.2 [21.18]	141.3 [31.76]	188.4 [42.35]	235.5 [52.94]	282.6 [63.53]	329.7 [74.12]
		Single Acting Push Type		628 [0.973]	——	78.2 [17.58]	141 [31.70]	203.8 [45.81]	266.6 [59.93]	329.4 [74.05]	392.2 [88.17]
25 [0.984]	**12 [0.472]**	Double acting type	Push side	981 [1.521]	98.1 [22.05]	196.2 [44.11]	294.3 [66.16]	392.4 [88.21]	490.5 [110.26]	588.6 [132.32]	686.7 [154.37]
			Pull side	755 [1.170]	75.5 [16.97]	151 [33.94]	226.5 [50.92]	302 [67.89]	377.5 [84.86]	453 [101.83]	528.5 [118.81]
		Single Acting Push Type		981 [1.521]	——	115.8 [26.03]	213.9 [48.08]	312 [70.14]	410.1 [92.19]	508.2 [114.24]	606.3 [136.30]
32 [1.260]	**16 [0.630]**	Double acting type	Push side	1607 [2.491]	160.7 [36.13]	321.4 [72.25]	482.1 [108.38]	642.8 [144.50]	803.5 [180.63]	964.2 [216.75]	1124.9 [252.88]
			Pull side	1205 [1.868]	120.5 [27.09]	241 [54.18]	361.5 [81.27]	482 [108.35]	602.5 [135.44]	723 [162.53]	843.5 [189.62]

Note: The values of the single acting push type show the thrust at the end of the 60mm stroke.

The Spring Return Force (Only for the Single Acting Type)

N [lbf.]

Bore size mm [in.]	Stroke mm	At zero stroke	At the end of stroke
10 [0.394]	10	16.5 [3.71]	20.6 [4.63]
	20	12.4 [2.79]	
	30	8.2 [1.84]	
	40	25.1 [5.64]	41.6 [9.35]
	50	21.0 [4.72]	
	60	16.9 [3.80]	
16 [0.630]	10	15.9 [3.57]	20.4 [4.59]
	20	11.1 [2.50]	
	30	6.3 [1.42]	
	40	22.3 [5.01]	41.1 [9.24]
	50	17.6 [3.96]	
	60	12.8 [2.88]	
20 [0.787]	10	19.6 [4.41]	23.5 [5.28]
	20	15.7 [3.53]	
	30	11.8 [2.65]	
	40	31.7 [7.13]	47.4 [10.66]
	50	27.8 [6.25]	
	60	23.8 [5.35]	
25 [0.984]	10	32.9 [7.40]	39.5 [8.88]
	20	26.2 [5.89]	
	30	19.5 [4.38]	
	40	53.7 [12.07]	80.4 [18.07]
	50	47.1 [10.59]	
	60	40.4 [9.08]	

Notes: 1. The values are for 2 springs.
2. Avoid application that applies a load on the spring return side.

Air Flow Rate and Air Consumption

While the Twin Rod cylinder's air flow rate and air consumption can be found through the following calculations, the quick reference chart to the right provides the answers more conveniently.

Air flow rate $Q_1 = \frac{\pi D^2}{4} \times L \times \frac{60}{t} \times \frac{P + 0.101}{0.101} \times 10^{-6} \times 2$

Air consumption $Q_2 = \frac{\pi D^2}{4} \times L \times 2 \times n \times \frac{P + 0.101}{0.101} \times 10^{-6} \times 2$

Q_1: Required air flow rate for cylinder	ℓ /min (ANR)
Q_2: Air consumption of cylinder	ℓ /min (ANR)
D: Cylinder bore diameter	mm
L: Cylinder stroke	mm
t: Time required for cylinder to travel 1 stroke	s
n: Number of cylinder reciprocations per minute	times/min
P: Air pressure	MPa

Air flow rate $Q_1' = \frac{\pi D'^2}{4} \times L' \times \frac{60}{t} \times \frac{P' + 14.7}{14.7} \times \frac{1}{1728} \times 2$

Air consumption $Q_2' = \frac{\pi D'^2}{4} \times L' \times 2 \times n \times \frac{P' + 14.7}{14.7} \times \frac{1}{1728} \times 2$

Q_1': Required air flow rate for cylinder	ft³/min. (ANR)※
Q_2': Air consumption of cylinder	ft³/min. (ANR)※
D′: Cylinder bore diameter	in.
L′: Cylinder stroke	in.
t: Time required for cylinder to travel 1 stroke	sec.
n: Number of cylinder reciprocations per minute	times/min.
P′: Air pressure	psi.

※Refer to p.54 for an explanation of ANR.

Air consumption for each 1mm [0.0394in.] stroke

cm³ [in.³]/Reciprocation (ANR)

Bore size mm	Air pressure MPa [psi.]						
	0.1 [15]	0.2 [29]	0.3 [44]	0.4 [58]	0.5 [73]	0.6 [87]	0.7 [102]
10	(0.620 [0.03783])	0.924 [0.05639]	1.228 [0.07494]	1.534 [0.09361]	1.838 [0.11216]	2.146 [0.13096]	2.450 [0.14951]
16	1.584 [0.09666]	2.364 [0.14426]	3.146 [0.19198]	3.926 [0.23958]	4.704 [0.28706]	5.486 [0.33478]	6.266 [0.38238]
20	2.48 [0.1513]	3.72 [0.2270]	4.90 [0.2990]	6.14 [0.3747]	7.36 [0.4491]	8.58 [0.5236]	9.80 [0.5980]
25	3.88 [0.2368]	5.78 [0.3527]	7.66 [0.4674]	9.58 [0.5846]	11.50 [0.7018]	13.42 [0.8189]	15.34 [0.9361]
32	6.36 [0.3881]	9.46 [0.5773]	12.56 [0.7665]	15.70 [0.9581]	18.82 [1.1485]	21.96 [1.3401]	25.10 [1.5317]

The figures in the table show the air flow rate and air consumption when an air cylinder makes 1 reciprocation with stroke of 1mm [0.0394in.].
The air flow rate and air consumption actually required is found by the following calculations.

● Finding the air flow rate (for selecting F.R.L., valves, etc.)

Example 1. When operating a Twin Rod cylinder with bore size of 20mm [0.787in.] at speed of 300mm/s [11.8in./sec.] and under air pressure of 0.5MPa [73psi.]

$7.36 \times \frac{1}{2} \times 300 \times 10^{-3} \fallingdotseq 1.10$ ℓ /s [0.0388ft.³/sec.] (ANR)

(At this time, the flow rate per minute is $7.36 \times \frac{1}{2} \times 300 \times 60 \times 10^{-3} = 66.24$ ℓ /min [2.338ft.³/min.] (ANR))

● Finding the air consumption

Example 1. When operating a Twin Rod cylinder with bore size of 20mm [0.787in.], stroke of 50mm [1.97in.], and under air pressure of 0.5Mpa [73psi.], for 1 reciprocation.

$7.36 \times 50 \times 10^{-3} = 0.368$ ℓ /Reciprocation [0.0130ft.³/Reciprocation] (ANR)

Example 2. When operating a Twin Rod cylinder with a bore size of 20mm [0.787in.], a stroke of 50mm [1.97in.], and under air pressure of 0.5MPa [73psi], for 10 reciprocations per minute.

$7.36 \times 50 \times 10 \times 10^{-3} = 3.68$ ℓ /min [0.130ft.³/min.] (ANR)

TWIN ROD CYLINDERS
B SERIES

Double Acting Type

Symbol



Specifications

Item \ Bore size mm [in.]	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
Operation type	Double acting type				
Media	Air				
Mounting type	Side mount				
Operating pressure range MPa [psi.]	0.15～0.7 [22～102]	0.1～0.7 [15～102]			
Proof pressure MPa [psi.]	1.05 [152]				
Operating temperature range °C [°F]	0～60 [32～140]				
Operating speed range mm/s [in./sec.]	100～500 [3.9～19.7]				
Cushion	Rubber bumper				
Lubrication	Not required (If lubrication is required, use Turbine Oil Class 1 [ISO VG32] or equivalent.)				
Non-rotating accuracy	±0.4°	±0.3°			
Stroke adjusting range mm [in.]	−5～0 [−0.197～0] (To the specification stroke)				
Port size	M5×0.8				Rc1/8

Bore Size and Stroke

mm

Bore size	Standard strokes	Maximum available stroke	Pull side stroke adjusting range
10	10, 20, 30, 40, 50, 60, 70	140	−5～0
16	10, 20, 30, 40, 50, 60, 70 80, 90, 100	200	
20	10, 20, 30, 40, 50, 60, 70 80, 90, 100	200	
25	10, 20, 30, 40, 50, 60, 70 80, 90, 100	200	
32	10, 20, 30, 40, 50, 60, 70 80, 90, 100	200	

Note: Consult us for delivery of strokes that exceed the standard strokes.
Remark: Use the above table for non-ion specification, as well.

Order Codes

TBDA **16×30** – [ ] – [ ] [ ] [ ]

Twin rod cylinder
B series
double acting type[Note1]

Bore size
×
Stroke

Non-ion specification[Note2]
Blank — Standard specification
The standard specification of ϕ10, ϕ16, and ϕ20 can also be used as non-ion specification.
NCU — Non-ion specification for ϕ25, ϕ32 (Made to order)

Sensor switch
Blank — No sensor switch

ZE135	2-lead wire, Solid state type	with indicator lamp	DC10～28V	Horizontal lead wire
ZE235	2-lead wire, Solid state type	with indicator lamp	DC10～28V	Vertical lead wire
ZE155	3-lead wire, Solid state type	with indicator lamp	DC4.5～28V	Horizontal lead wire
ZE255	3-lead wire, Solid state type	with indicator lamp	DC4.5～28V	Vertical lead wire
ZE101	2-lead wire, Reed switch type	without indicator lamp	DC5～28V AC85～115V	Horizontal lead wire
ZE201	2-lead wire, Reed switch type	without indicator lamp	DC5～28V AC85～115V	Vertical lead wire
ZE102	2-lead wire, Reed switch type	with indicator lamp	DC10～28V AC85～115V	Horizontal lead wire
ZE202	2-lead wire, Reed switch type	with indicator lamp	DC10～28V AC85～115V	Vertical lead wire

Lead wire length
A：1000mm [39in.]
B：3000mm [118in.]

Number of sensor switches
1 — With 1 sensor switch
2 — With 2 sensor switches

Notes: 1. In the standard cylinder, the magnet for sensor switch is built-in.
2. Non-ion specifications of ϕ25, ϕ32 are made to order. The standard specification of ϕ10, ϕ16, and ϕ20 can also be used as non-ion specification. Consult us for specifications and delivery.

●For details of sensor switches, see p.1544.

Inner Construction and Major Parts

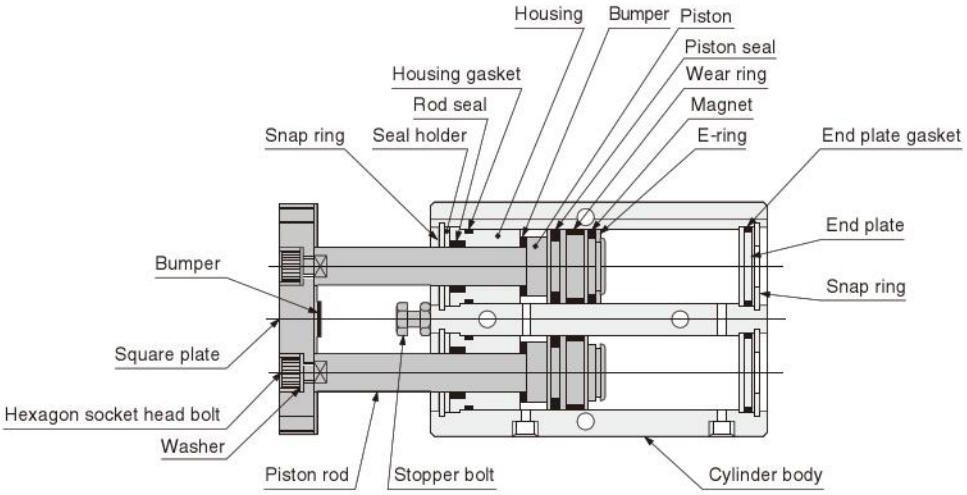

Major Parts and Materials

Parts	Materials
	For standard specification
Cylinder body	Aluminum alloy (anodized)
Piston	Aluminum alloy (chromic acid anodic oxide coating)
Wear ring	Plastic (non-teflon type Note)
Piston rod	Steel (chrome plated)
Gasket	Synthetic rubber (NBR)
Seal holder	Mild steel (nickel plated)
Housing	Aluminum alloy (special wear-resistant treatment)
End plate	Plastic (aluminum (anodized) for only ϕ32 [1.260in.])
Seal	Synthetic rubber (NBR)
Snap ring	Steel (nickel plated)
Magnet	Plastic magnet
E-ring	Stainless steel
Washer	Steel (nickel plated)
Square plate	Mild steel (nickel plated)
Bumper	Synthetic rubber (NBR)
Stopper bolt	Mild steel (zinc plated)

Note: For ϕ25 [0.984in.] and ϕ32 [1.260in.] non-ion specification.
Remark: The standard specification for ϕ10 [0.394in.], ϕ16 [0.630in.], and ϕ20 [0.787in.] can also be used as non-ion specification.
Non-ion specification of ϕ25 [0.984in.] and ϕ32 [1.260in.] are made to order.

Seals

Item	Rod seal	Piston seal	End plate gasket	Housing gasket
Quantity / Bore mm	2	2	2	2
10	PIU-6	COP-10L	1.5×9	1.5×9
16	PIU-8	COP-16L	1.5×14.5	1.5×13
20	PIU-10	COP-20	1.5×18	1.5×17
25	PIU-12	COP-25	1.5×23	1.5×22
32	PIU-16	COP-32	2×31.5	2×28.5

Mass

g [oz.]

Bore size mm [in.]		Zero stroke mass Note1	Additional mass		
			Additional mass for each 10mm [0.394in.] stroke	Mass of 1 sensor switch Note2	
				ZE□□□A	ZE□□□B
10 [0.394]	Standard specification	100 [3.53]	18 [0.63]	15 [0.53]	35 [1.23]
16 [0.630]	Standard specification	204 [7.20]	27 [0.95]		
20 [0.787]	Standard specification	335 [11.82]	36 [1.27]		
25 [0.984]	Standard specification	495 [17.46]	51 [1.80]		
32 [1.260]	Standard specification	1230 [43.39]	93 [3.28]		

Notes: 1. The above table is for the standard strokes.
2. There are 2 types of sensor switch lead wire lengths.
A : 1000mm [39in.], B : 3000mm [118in.]

Calculation example: The mass for standard cylinder, bore size of 20mm, and stroke of 60mm, with 2 sensor switches (ZE135A),
335+(36×6)+(15×2)=581g [20.49oz.]

$$\text{Stroke} \rightarrow \frac{\text{Stroke}}{10}$$

Dimensions of Double Acting Type (mm)

● ϕ 10

TBDA10

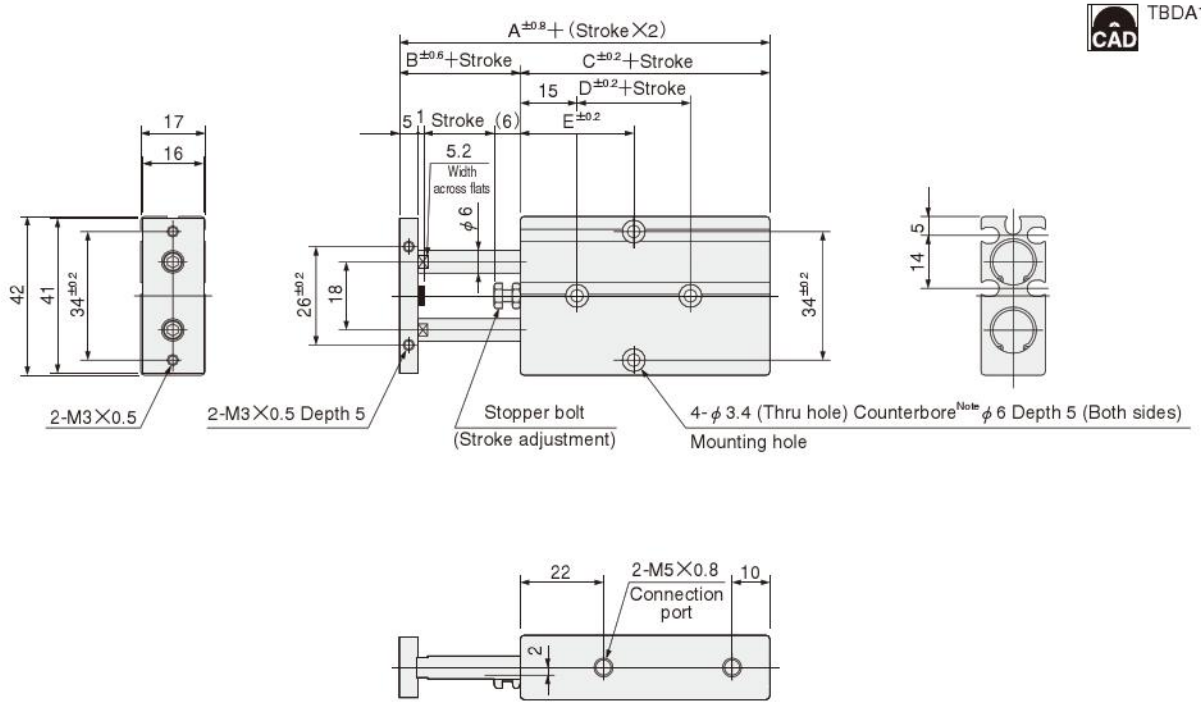

Code / Stroke / Bore mm [in.]	A	B	C	D	E						
					10	20	30	40	50	60	70
10 [0.394]	58	12	46	10	30	30	35	40	45	50	55

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

Dimensions of Double Acting Type (mm)

● ϕ 16～ ϕ 25

TBDA Bore size

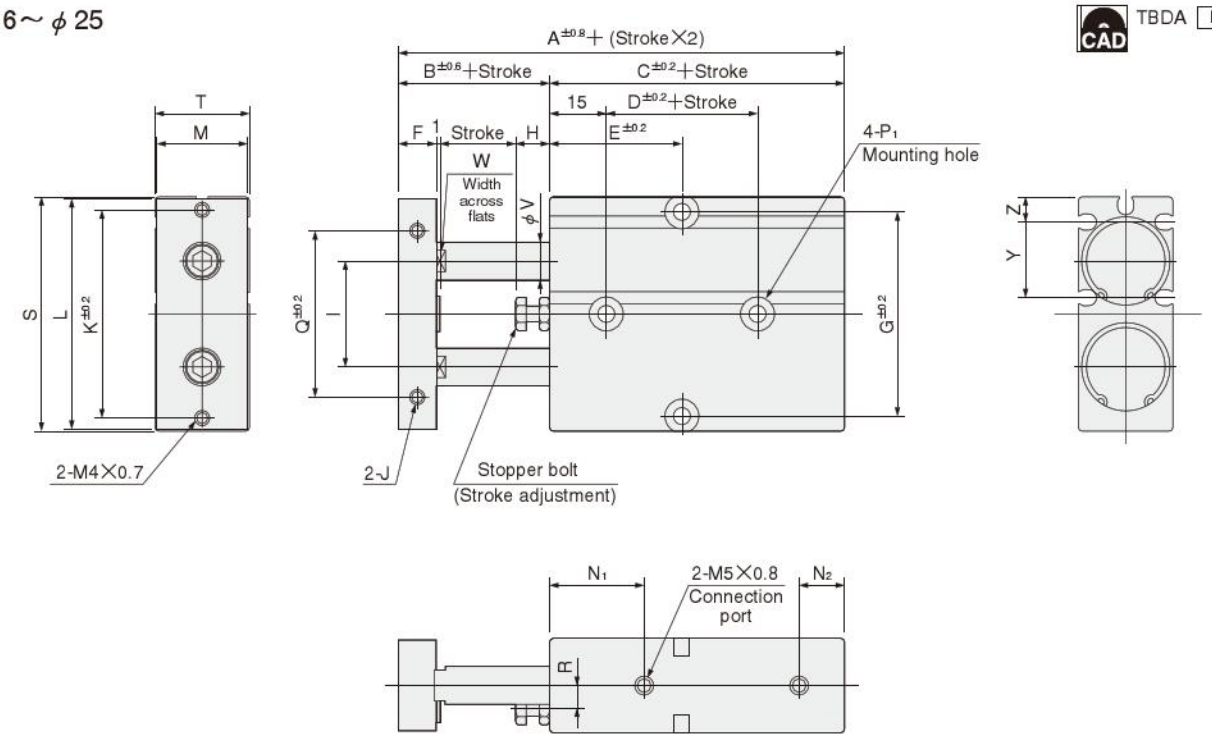

Code / Stroke / Bore mm [in.]	A	B	C	D	E										F	G	H	I	J	K	L	M
					10	20	30	40	50	60	70	80	90	100								
16 [0.630]	68	15	53	20	30	35	40	45	50	55	60	65	70	75	8	47	6	24	M4×0.7 Depth 5	47	53	20
20 [0.787]	78	20	58	20	35	35	40	45	50	55	60	65	70	75	10	55	9	28	M4×0.7 Depth 5	55	61	24
25 [0.984]	81	19	62	30	40	40	45	50	55	60	65	70	75	80	10	66	8	34	M5×0.8 Depth 6	66	72	29

Bore mm [in.] / Code	N_1	N_2	P_1 Note	Q	R	S	T	V	W	Y	Z
16 [0.630]	22	10	ϕ 4.5 (Thru hole) Counterbore ϕ 8 Depth 5.5 (Both sides)	34	4	54	21	8	6.2	18.5	5.7
20 [0.787]	25	12	ϕ 4.5 (Thru hole) Counterbore ϕ 8 Depth 5.5 (Both sides)	44	6	62	25	10	8.2	20	6.8
25 [0.984]	30	12	ϕ 4.5 (Thru hole) Counterbore ϕ 9 Depth 6 (Both sides)	56	7	73	30	12	10.2	22.5	8.3

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

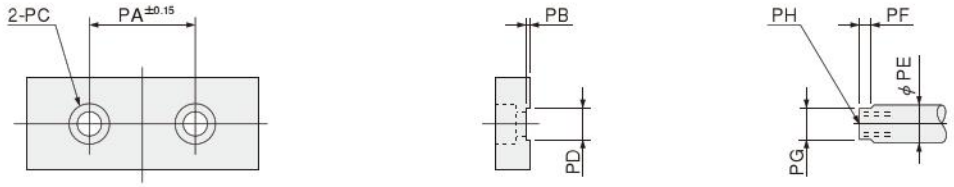

Bore mm [in.] / Code	PA	PB	PC	PD	PE	PF	PG	PH
16 [0.630]	24	1	ϕ 4.3 Counterbore ϕ 7.8 Depth 4.6	6.2 $^{+0.1}_{0}$	8	3	6.2 $^{-0.05}_{-0.15}$	M4 ×0.7 Depth 6
20 [0.787]	28	1	ϕ 6.5 Counterbore ϕ 11 Depth 6.8	8.2 $^{+0.1}_{0}$	10	3	8.2 $^{-0.05}_{-0.15}$	M6 ×1 Depth 8
25 [0.984]	34	1	ϕ 6.5 Counterbore ϕ 11 Depth 6.8	10.2 $^{+0.1}_{0}$	12	3	10.2 $^{-0.05}_{-0.15}$	M6 ×1 Depth 8

Dimensions of Double Acting Type (mm)

● ϕ 32

TBDA32

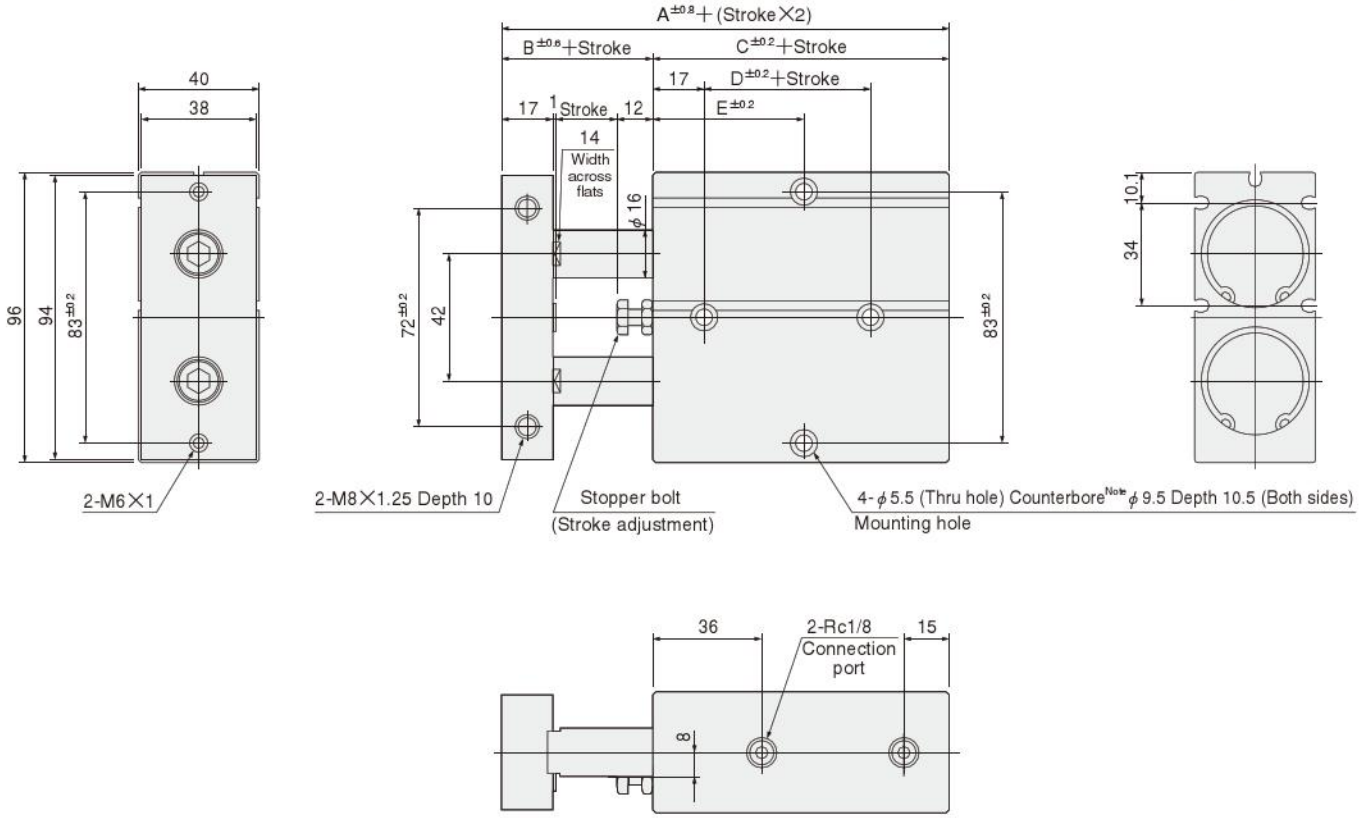

Code / Stroke / Bore mm [in.]	A	B	C	D	E									
					10	20	30	40	50	60	70	80	90	100
32 [1.260]	108	30	78	35	45	50	55	60	65	70	75	80	85	90

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

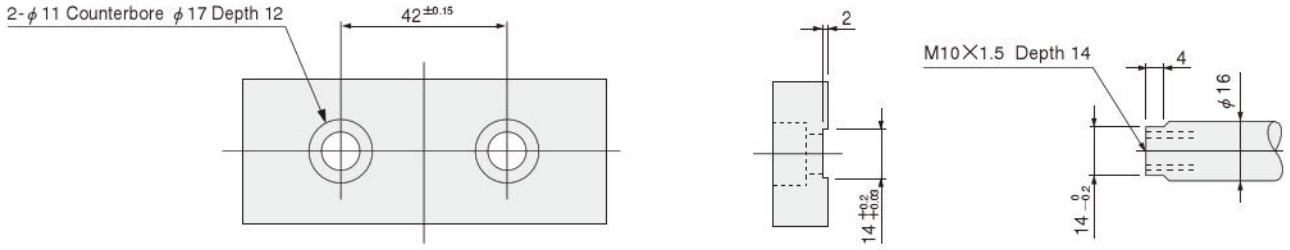

TWIN ROD CYLINDERS B SERIES

Double Acting Long Bushing Type

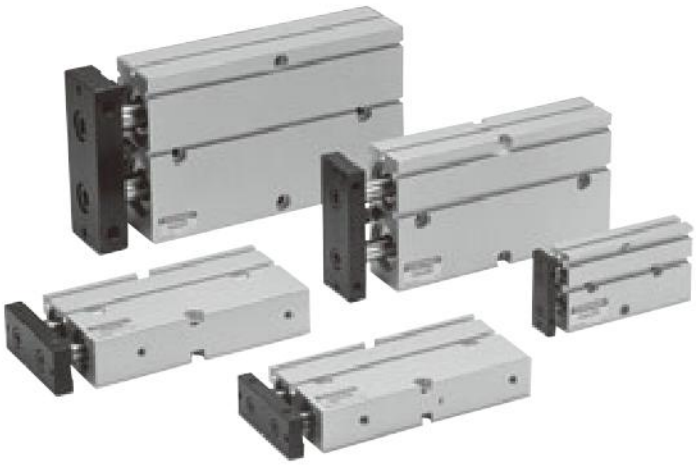

Symbol



Specifications

Item \ Bore size mm [in.]	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
Operation type	Double acting type				
Media	Air				
Mounting type	Side mount				
Operating pressure range MPa [psi.]	0.2～0.7 [29～102]	0.15～0.7 [22～102]			
Proof pressure MPa [psi.]	1.05 [152]				
Operating temperature range °C [°F]	0～60 [32～140]				
Operating speed range mm/s [in./sec.]	100～500 [3.9～19.7]				
Cushion	Rubber bumper				
Lubrication	Not required (If lubrication is required, use Turbine Oil Class 1 [ISO VG32] or equivalent.)				
Non-rotating accuracy	±0.4°	±0.3°			
Stroke adjusting range mm [in.]	−5～0 [−0.197～0] (To the specification stroke)				
Port size	M5×0.8				Rc1/8

Bore Size and Stroke

mm

Bore size	Standard strokes	Maximum available stroke	Pull side stroke adjusting range
10	10, 20, 30, 40, 50, 60, 70	130	−5～0
16	10, 20, 30, 40, 50, 60, 70 80, 90, 100	200	
20	10, 20, 30, 40, 50, 60, 70 80, 90, 100	200	
25	10, 20, 30, 40, 50, 60, 70 80, 90, 100	200	
32	10, 20, 30, 40, 50, 60, 70 80, 90, 100	200	

Note: Consult us for delivery of strokes that exceed the standard strokes.

Order Codes

TBDAM | **16×30** | **–** | | | |

Twin rod cylinder B series double acting long bushing type Note

Bore size × **Stroke**

Sensor switch

Lead wire length
A：1000mm [39in.]
B：3000mm [118in.]

Number of sensor switches
1 — With 1 sensor switch
2 — With 2 sensor switches

Blank — No sensor switch

ZE135	2-lead wire, Solid state type	with indicator lamp	DC10～28V	Horizontal lead wire	● For details of sensor switches, see p.1544.
ZE235	2-lead wire, Solid state type	with indicator lamp	DC10～28V	Vertical lead wire	
ZE155	3-lead wire, Solid state type	with indicator lamp	DC4.5～28V	Horizontal lead wire	
ZE255	3-lead wire, Solid state type	with indicator lamp	DC4.5～28V	Vertical lead wire	
ZE101	2-lead wire, Reed switch type	without indicator lamp	DC5～28V AC85～115V	Horizontal lead wire	
ZE201	2-lead wire, Reed switch type	without indicator lamp	DC5～28V AC85～115V	Vertical lead wire	
ZE102	2-lead wire, Reed switch type	with indicator lamp	DC10～28V AC85～115V	Horizontal lead wire	
ZE202	2-lead wire, Reed switch type	with indicator lamp	DC10～28V AC85～115V	Vertical lead wire	

Note: In the double acting long bushing type, the magnet for sensor switch is built-in.

Inner Construction and Major Parts

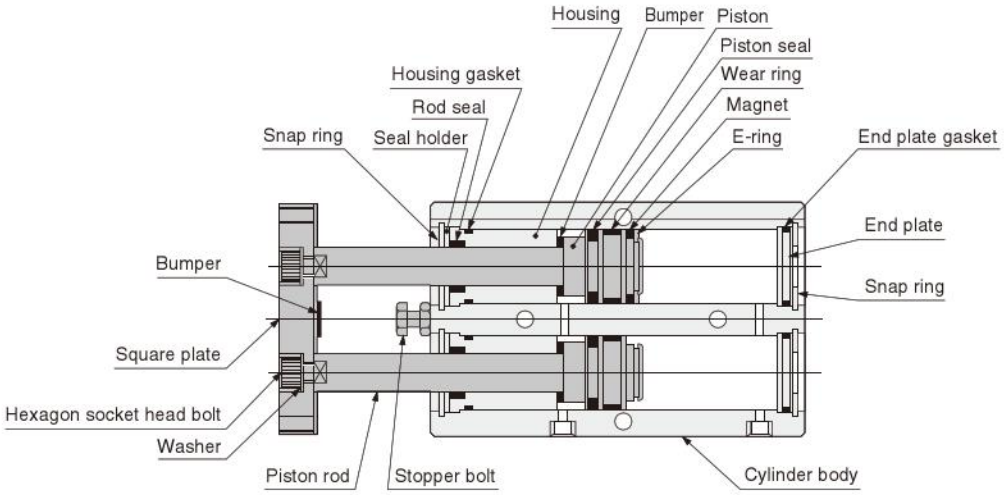

Major Parts and Materials

Parts	Materials
	For standard specification
Cylinder body	Aluminum alloy (anodized)
Piston	Aluminum alloy (chromic acid anodic oxide coating)
Wear ring	Plastic
Piston rod	Steel (chrome plated)
Gasket	Synthetic rubber (NBR)
Seal holder	Mild steel (nickel plated)
Housing	Aluminum alloy (chromic acid anodic oxide coating)
End plate	Plastic (alumlnum alloy (anodized) for only ϕ32 [1.260in.])
Seal	Synthetic rubber (NBR)
Snap ring	Steel (nickel plated)
Magnet	Plastic magnet
E-ring	Stainless steel
Washer	Steel (nickel plated)
Square plate	Mild steel (nickel plated)
Bumper Note	Synthetic rubber (NBR)
Stopper bolt	Mild steel (zinc plated)

Note: Not available in a bore size of 10mm [0.394in.].

Seals

Item / Quantity / Bore mm	Rod seal	Piston seal	End plate gasket	Housing gasket
	2	2	2	2
10	PIU-6	COP-10L	1.5×9	1.5×9
16	PIU-8	PWP-16	1.5×14.5	1.5×13
20	PIU-10	PWP-20	1.5×18	1.5×17
25	PIU-12	PWP-25	1.5×23	1.5×22
32	PIU-16	PWP-32	2×31.5	2×28.5

Mass

g [oz.]

Bore size mm [in.]	Zero stroke mass Note 1	Additional mass		
		Additional mass for each 10mm [0.394in.] stroke	Mass of 1 sensor switch Note2	
			ZE□□□A	**ZE□□□B**
10 [0.394]	119 [4.20]	18 [0.63]	15 [0.53]	35 [1.23]
16 [0.630]	244 [8.61]	27 [0.95]		
20 [0.787]	388 [13.69]	36 [1.27]		
25 [0.984]	568 [20.04]	51 [1.80]		
32 [1.260]	1354 [47.76]	93 [3.28]		

Notes: 1. The above table is for the standard strokes.
2. There are 2 types of sensor switch lead wire lengths.
A : 1000mm [39in.], B : 3000mm [118in.]

Calculation example: The mass of bore size of 20mm, and stroke of 60mm, with 2 sensor switches (ZE135A),
388+(36×6)+(15×2)=634g [22.36oz.]

$\frac{\text{Stroke}}{10}$

Dimensions of Double Acting Long Bushing Type (mm)

● ϕ 10

TBDAM10

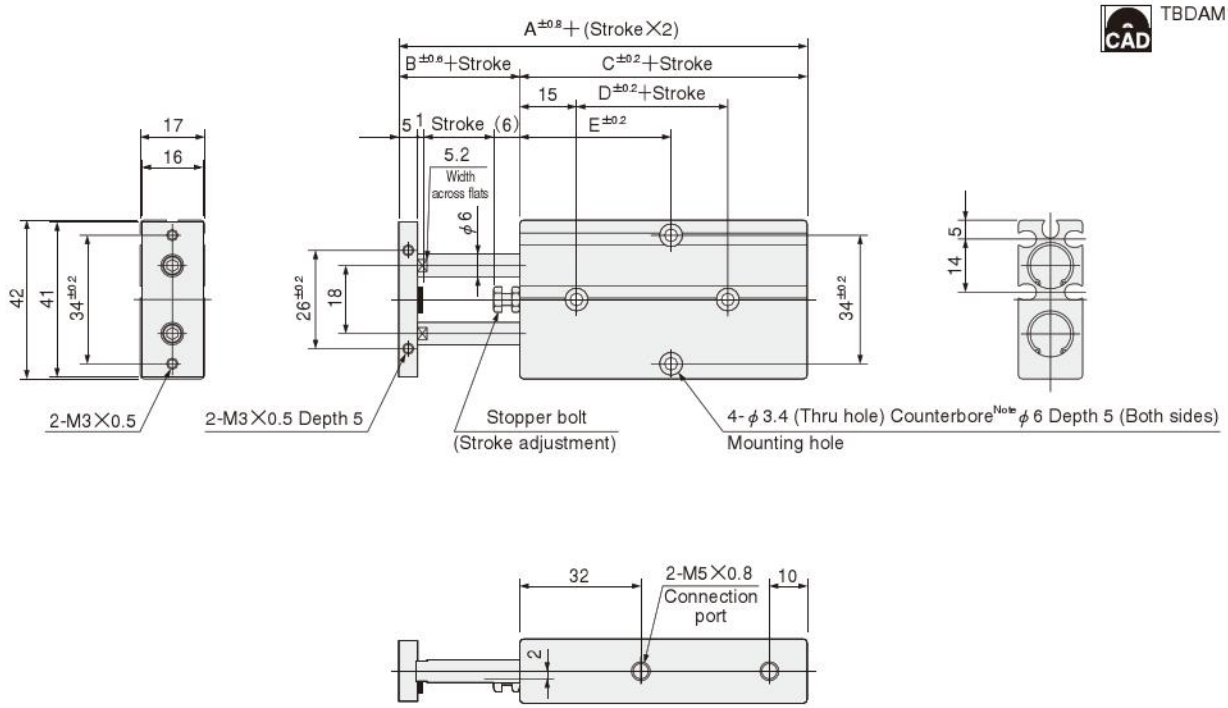

Code / Stroke / Bore mm [in.]	A	B	C	D	E						
					10	20	30	40	50	60	70
10 [0.394]	68	12	56	25	25	40	45	50	55	60	65

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

Dimensions of Double Acting Long Bushing Type (mm)

● ϕ 16～ ϕ 25

CAD TBDAM Bore size

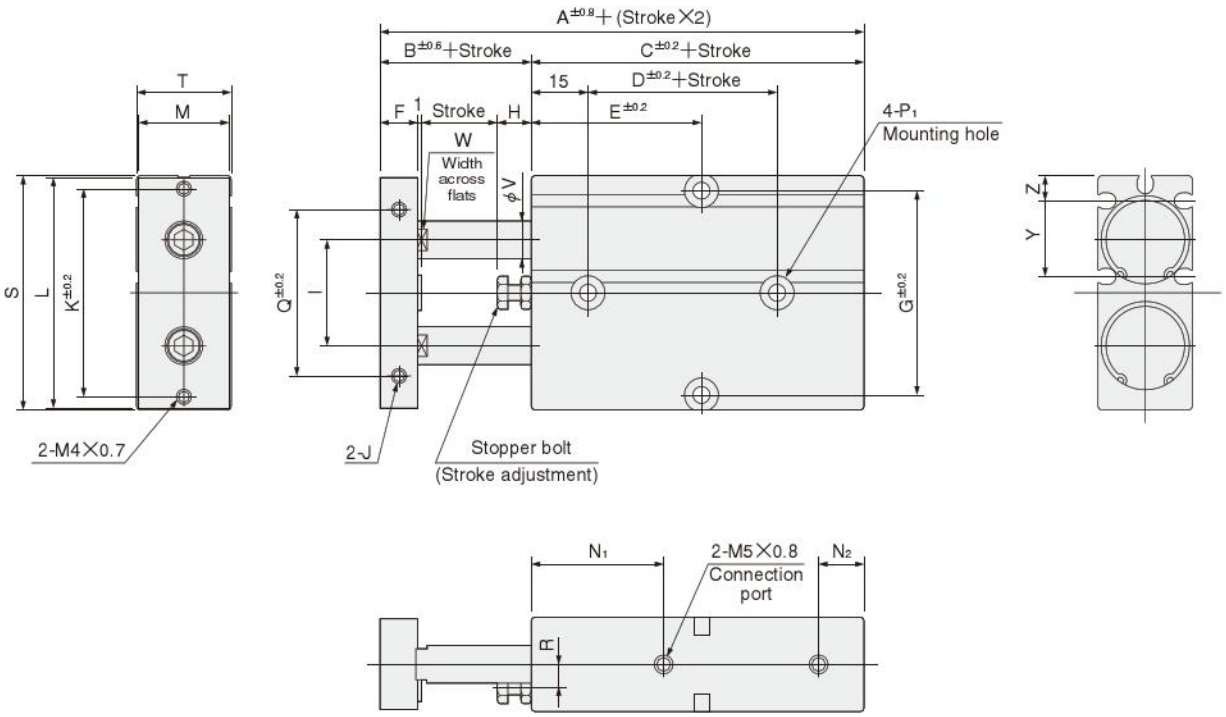

Code / Stroke / Bore mm [in.]	A	B	C	D	E										F	G	H	I	J	K	L	M
					10	20	30	40	50	60	70	80	90	100								
16 [0.630]	78	15	63	30	40	45	50	55	60	65	70	75	80	85	8	47	6	24	M4×0.7 Depth 5	47	53	20
20 [0.787]	88	20	68	30	45	45	45	50	55	60	65	70	75	80	10	55	9	28	M4×0.7 Depth 5	55	61	24
25 [0.984]	91	19	72	40	50	50	50	55	60	65	70	75	80	85	10	66	8	34	M5×0.8 Depth 6	66	72	29

Bore mm [in.] / Code	N_1	N_2	P_1 Note	Q	R	S	T	V	W	Y	Z
16 [0.630]	32	10	ϕ4.5 (Thru hole) Counterbore ϕ8 Depth 5.5 (Both sides)	34	4	54	21	8	6.2	18.5	5.7
20 [0.787]	35	12	ϕ4.5 (Thru hole) Counterbore ϕ8 Depth 5.5 (Both sides)	44	6	62	25	10	8.2	20	6.8
25 [0.984]	40	12	ϕ4.5 (Thru hole) Counterbore ϕ9 Depth 6 (Both sides)	56	7	73	30	12	10.2	22.5	8.3

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

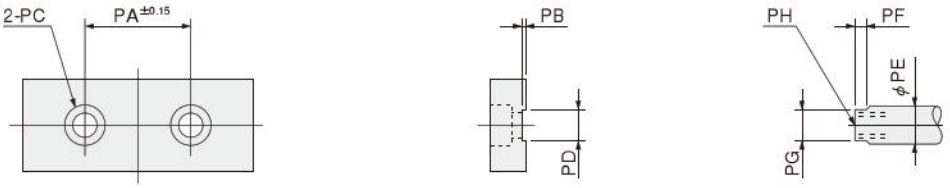

Bore mm [in.] / Code	PA	PB	PC	PD	PE	PF	PG	PH
16 [0.630]	24	1	ϕ4.3 Counterbore ϕ7.8 Depth 4.6	$6.2^{+0.1}_{0}$	8	3	$6.2^{-0.05}_{-0.15}$	M4 ×0.7 Depth 6
20 [0.787]	28	1	ϕ6.5 Counterbore ϕ11 Depth 6.8	$8.2^{+0.1}_{0}$	10	3	$8.2^{-0.05}_{-0.15}$	M6 ×1 Depth 8
25 [0.984]	34	1	ϕ6.5 Counterbore ϕ11 Depth 6.8	$10.2^{+0.1}_{0}$	12	3	$10.2^{-0.05}_{-0.15}$	M6 ×1 Depth 8

Dimensions of Double Acting Long Bushing Type (mm)

● ϕ 32

TBDAM32

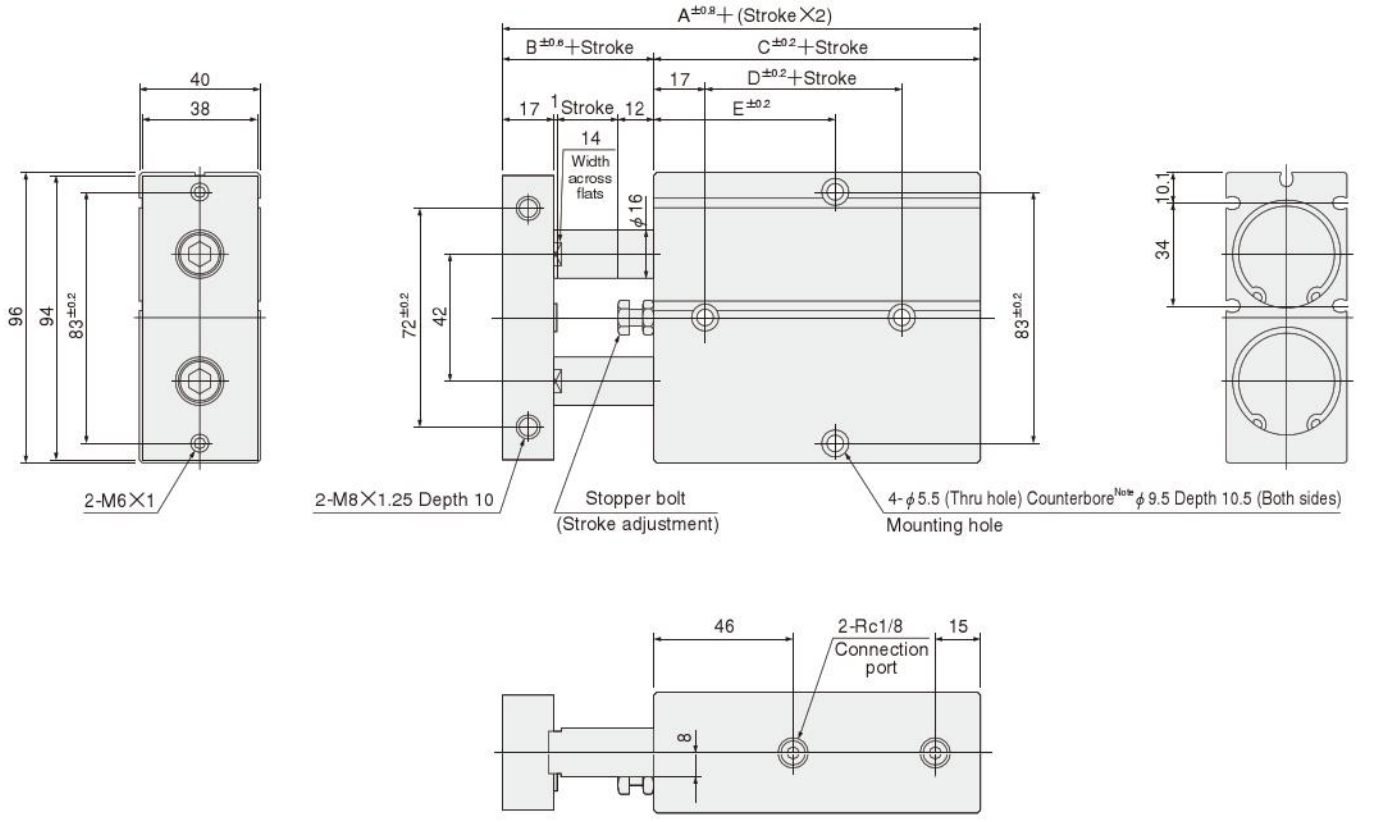

Code / Stroke / Bore mm [in.]	A	B	C	D	E									
					10	20	30	40	50	60	70	80	90	100
32 [1.260]	118	30	88	45	55	60	65	70	75	80	85	90	95	100

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

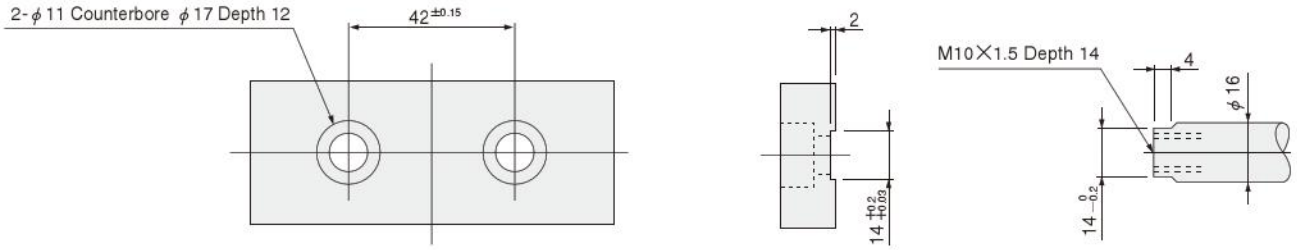

TWIN ROD CYLINDERS
B SERIES

Single Acting Push Type

Symbol



Specifications

Item \ Bore size mm [in.]	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
Operation type	Single acting push type			
Media	Air			
Mounting type	Side mount			
Operating pressure range MPa [psi.]	0.25～0.7 [36～102]	0.2～0.7 [29～102]		
Proof pressure MPa [psi.]	1.05 [152]			
Operating temperature range °C [°F]	0～60 [32～140]			
Operating speed range mm/s [in./sec.]	100～500 [3.9～19.7]			
Cushion	Rubber bumper Note			
Lubrication	Not required (If lubrication is required, use Turbine Oil Class 1 [ISO VG32] or equivalent.)			
Non-rotating accuracy	±0.4°	±0.3°		
Stroke adjusting range mm [in.]	−5～0 [−0.197～0] (To the specification stroke)			
Port size	M5×0.8			

Note: For the 10mm [0.394in.] bore size, rubber bumper is only installed at the pull side. Piston side bumper is not available.

Bore Size and Stroke

mm

Bore size	Standard strokes	Maximum available stroke	Pull side stroke adjusting range
10	10, 20, 30, 40, 50, 60	60	−5～0
16	10, 20, 30, 40, 50, 60	60	
20	10, 20, 30, 40, 50, 60	60	
25	10, 20, 30, 40, 50, 60	60	

Order Codes

TBSA **16×30** – [ ] [ ] [ ]

Twin rod cylinder
B series
single acting push type Note

Bore size
×
Stroke

Sensor switch

Blank — No sensor switch

ZE135 — 2-lead wire, Solid state type	with indicator lamp	DC10～28V	Horizontal lead wire	● For details of sensor switches, see p.1544.
ZE235 — 2-lead wire, Solid state type	with indicator lamp	DC10～28V	Vertical lead wire	
ZE155 — 3-lead wire, Solid state type	with indicator lamp	DC4.5～28V	Horizontal lead wire	
ZE255 — 3-lead wire, Solid state type	with indicator lamp	DC4.5～28V	Vertical lead wire	
ZE101 — 2-lead wire, Reed switch type	without indicator lamp	DC5～28V AC85～115V	Horizontal lead wire	
ZE201 — 2-lead wire, Reed switch type	without indicator lamp	DC5～28V AC85～115V	Vertical lead wire	
ZE102 — 2-lead wire, Reed switch type	with indicator lamp	DC10～28V AC85～115V	Horizontal lead wire	
ZE202 — 2-lead wire, Reed switch type	with indicator lamp	DC10～28V AC85～115V	Vertical lead wire	

Lead wire length
A：1000mm [39in.]
B：3000mm [118in.]

Number of sensor switches
1 — With 1 sensor switch
2 — With 2 sensor switches

Note: In the single acting push type, the magnet for sensor switch is built-in.

Inner Construction and Major Parts

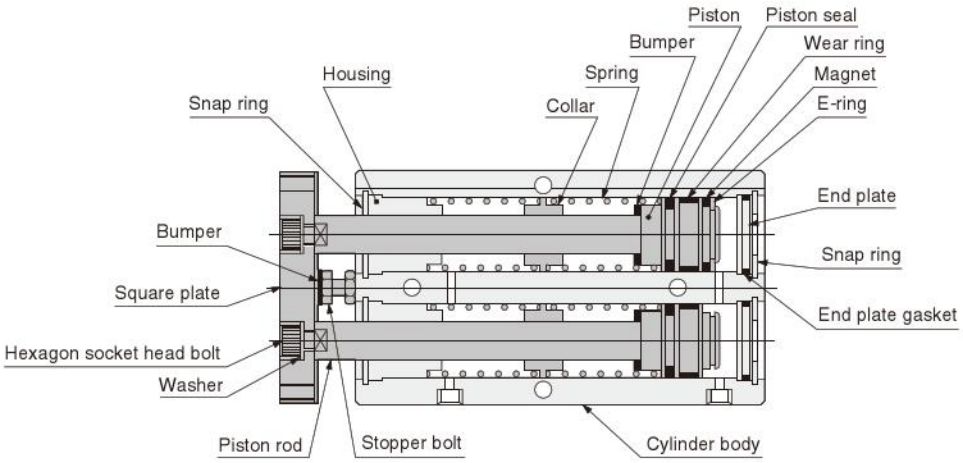

Major Parts and Materials

Parts	Materials
Cylinder body	Aluminum alloy (anodized)
Piston	Aluminum alloy (chromic acid anodic oxide coating)
Wear ring	Plastic
Piston rod	Steel (chrome plated)
Gasket	Synthetic rubber (NBR)
Housing	Aluminum alloy (special wear-resistant treatment)
End plate	Plastic
Seal	Synthetic rubber (NBR)
Snap ring	Steel (nickel plated)
Magnet	Plastic magnet
Spring	Piano wire
Collar	Plastic
E-ring	Stainless steel
Washer	Steel (nickel plated)
Square plate	Mild steel (nickel plated)
Bumper Note	Synthetic rubber (NBR)
Stopper bolt	Mild steel (zinc plated)

Note: For the 10mm [0.394in.] bore size, piston side bumper is not available.

Seals

Item	Piston seal	End plate gasket
Quantity / Bore mm	2	2
10	COP-10L	1.5×9
16	PWP-16	1.5×14.5
20	PWP-20	1.5×18
25	PWP-25	1.5×23

Mass

g [oz.]

Bore size mm [in.]	Basic mass Note1						Additional mass	
	Stroke mm						Mass of 1 sensor switch Note2	
	10	**20**	**30**	**40**	**50**	**60**	**ZE□□□A**	**ZE□□□B**
10 [0.394]	117 [4.13]	137 [4.83]	157 [5.54]	197 [6.95]	217 [7.65]	237 [8.36]	15 [0.53]	35 [1.23]
16 [0.630]	230 [8.11]	257 [9.07]	288 [10.16]	344 [12.13]	369 [13.02]	394 [13.90]		
20 [0.787]	372 [13.12]	407 [14.36]	442 [15.59]	521 [18.38]	556 [19.61]	591 [20.85]		
25 [0.984]	557 [19.65]	603 [21.27]	649 [22.89]	760 [26.81]	814 [28.71]	868 [30.62]		

Notes: 1. The above table is for the standard strokes.
2. There are 2 types of sensor switch lead wire lengths.
A : 1000mm [39in.], B : 3000mm [118in.]

Calculation example: The mass for bore size of 20mm, and stroke of 60mm, with 2 sensor switches (ZE135A),
591+(15×2)=621g [21.90oz.]

Dimensions of Single Acting Push Type (mm)

● ϕ 10

TBSA10

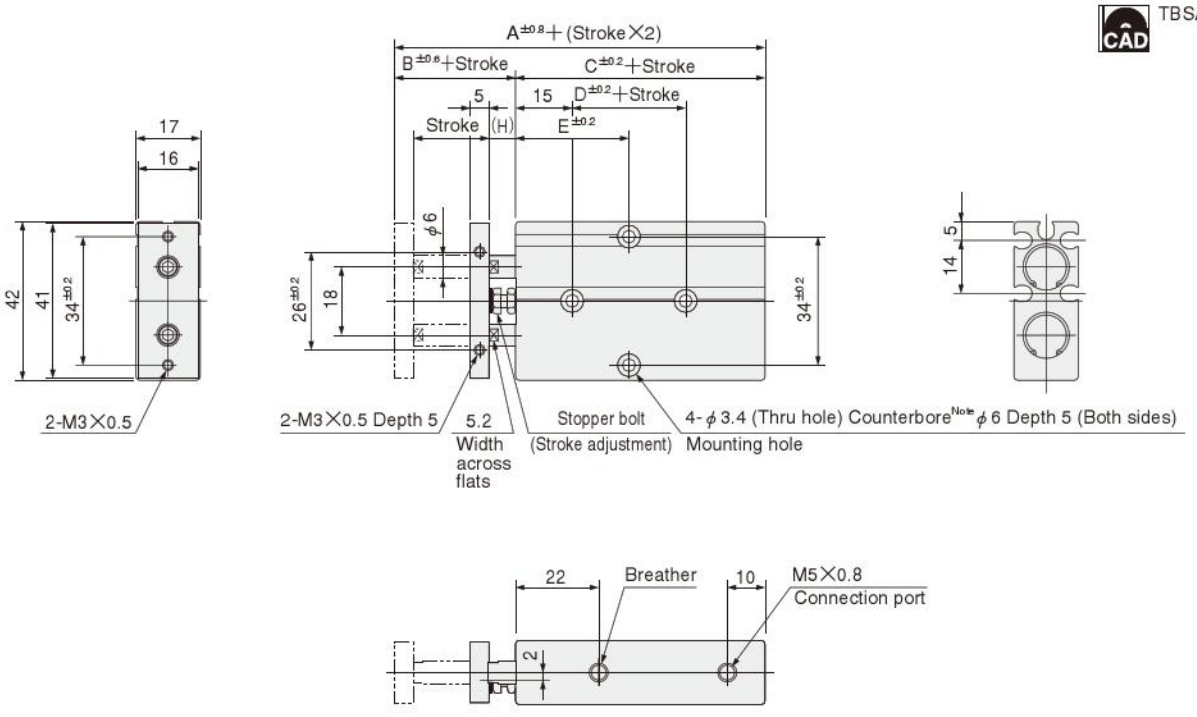

Code / Stroke / Bore mm [in.]	A		B		C		D		E						H	
	10～30	40～60	10～30	40～60	10～30	40～60	10～30	40～60	10	20	30	40	50	60	10～30	40～60
10 [0.394]	58	66	12	10	46	56	10	20	30	30	35	45	50	55	7	5

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

Dimensions of Single Acting Push Type (mm)

● ϕ 16～ ϕ 25

TBSA Bore size

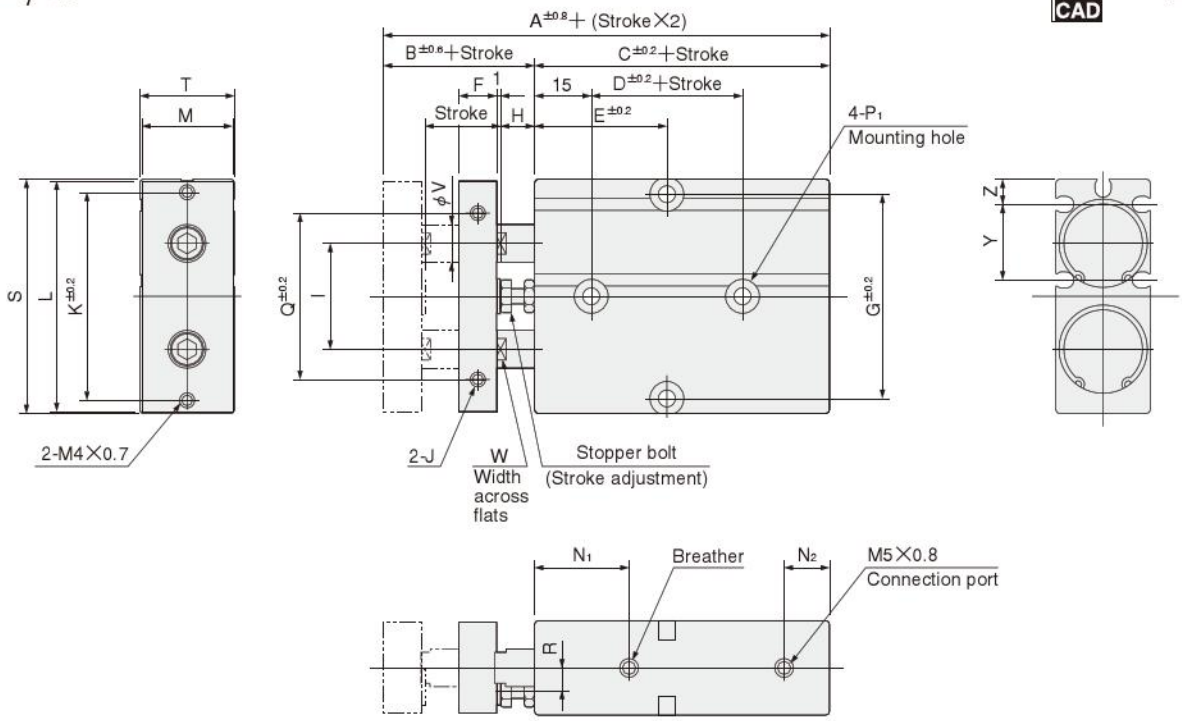

Code / Stroke / Bore mm [in.]	A		B	C		D		E						F	G	H	I	J
	10～30	40～60		10～30	40～60	10～30	40～60	10	20	30	40	50	60					
16 [0.630]	68	78	15	53	63	20	30	30	35	40	50	55	60	8	47	6	24	M4×0.7 Depth 5
20 [0.787]	78	88	20	58	68	20	30	35	35	40	50	55	60	10	55	9	28	M4×0.7 Depth 5
25 [0.984]	81	91	19	62	72	30	40	40	40	45	55	60	65	10	66	8	34	M5×0.8 Depth 6

Bore mm [in.] / Code	K	L	M	N_1	N_2	P_1 Note	Q	R	S	T	V	W	Y	Z
16 [0.630]	47	53	20	22	10	ϕ4.5 (Thru hole) Counterbore ϕ8 Depth 5.5 (Both sides)	34	4	54	21	8	6.2	18.5	5.7
20 [0.787]	55	61	24	25	12	ϕ4.5 (Thru hole) Counterbore ϕ8 Depth 5.5 (Both sides)	44	6	62	25	10	8.2	20	6.8
25 [0.984]	66	72	29	30	12	ϕ4.5 (Thru hole) Counterbore ϕ9 Depth 6 (Both sides)	56	7	73	30	12	10.2	22.5	8.3

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

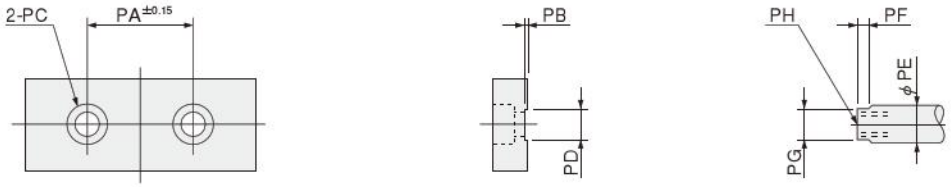

Bore mm [in.] / Code	PA	PB	PC	PD	PE	PF	PG	PH
16 [0.630]	24	1	ϕ4.3 Counterbore ϕ7.8 Depth 4.6	6.2 $^{+0.1}_{0}$	8	3	6.2 $^{-0.05}_{-0.15}$	M4 ×0.7 Depth 6
20 [0.787]	28	1	ϕ6.5 Counterbore ϕ11 Depth 6.8	8.2 $^{+0.1}_{0}$	10	3	8.2 $^{-0.05}_{-0.15}$	M6 ×1 Depth 8
25 [0.984]	34	1	ϕ6.5 Counterbore ϕ11 Depth 6.8	10.2 $^{+0.1}_{0}$	12	3	10.2 $^{-0.05}_{-0.15}$	M6 ×1 Depth 8

TWIN ROD CYLINDERS B SERIES END KEEP CYLINDERS

Double Acting Type

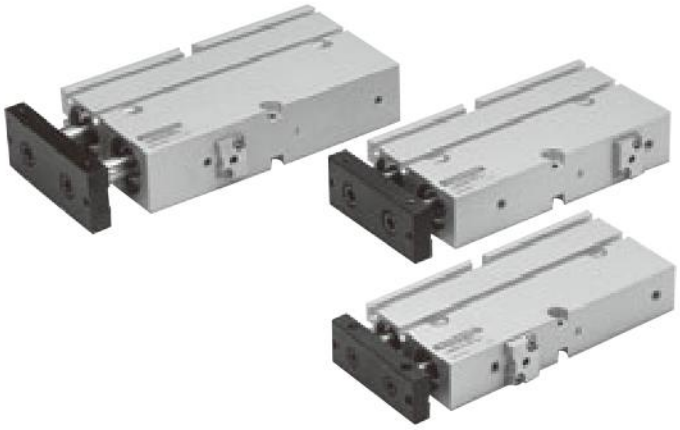

Symbols

● Head side end keep ● Rod side end keep

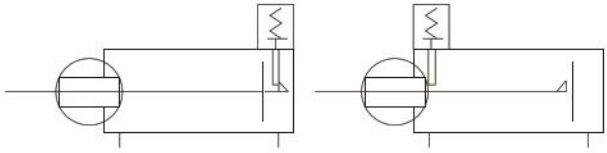

Specifications

Item \ Bore size mm [in.]		16 [0.630]	20 [0.787]	25 [0.984]
Operation type		Double acting type		
Media		Air		
Mounting type		Side mount		
Operating pressure range MPa [psi.]		0.15～0.7 [22～102]		
Proof pressure MPa [psi.]		1.05 [152]		
Operating temperature range °C [°F]		0～60 [32～140]		
Operating speed range mm/s [in./sec.]		100～500 [3.9～19.7]		
Cushion		Rubber bumper		
Lubrication		Not required (If lubrication is required, use Turbine Oil Class 1 [ISO VG32] or equivalent.)		
Non-rotating accuracy		±0.3°		
Stroke adjusting range mm [in.]	-HL	No stroke adjustment, fixed stroke. Note		
	-RL	−5～0 [−0.197～0] (To the specification stroke)		
Max. holding force (At end keep) N [lbf.]		96.1 [21.6]	151 [33.9]	235.4 [52.9]
Backlash (At end keep) mm [in.]		1 [0.039] MAX.		
Port size		M5×0.8		

Note: The stopper bolt is locked into position. Do not attempt to loosen it.

Bore Size and Stroke

mm

Bore size	Standard strokes	Maximum available stroke	Pull side stroke adjusting range	
			-HL	-RL
16	10, 20, 30, 40, 50, 60, 70, 80	180	—	−5～0
20	10, 20, 30, 40, 50, 60, 70, 80	180		
25	10, 20, 30, 40, 50, 60, 70, 80	180		

Note: Consult us for delivery of strokes that exceed the standard strokes.

Order Codes

TBDAK [16×30] – [ ] – [ ] [ ] [ ]

Twin rod cylinder
B series
end keep cylinder Note

Bore size
×
Stroke

End keep position
HL — Head side end keep
RL — Rod side end keep

Sensor switch
Blank — No sensor switch

ZE135	2-lead wire, Solid state type	with indicator lamp	DC10～28V	Horizontal lead wire
ZE235	2-lead wire, Solid state type	with indicator lamp	DC10～28V	Vertical lead wire
ZE155	3-lead wire, Solid state type	with indicator lamp	DC4.5～28V	Horizontal lead wire
ZE255	3-lead wire, Solid state type	with indicator lamp	DC4.5～28V	Vertical lead wire
ZE101	2-lead wire, Reed switch type	without indicator lamp	DC5～28V AC85～115V	Horizontal lead wire
ZE201	2-lead wire, Reed switch type	without indicator lamp	DC5～28V AC85～115V	Vertical lead wire
ZE102	2-lead wire, Reed switch type	with indicator lamp	DC10～28V AC85～115V	Horizontal lead wire
ZE202	2-lead wire, Reed switch type	with indicator lamp	DC10～28V AC85～115V	Vertical lead wire

Lead wire length
A : 1000mm [39in.]
B : 3000mm [118in.]

Number of sensor switches
1 — With 1 sensor switch
2 — With 2 sensor switches

●For details of sensor switches, see p.1544.

Note: In the end keep cylinder, the magnet for sensor switch is built-in.

Inner Construction and Major Parts

● **-HL : Head side end keep**

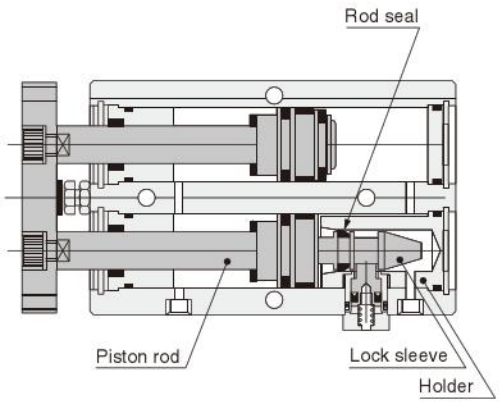

● **-RL : Rod side end keep**

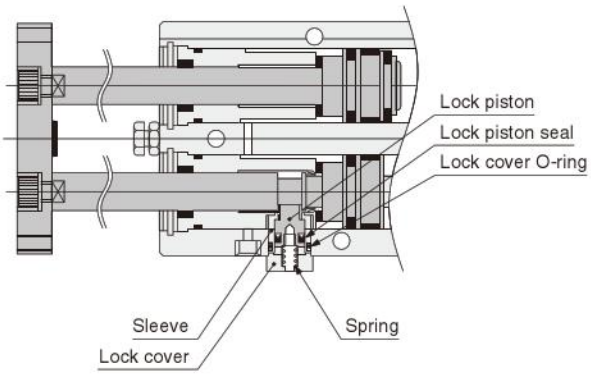

Major Parts and Materials

Parts		Materials
Piston rod	**-HL**	Steel (chrome plated)
	-RL	Steel (chrome plated after heat treatment)
Lock sleeve (Only for -HL)		Steel (heat treated)
Holder (Only for -HL)		Aluminum alloy (anodized)
Lock piston		Steel (chrome plated after heat treatment)
Sleeve		Aluminum alloy (anodized)
Spring		Stainless steel
Lock cover		Aluminum alloy (anodized)
Lock piston seal		Synthetic rubber (NBR)
Rod seal		Synthetic rubber (NBR)
Lock cover O-ring		Synthetic rubber (NBR)

Note: For details of items not listed in the above, see p.760.

Seals

Item / Bore mm \ Quantity	Rod seal	Piston seal	End plate gasket	Rod seal	Housing gasket	Lock piston seal
	2	2	2	1	2	1
16	PIU-8	PWP-16	1.5×14.5	MYN-6	1.5×13	MYN-5
20	PIU-10	PWP-20	1.5×18	MYN-8	1.5×17	MYN-5
25	PIU-12	PWP-25	1.5×23	MYN-10	1.5×22	MYN-5

Mass

g [oz.]

Bore size mm [in.]		Zero stroke mass[Note1]	Additional mass		
			Additional mass for each 10mm [0.394in.] stroke	Mass of 1 sensor switch[Note 2]	
				ZE□□□A	**ZE□□□B**
16 [0.630]	**-HL** : Head side end keep	233 [8.22]	35 [1.23]	15 [0.53]	35 [1.23]
	-RL : Rod side end keep	258 [9.10]	33 [1.16]		
20 [0.787]	**-HL** : Head side end keep	365 [12.87]	50 [1.76]		
	-RL : Rod side end keep	384 [13.54]	49 [1.73]		
25 [0.984]	**-HL** : Head side end keep	633 [22.33]	52 [1.83]		
	-RL : Rod side end keep	661 [23.32]	51 [1.80]		

Notes: 1. The above table is for the standard strokes.
2. There are 2 types of sensor switch lead wire lengths.
A : 1000mm [39in.], B : 3000mm [118in.]

Calculation example: The mass for a head side end keep cylinder, bore size of 20mm, and stroke of 60mm, with 2 sensor switches (ZE135A),
365+(50×6)+(15×2)=695g [24.51oz.]

$$\text{Stroke} \rightarrow \frac{\text{Stroke}}{10}$$

-HL : Dimensions of Head Side End Keep Cylinder (mm)

● ϕ 16～ ϕ 25

CAD TBDAK Bore size H

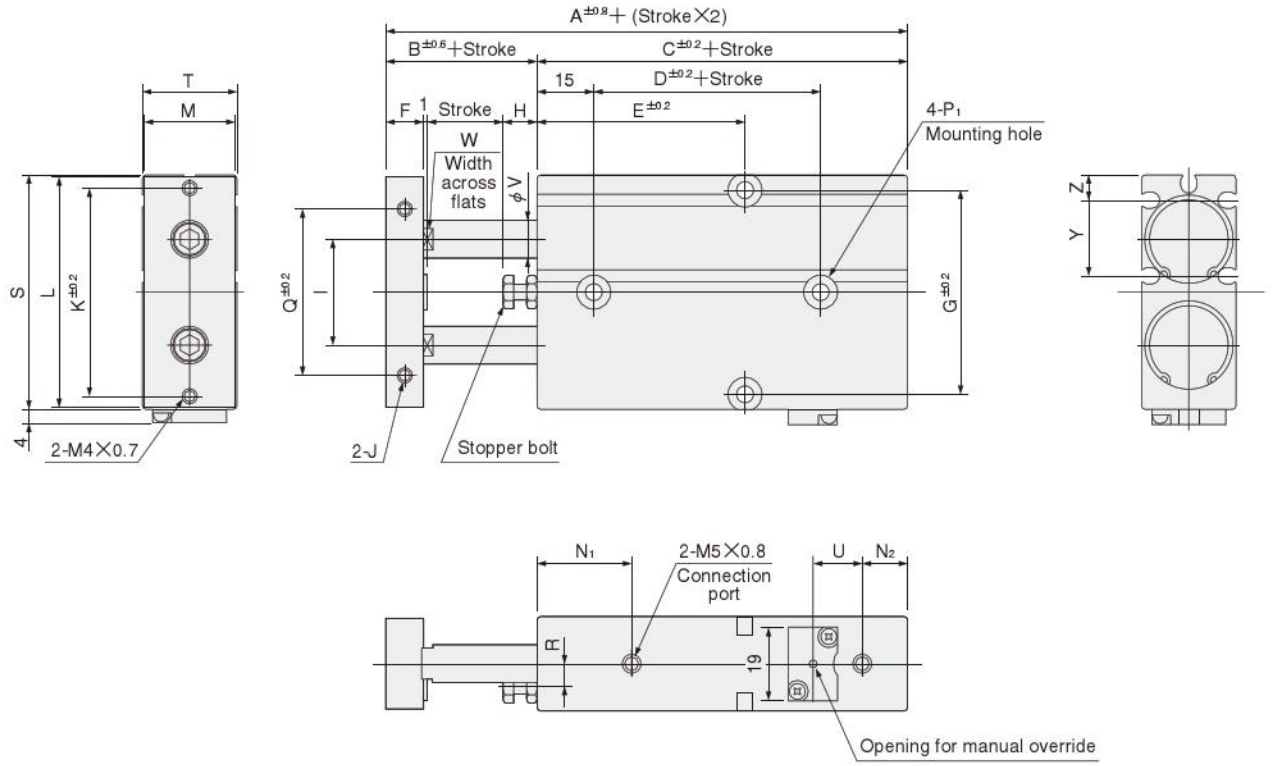

Code / Stroke / Bore mm [in.]	A	B	C	D	E								F	G	H	I	J	K	L	M
					10	20	30	40	50	60	70	80								
16 [0.630]	88	15	73	40	40	45	50	55	60	65	70	75	8	47	6	24	M4×0.7 Depth 5	47	53	20
20 [0.787]	98	20	78	40	40	45	50	55	60	65	70	75	10	55	9	28	M4×0.7 Depth 5	55	61	24
25 [0.984]	101	19	82	50	45	50	55	60	65	70	75	80	10	66	8	34	M5×0.8 Depth 6	66	72	29

Bore mm [in.] / Code	N_1	N_2	P_1 Note	Q	R	S	T	U	V	W	Y	Z
16 [0.630]	22	10	ϕ4.5 (Thru hole) Counterbore ϕ8 Depth 5.5 (Both sides)	34	4	54	21	13	8	6.2	18.5	5.7
20 [0.787]	25	12	ϕ4.5 (Thru hole) Counterbore ϕ8 Depth 5.5 (Both sides)	44	6	62	25	13	10	8.2	20	6.8
25 [0.984]	30	12	ϕ4.5 (Thru hole) Counterbore ϕ9 Depth 6 (Both sides)	56	7	73	30	10	12	10.2	22.5	8.3

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

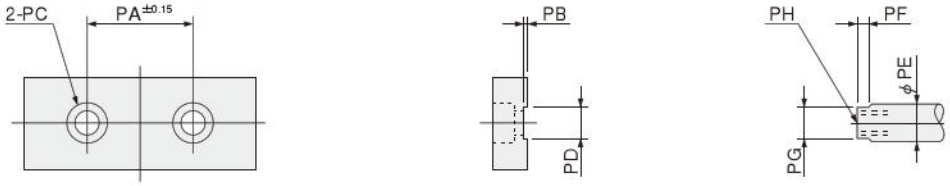

Bore mm [in.] / Code	PA	PB	PC	PD	PE	PF	PG	PH
16 [0.630]	24	1	ϕ4.3 Counterbore ϕ7.8 Depth 4.6	6.2 $^{+0.1}_{0}$	8	3	6.2 $^{-0.05}_{-0.15}$	M4 ×0.7 Depth 6
20 [0.787]	28	1	ϕ6.5 Counterbore ϕ11 Depth 6.8	8.2 $^{+0.1}_{0}$	10	3	8.2 $^{-0.05}_{-0.15}$	M6 ×1 Depth 8
25 [0.984]	34	1	ϕ6.5 Counter bore ϕ11 Depth 6.8	10.2 $^{+0.1}_{0}$	12	3	10.2 $^{-0.05}_{-0.15}$	M6 ×1 Depth 8

-RL : Dimensions of Rod Side End Keep Cylinder (mm)

● ϕ16～ϕ25

CAD TBDAK Bore size R

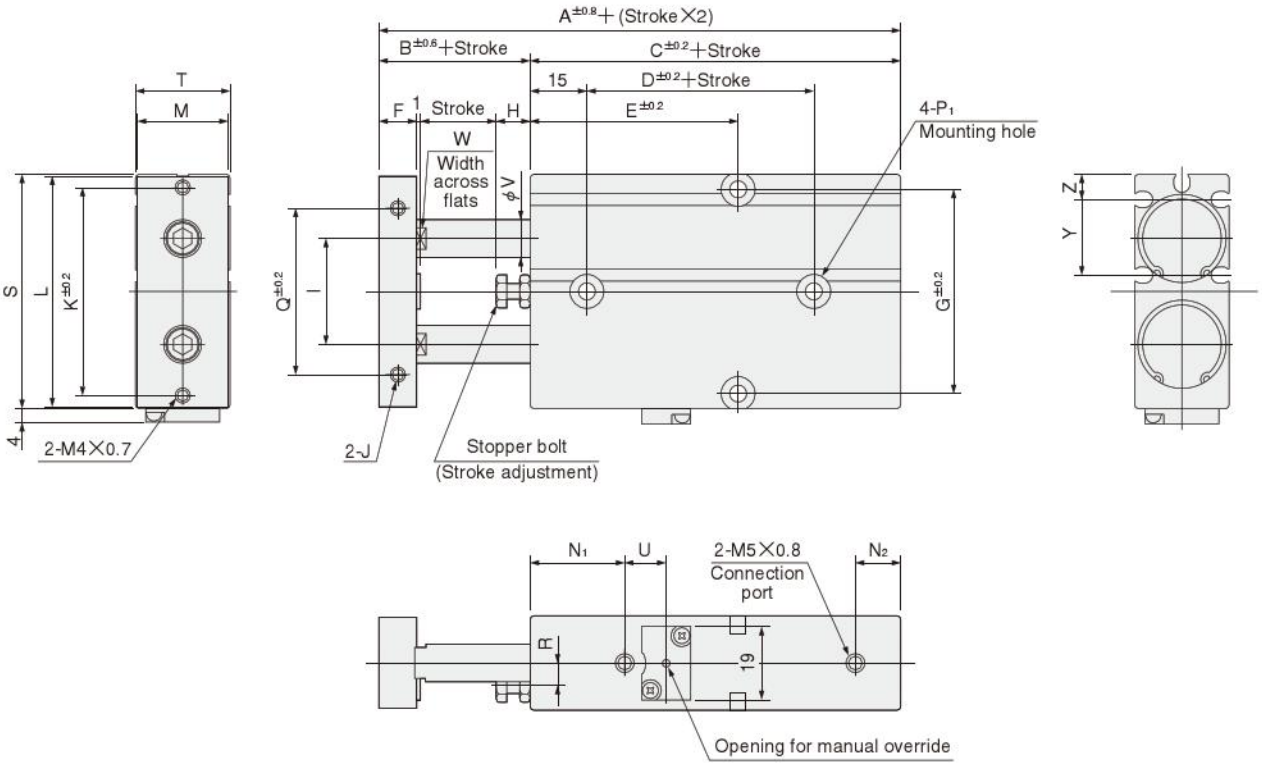

Code / Stroke / Bore mm [in.]	A	B	C	D	E								F	G	H	I	J	K	L	M
					10	20	30	40	50	60	70	80								
16 [0.630]	88	15	73	40	45	45	50	55	60	65	70	75	8	47	6	24	M4×0.7 Depth 5	47	53	20
20 [0.787]	98	20	78	40	45	45	50	55	60	65	70	75	10	55	9	28	M4×0.7 Depth 5	55	61	24
25 [0.984]	101	19	82	50	50	50	55	60	65	70	75	80	10	66	8	34	M5×0.8 Depth 6	66	72	29

Code / Bore mm [in.]	N_1	N_2	P_1 Note	Q	R	S	T	U	V	W	Y	Z
16 [0.630]	22	10	φ4.5 (Thru hole) Counterbore φ8 Depth 5.5 (Both sides)	34	4	54	21	11	8	6.2	18.5	5.7
20 [0.787]	25	12	φ4.5 (Thru hole) Counterbore φ8 Depth 5.5 (Both sides)	44	6	62	25	11	10	8.2	20	6.8
25 [0.984]	30	12	φ4.5 (Thru hole) Counterbore φ9 Depth 6 (Both sides)	56	7	73	30	9	12	10.2	22.5	8.3

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

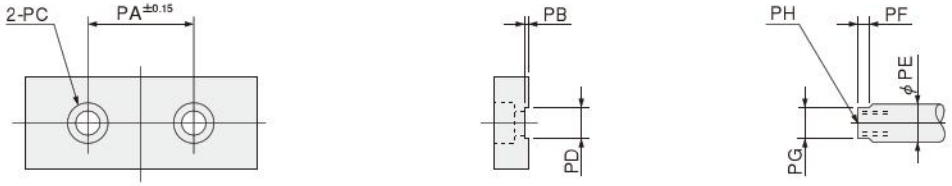

Code / Bore mm [in.]	PA	PB	PC	PD	PE	PF	PG	PH
16 [0.630]	24	1	φ4.3 Counterbore φ7.8 Depth 4.6	$6.2^{+0.1}_{0}$	8	3	$6.2^{-0.05}_{-0.15}$	M4 ×0.7 Depth 6
20 [0.787]	28	1	φ6.5 Counterbore φ11 Depth 6.8	$8.2^{+0.1}_{0}$	10	3	$8.2^{-0.05}_{-0.15}$	M6 ×1 Depth 8
25 [0.984]	34	1	φ6.5 Counterbore φ11 Depth 6.8	$10.2^{+0.1}_{0}$	12	3	$10.2^{-0.05}_{-0.15}$	M6 ×1 Depth 8

SENSOR SWITCHES

Solid State Type, Reed Switch Type

Order Codes

□ □ – TBDA

Lead wire length
A：1000mm [39in.]
B：3000mm [118in.]

Twin rod cylinder B series with sensor switch mounting screw for ϕ 10 [0.394in.]~ ϕ 32 [1.260in.]

Sensor switch

ZE135	2-lead wire, Solid state type with indicator lamp	DC10~28V	Horizontal lead wire	**ZE155**	3-lead wire, Solid state type with indicator lamp	DC4.5~28V	Horizontal lead wire
ZE235	2-lead wire, Solid state type with indicator lamp	DC10~28V	Vertical lead wire	**ZE255**	3-lead wire, Solid state type with indicator lamp	DC4.5~28V	Vertical lead wire
ZE101	2-lead wire, Reed switch type without indicator lamp	DC5~28V AC85~115V	Horizontal lead wire	**ZE102**	2-lead wire, Reed switch type with indicator lamp	DC10~28V AC85~115V	Horizontal lead wire
ZE201	2-lead wire, Reed switch type without indicator lamp	DC5~28V AC85~115V	Vertical lead wire	**ZE202**	2-lead wire, Reed switch type with indicator lamp	DC10~28V AC85~115V	Vertical lead wire

● For details of the sensor switches, see p.1544.

Sensor Switch Operating Range, Response Differential, and Maximum Sensing Location

●Operating range: ℓ
The distance the piston travels in one direction, while the switch is in the ON position.

●Response differential: C
The distance between the point where the piston turns the switch ON and the point where the switch is turned OFF as the piston travels in the opposite direction.

●Sensor switch mounting surface



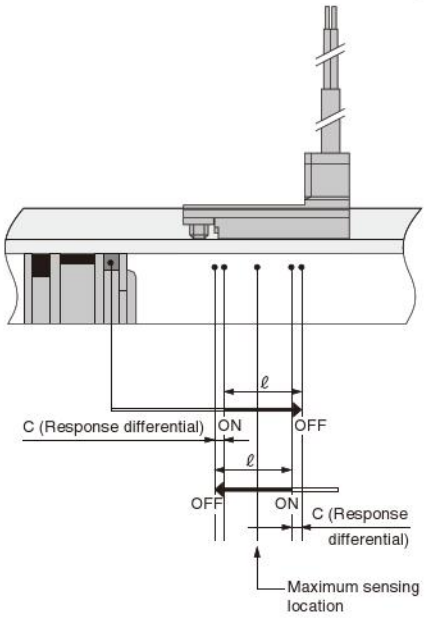

●Solid state type

mm [in.]

Item	Mounting surface \ Bore size mm [in.]	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
Operating range : ℓ	A and C surface	2.5~6 [0.098~0.236]			2.5~6.5 [0.098~0.256]	5~12 [0.197~0.472]
	B surface	2.5~4 [0.098~0.157]	2~4.5 [0.079~0.177]		2.5~5.5 [0.098~0.217]	4~9 [0.157~0.354]
Response differential : C	—	1.0 [0.039] or less	1.2 [0.047] or less		1.5 [0.059] or less	2.0 [0.079] or less
Maximum sensing location Note	—	6 [0.236]				

Note: The above table shows reference values.

●Reed switch type

mm [in.]

Item \ Bore size mm [in.]	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
Operating range : ℓ	6~8.5 [0.236~0.335]		6~8 [0.236~0.315]	7~9.5 [0.276~0.374]	12~16.5 [0.472~0.650]
Response differential : C	1.5 [0.059] or less				2.5 [0.098] or less
Maximum sensing location Note	10 [0.394]				

Note: The above table shows reference values.

When Mounting Cylinders with Sensor Switches in Close Proximity

When mounting cylinders in close proximity,
install the cylinder so that it should not be at or below the values in the following table.

mm [in.]

Status of mounting in close proximity	Code	Type \ Bore size	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
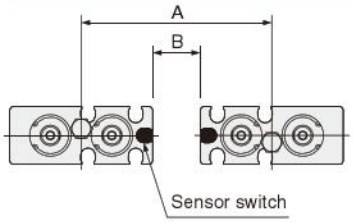	A	Solid state type	53 [2.09]	66 [2.60]	73 [2.87]	87 [3.43]	119 [4.69]
		Reed switch type	48 [1.89]	60 [2.36]	68 [2.68]	81 [3.19]	109 [4.29]
	B	Solid state type	11 [0.43]	12 [0.47]	11 [0.43]	14 [0.55]	23 [0.91]
		Reed switch type	6 [0.24]			8 [0.31]	13 [0.51]
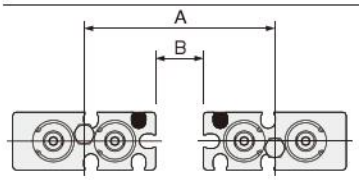	A	Solid state type	47 [1.85]	59 [2.32]	65 [2.56]	77 [3.03]	107 [4.21]
		Reed switch type	42 [1.65]	54 [2.13]	62 [2.44]	73 [2.87]	96 [3.78]
	B	Solid state type	5 [0.20]		3 [0.12]	4 [0.16]	11 [0.43]
		Reed switch type	0				
	A	Solid state type	28 [1.10]	33 [1.30]	36 [1.42]	44 [1.73]	65 [2.56]
		Reed switch type	22 [0.87]	27 [1.06]	30 [1.18]	37 [1.46]	53 [2.09]
	B	Solid state type	11 [0.43]	12 [0.47]	11 [0.43]	14 [0.55]	25 [0.98]
		Reed switch type	5 [0.20]	6 [0.24]	5 [0.20]	7 [0.28]	13 [0.51]
	A	Solid state type	21 [0.83]	24 [0.94]	25 [0.98]	30 [1.18]	44 [1.73]
		Reed switch type	17 [0.67]	21 [0.83]	25 [0.98]	30 [1.18]	40 [1.57]
	B	Solid state type	4 [0.16]	3 [0.12]	0		4 [0.16]
		Reed switch type	0				

Remark: For mounting in configurations other than the above, consult us.

Mounting Location of End of Stroke Detection Sensor Switch

When the sensor switch is mounted in the locations shown below (the figures in the tables are reference values), the magnet comes to the maximum sensing location of the sensor switch at the end of the stroke.

● Double acting type

■ When the lead wires are pulled from the head side.

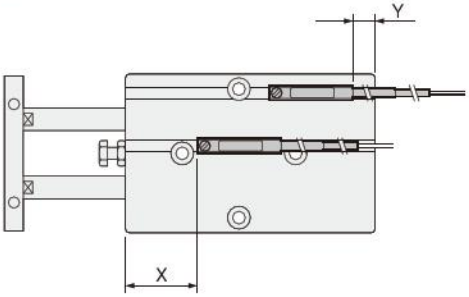

■ When the lead wire of the head side detection sensor switch only is pulled from the rod side.

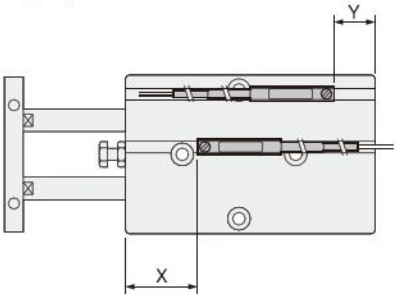

Standard cylinder

●Solid state type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	27.5 [1.083]	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]	52 [2.047]
Y	3.5 [0.138]	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]	11 [0.433]

●Reed switch type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	23.5 [0.925]	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]	48 [1.890]
Y	0.5 [0.020]	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]	8 [0.315]

●Solid state type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	27.5 [1.083]	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]	52 [2.047]
Y	6.5 [0.256]	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]	14 [0.551]

●Reed switch type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	23.5 [0.925]	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]	48 [1.890]
Y	2.5 [0.098]	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]	10 [0.394]

Double acting long bushing type

●Solid state type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	37.5 [1.476]	43.5 [1.713]	47.5 [1.870]	52.5 [2.067]	62 [2.441]
Y	3.5 [0.138]	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]	11 [0.433]

●Reed switch type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	33.5 [1.319]	39.5 [1.555]	43.5 [1.713]	48.5 [1.909]	58 [2.283]
Y	0.5 [0.020]	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]	8 [0.315]

●Solid state type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	37.5 [1.476]	43.5 [1.713]	47.5 [1.870]	52.5 [2.067]	62 [2.441]
Y	6.5 [0.256]	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]	14 [0.551]

●Reed switch type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	33.5 [1.319]	39.5 [1.555]	43.5 [1.713]	48.5 [1.909]	58 [2.283]
Y	2.5 [0.098]	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]	10 [0.394]

End keep cylinder

●Solid state type mm [in.]

End keep position	Code \ Bore	16 [0.630]	20 [0.787]	25 [0.984]
-HL : Head side end keep	X	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]
	Y	24.5 [0.965]	25.5 [1.004]	24.5 [0.965]
-RL : Rod side end keep	X	53.5 [2.106]	57.5 [2.264]	62.5 [2.461]
	Y	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]

●Reed switch type mm [in.]

End keep position	Code \ Bore	16 [0.630]	20 [0.787]	25 [0.984]
-HL : Head side end keep	X	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]
	Y	21.5 [0.846]	22.5 [0.886]	21.5 [0.846]
-RL : Rod side end keep	X	49.5 [1.949]	53.5 [2.106]	58.5 [2.303]
	Y	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]

●Solid state type mm [in.]

End keep position	Code \ Bore	16 [0.630]	20 [0.787]	25 [0.984]
-HL : Head side end keep	X	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]
	Y	27.5 [1.083]	28.5 [1.122]	27.5 [1.083]
-RL : Rod side end keep	X	53.5 [2.106]	57.5 [2.264]	62.5 [2.461]
	Y	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]

●Reed switch type mm [in.]

End keep position	Code \ Bore	16 [0.630]	20 [0.787]	25 [0.984]
-HL : Head side end keep	X	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]
	Y	23.5 [0.925]	24.5 [0.965]	23.5 [0.925]
-RL : Rod side end keep	X	49.5 [1.949]	53.5 [2.106]	58.5 [2.303]
	Y	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]

●Single acting push type

■ When the lead wires are pulled from the head side.

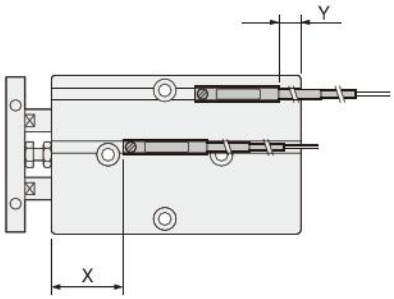

■ When the lead wire of the head side detection sensor switch only is pulled from the rod side.



●Solid state type

mm [in.]

Stroke	Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
10, 20, 30	X	27.5 [1.083]	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]
	Y	3.5 [0.138]	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]
40, 50, 60	X	39.5 [1.555]	43.5 [1.713]	47.5 [1.870]	52.5 [2.067]
	Y	1.5 [0.059]	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]

●Solid state type

mm [in.]

Stroke	Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
10, 20, 30	X	27.5 [1.083]	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]
	Y	6.5 [0.256]	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]
40, 50, 60	X	39.5 [1.555]	43.5 [1.713]	47.5 [1.870]	52.5 [2.067]
	Y	4.5 [0.177]	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]

●Reed switch type

mm [in.]

Stroke	Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
10, 20, 30	X	23.5 [0.925]	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]
	Y	0.5 [0.020]	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]
40, 50, 60	X	35.5 [1.398]	39.5 [1.555]	43.5 [1.713]	48.5 [1.909]
	Y	−1.5 [−0.059]	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]

●Reed switch type

mm [in.]

Stroke	Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
10, 20, 30	X	23.5 [0.925]	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]
	Y	2.5 [0.098]	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]
40, 50, 60	X	35.5 [1.398]	39.5 [1.555]	43.5 [1.713]	48.5 [1.909]
	Y	0.5 [0.020]	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]

Double acting type (TBDA), single acting push type (TBSA)

■In the case of using 4 mounting holes on the body

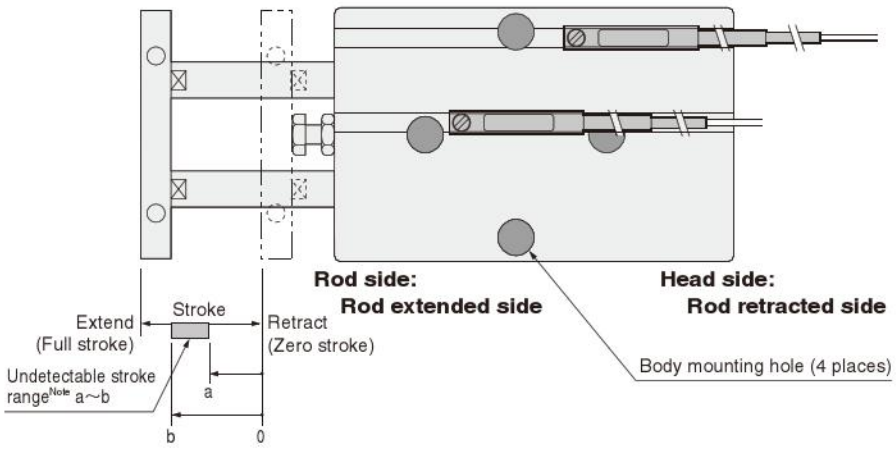

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

●Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions.
The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.
This procedure is not necessary for ϕ 25 [0.984in.] and ϕ 32 [1.260in.], however, where no interference occurs.

●Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		ϕ 10				ϕ 16				ϕ 20				ϕ 25				ϕ 32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	○	○	Groove A (E) : 2~10 Groove B (D) : 7~10 Groove C : 8~10	×	△	△	Groove A (E) : 0~10 Groove B (D) : — Groove C : —	○	○	△	Groove A (E) : 2~10 Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : 9~10 Groove C : —
	Rod side	×	×	×		×	△	△		×	×	△		○	△	△		×	△	△	
20	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 17~20 Groove C : 18~20	×	○	○	Groove A (E) : 0~12 Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : 2~15 Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C :
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 21~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~12 Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : 2~15 Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D), C : 27~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 27~40 Groove C : 28~40	×	○	○	Groove A (E) : 0~12 Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : 2~15 Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D), C : 32~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 32~45 Groove C : 33~44	×	○	○	Groove A (E) : 0~12 Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : 2~15 Groove B (D) : 36~50 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49	×	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	○	○		○	×	○	
60	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 37~50 Groove C : 38~49	×	○	○	Groove A (E) : 0~12 Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : 2~15 Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54	×	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 42~55 Groove C : 43~54	×	○	○	Groove A (E) : 0~12 Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : 2~15 Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	×	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 47~60 Groove C : 48~59	×	○	○	Groove A (E) : 0~12 Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : 2~15 Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	×	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 52~65 Groove C : 53~64	×	○	○	Groove A (E) : 0~12 Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : 2~15 Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	×	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 57~70 Groove C : 58~69	×	○	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : 2~15 Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	×	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 62~75 Groove C : 63~74	×	○	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : 2~15 Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	×	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 67~80 Groove C : 68~79	×	○	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : 2~15 Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	×	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 72~85 Groove C : 73~84	×	○	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : 2~15 Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	×	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 77~90 Groove C : 78~89	×	○	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : 2~15 Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	×	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : 2~15 Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	×	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : 2~15 Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	×	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : 2~15 Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	×	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : 2~15 Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	×	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : 2~15 Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	×	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : 2~15 Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	×	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

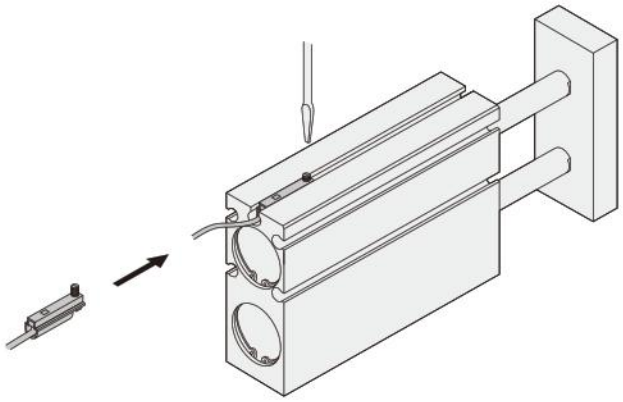

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	○	○	Groove A (E) : 0～10 Groove B (D) : 5～10 Groove C : 6～10	×	×	△	Groove A (E) : 0～10 Groove B (D) : 8～10 Groove C : —	×	○	○	Groove A (E) : 0～10 Groove B (D) : 8～10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0～10 Groove B (D) : — Groove C : —
	Rod side	×	×	×		×	×	△		×	×	×		△	×	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 15～20 Groove C : 16～20	×	○	○	Groove A (E) : 0～14 Groove B (D) : 15～20 Groove C : 17～20	×	○	△	Groove A (E) : 0～17 Groove B (D) : 18～20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0～14 Groove B (D) : — Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 19～30 Groove C : 20～30	×	○	○	Groove A (E) : 0～14 Groove B (D) : 20～30 Groove C : 22～30	×	○	○	Groove A (E) : 0～17 Groove B (D) : 24～30 Groove C : 26～30	○	○	○	Groove A (E) : — Groove B (D), C : 26～30	×	○	○	Groove A (E) : 0～14 Groove B (D) : 27～30 Groove C : 28～30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 25～40 Groove C : 26～40	×	○	○	Groove A (E) : 0～14 Groove B (D) : 25～40 Groove C : 27～40	×	○	○	Groove A (E) : 0～17 Groove B (D) : 29～40 Groove C : 31～40	○	○	○	Groove A (E) : — Groove B (D), C : 31～40	×	○	○	Groove A (E) : 0～14 Groove B (D) : 32～40 Groove C : 33～40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 30～47 Groove C : 31～46	×	○	○	Groove A (E) : 0～14 Groove B (D) : 30～49 Groove C : 32～47	×	○	○	Groove A (E) : 0～17 Groove B (D) : 34～50 Groove C : 36～50	○	○	○	Groove A (E) : — Groove B (D), C : 36～50	×	○	○	Groove A (E) : 0～14 Groove B (D) : 37～49 Groove C : 38～48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 35～52 Groove C : 36～51	×	○	○	Groove A (E) : 0～14 Groove B (D) : 35～54 Groove C : 37～52	×	○	○	Groove A (E) : 0～17 Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56	×	○	○	Groove A (E) : 0～14 Groove B (D) : 42～54 Groove C : 43～53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 40～57 Groove C : 41～56	×	○	○	Groove A (E) : 0～14 Groove B (D) : 40～59 Groove C : 42～57	×	○	○	Groove A (E) : 0～17 Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61	×	○	○	Groove A (E) : 0～14 Groove B (D) : 47～59 Groove C : 48～58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 45～62 Groove C : 46～61	×	○	○	Groove A (E) : 0～12 Groove B (D) : 45～64 Groove C : 47～62	×	○	○	Groove A (E) : 0～17 Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66	×	○	○	Groove A (E) : 0～14 Groove B (D) : 52～64 Groove C : 53～63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 50～67 Groove C : 51～66	×	○	○	Groove A (E) : 0～14 Groove B (D) : 50～69 Groove C : 52～67	×	○	○	Groove A (E) : 0～17 Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71	×	○	○	Groove A (E) : 0～14 Groove B (D) : 57～69 Groove C : 58～68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 55～72 Groove C : 56～71	×	○	○	Groove A (E) : 0～14 Groove B (D) : 55～74 Groove C : 57～72	×	○	○	Groove A (E) : 0～17 Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76	×	○	○	Groove A (E) : 0～14 Groove B (D) : 62～74 Groove C : 63～73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 60～77 Groove C : 61～76	×	○	○	Groove A (E) : 0～14 Groove B (D) : 60～79 Groove C : 62～77	×	○	○	Groove A (E) : 0～17 Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81	×	○	○	Groove A (E) : 0～14 Groove B (D) : 67～79 Groove C : 68～78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 65～82 Groove C : 66～81	×	○	○	Groove A (E) : 0～14 Groove B (D) : 65～84 Groove C : 67～82	×	○	○	Groove A (E) : 0～17 Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86	×	○	○	Groove A (E) : 0～14 Groove B (D) : 72～84 Groove C : 73～83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 70～87 Groove C : 71～86	×	○	○	Groove A (E) : 0～14 Groove B (D) : 70～89 Groove C : 72～87	×	○	○	Groove A (E) : 0～17 Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91	×	○	○	Groove A (E) : 0～14 Groove B (D) : 77～89 Groove C : 78～88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～18 Groove B (D) : 75～92 Groove C : 76～91	×	○	○	Groove A (E) : 0～14 Groove B (D) : 75～94 Groove C : 77～92	×	○	○	Groove A (E) : 0～17 Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96	×	○	○	Groove A (E) : 0～14 Groove B (D) : 82～94 Groove C : 83～93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 80～99 Groove C : 82～97	×	○	○	Groove A (E) : 0～17 Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101	×	○	○	Groove A (E) : 0～14 Groove B (D) : 87～99 Groove C : 88～98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 85～104 Groove C : 87～102	×	○	○	Groove A (E) : 0～17 Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106	×	○	○	Groove A (E) : 0～14 Groove B (D) : 92～104 Groove C : 93～103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 90～109 Groove C : 92～107	×	○	○	Groove A (E) : 0～17 Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111	×	○	○	Groove A (E) : 0～14 Groove B (D) : 97～109 Groove C : 98～108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 95～114 Groove C : 97～112	×	○	○	Groove A (E) : 0～17 Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116	×	○	○	Groove A (E) : 0～14 Groove B (D) : 102～114 Groove C : 103～113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 100～119 Groove C : 102～117	×	○	○	Groove A (E) : 0～17 Groove B (D) : 104～124 Groove C : 106～122	○	○	○	Groove A (E) : — Groove B (D), C : 106～121	×	○	○	Groove A (E) : 0～14 Groove B (D) : 107～119 Groove C : 108～118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 105～124 Groove C : 107～122	×	○	○	Groove A (E) : 0～17 Groove B (D) : 109～129 Groove C : 111～127	○	○	○	Groove A (E) : — Groove B (D), C : 111～126	×	○	○	Groove A (E) : 0～14 Groove B (D) : 112～124 Groove C : 113～123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting type (TBDA), single acting push type (TBSA)

■ In the case of using 2 center mounting holes on the body

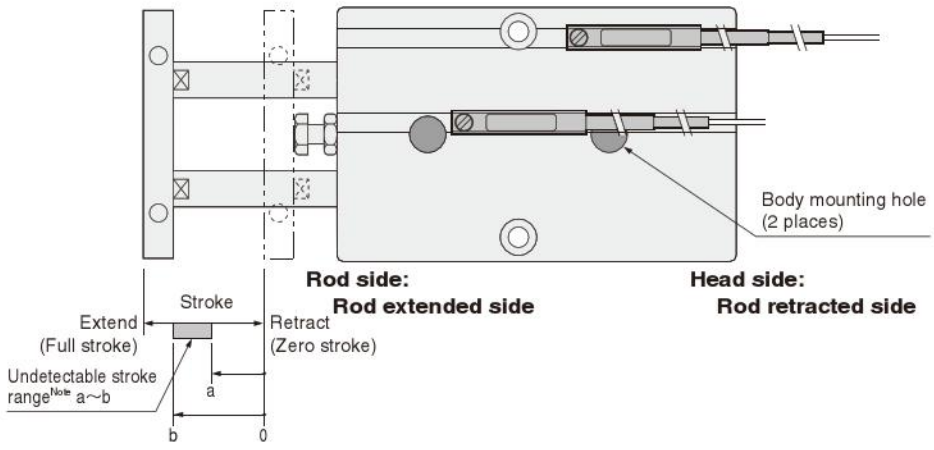

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions.
The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.
This procedure is not necessary for ϕ25 [0.984in.] and ϕ32 [1.260in.], however, where no interference occurs.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		ϕ10				ϕ16				ϕ20				ϕ25				ϕ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	○	○	Groove A (E) : 2~10 Groove B (D), C : —	×	○	○	Groove A (E) : 0~10 Groove B (D), C : —	○	○	○	Groove A (E) : 2~10 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~10 Groove B (D), C : —
	Rod side	×	○	○		×	○	○		×	○	○		○	○	○		×	○	○	
20	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

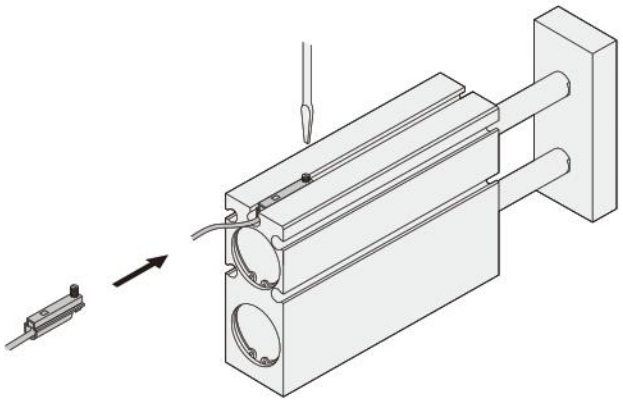

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0~10 Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D), C : —
	Rod side	×	△	△		×	△	△		×	△	△		△	△	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
60	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D), C : —	×	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting type (TBDA), single acting push type (TBSA)

■ In the case of using 2 mounting holes on the body (one on each side)

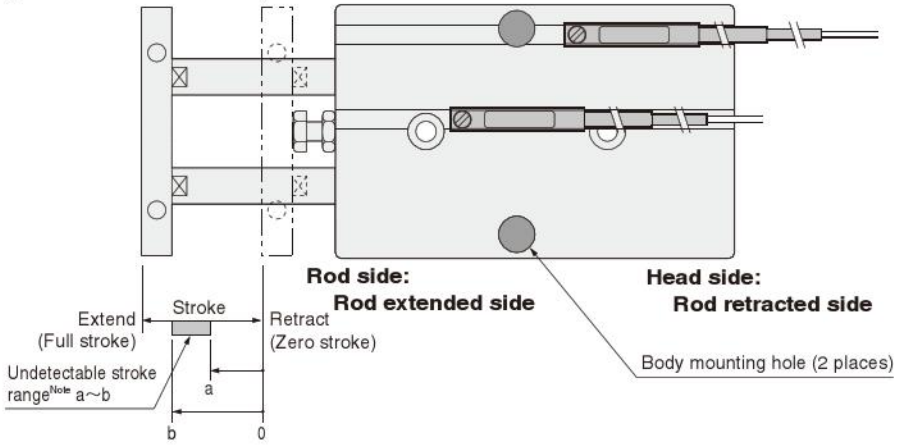

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	○	○	Groove A (E) : — Groove B (D) : 7~10 Groove C : 8~10	○	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	○	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —
	Rod side	○	×	×		○	△	△		△	×	△		○	△	△		○	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 18~20	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 21~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : — Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D), C : 27~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 28~40	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : — Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D), C : 32~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 32~45 Groove C : 33~44	○	○	○	Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : — Groove B (D) : 36~50 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	○	○		○	×	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37~50 Groove C : 38~49	○	○	○	Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : — Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42~55 Groove C : 43~54	○	○	○	Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : — Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47~60 Groove C : 48~59	○	○	○	Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52~65 Groove C : 53~64	○	○	○	Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57~70 Groove C : 58~69	○	○	○	Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62~75 Groove C : 63~74	○	○	○	Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67~80 Groove C : 68~79	○	○	○	Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72~85 Groove C : 73~84	○	○	○	Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77~90 Groove C : 78~89	○	○	○	Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : — Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : — Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : — Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : — Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : — Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : — Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

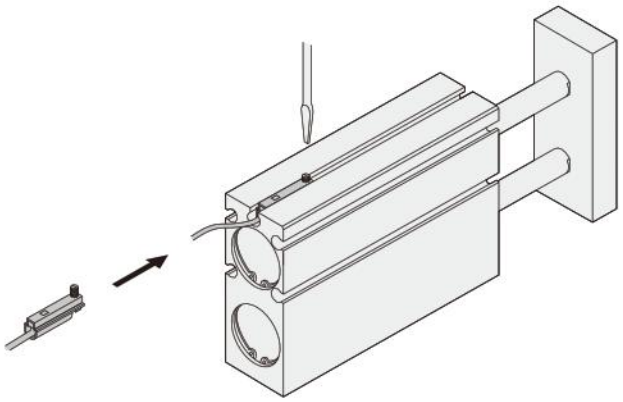

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	○	○	Groove A (E) : — Groove B (D) : 5～10 Groove C : 6～10	△	×	△	Groove A (E) : — Groove B (D) : 8～10 Groove C : —	△	○	○	Groove A (E) : — Groove B (D) : 8～10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D) : 9～10 Groove C : —
	Rod side	△	×	×		△	×	△		△	×	×		△	×	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 16～20	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 17～20	○	○	△	Groove A (E) : — Groove B (D) : 18～20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D) : 19～20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 19～30 Groove C : 20～30	○	○	○	Groove A (E) : — Groove B (D) : 20～30 Groove C : 22～30	○	○	○	Groove A (E) : — Groove B (D) : 24～30 Groove C : 26～30	○	○	○	Groove A (E) : — Groove B (D), C : 26～30	○	○	○	Groove A (E) : — Groove B (D) : 27～30 Groove C : 28～30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25～40 Groove C : 26～40	○	○	○	Groove A (E) : — Groove B (D) : 25～40 Groove C : 27～40	○	○	○	Groove A (E) : — Groove B (D) : 29～40 Groove C : 31～40	○	○	○	Groove A (E) : — Groove B (D), C : 31～40	○	○	○	Groove A (E) : — Groove B (D) : 32～40 Groove C : 33～40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30～47 Groove C : 31～46	○	○	○	Groove A (E) : — Groove B (D) : 30～49 Groove C : 32～47	○	○	○	Groove A (E) : — Groove B (D) : 34～50 Groove C : 36～50	○	○	○	Groove A (E) : — Groove B (D), C : 36～50	○	○	○	Groove A (E) : — Groove B (D) : 37～49 Groove C : 38～48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35～52 Groove C : 36～51	○	○	○	Groove A (E) : — Groove B (D) : 35～54 Groove C : 37～52	○	○	○	Groove A (E) : — Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56	○	○	○	Groove A (E) : — Groove B (D) : 42～54 Groove C : 43～53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40～57 Groove C : 41～56	○	○	○	Groove A (E) : — Groove B (D) : 40～59 Groove C : 42～57	○	○	○	Groove A (E) : — Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61	○	○	○	Groove A (E) : — Groove B (D) : 47～59 Groove C : 48～58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45～62 Groove C : 46～61	○	○	○	Groove A (E) : — Groove B (D) : 45～64 Groove C : 47～62	○	○	○	Groove A (E) : — Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66	○	○	○	Groove A (E) : — Groove B (D) : 52～64 Groove C : 53～63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50～67 Groove C : 51～66	○	○	○	Groove A (E) : — Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : — Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71	○	○	○	Groove A (E) : — Groove B (D) : 57～69 Groove C : 58～68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55～72 Groove C : 56～71	○	○	○	Groove A (E) : — Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : — Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76	○	○	○	Groove A (E) : — Groove B (D) : 62～74 Groove C : 63～73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60～77 Groove C : 61～76	○	○	○	Groove A (E) : — Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : — Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81	○	○	○	Groove A (E) : — Groove B (D) : 67～79 Groove C : 68～78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65～82 Groove C : 66～81	○	○	○	Groove A (E) : — Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : — Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86	○	○	○	Groove A (E) : — Groove B (D) : 72～84 Groove C : 73～83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70～87 Groove C : 71～86	○	○	○	Groove A (E) : — Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : — Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91	○	○	○	Groove A (E) : — Groove B (D) : 77～89 Groove C : 78～88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75～92 Groove C : 76～91	○	○	○	Groove A (E) : — Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : — Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96	○	○	○	Groove A (E) : — Groove B (D) : 82～94 Groove C : 83～93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					○	○	○	Groove A (E) : — Groove B (D) : 80～99 Groove C : 82～97	○	○	○	Groove A (E) : — Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101	○	○	○	Groove A (E) : — Groove B (D) : 87～99 Groove C : 88～98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					○	○	○	Groove A (E) : — Groove B (D) : 85～104 Groove C : 87～102	○	○	○	Groove A (E) : — Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106	○	○	○	Groove A (E) : — Groove B (D) : 92～104 Groove C : 93～103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					○	○	○	Groove A (E) : — Groove B (D) : 90～109 Groove C : 92～107	○	○	○	Groove A (E) : — Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111	○	○	○	Groove A (E) : — Groove B (D) : 97～109 Groove C : 98～108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					○	○	○	Groove A (E) : — Groove B (D) : 95～114 Groove C : 97～112	○	○	○	Groove A (E) : — Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116	○	○	○	Groove A (E) : — Groove B (D) : 102～114 Groove C : 103～113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					○	○	○	Groove A (E) : — Groove B (D) : 100～119 Groove C : 102～117	○	○	○	Groove A (E) : — Groove B (D) : 104～124 Groove C : 106～122	○	○	○	Groove A (E) : — Groove B (D), C : 106～121	○	○	○	Groove A (E) : — Groove B (D) : 107～119 Groove C : 108～118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					○	○	○	Groove A (E) : — Groove B (D) : 105～124 Groove C : 107～122	○	○	○	Groove A (E) : — Groove B (D) : 109～129 Groove C : 111～127	○	○	○	Groove A (E) : — Groove B (D), C : 111～126	○	○	○	Groove A (E) : — Groove B (D) : 112～124 Groove C : 113～123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting type (TBDA), single acting push type (TBSA)

■ In the case of using 3 head side mounting holes on the body

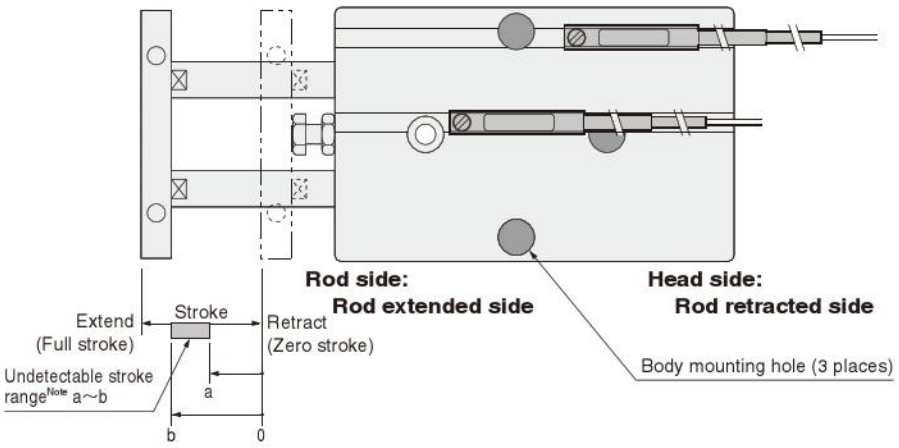

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	○	○	Groove A (E) : 2~10 Groove B (D) : 7~10 Groove C : 8~10	×	△	△	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : —	○	○	△	Groove A (E) : 2~10 Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : 9~10 Groove C : —
	Rod side	×	×	×		×	△	△		×	×	△		○	△	△		×	△	△	
20	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 17~20 Groove C : 18~20	×	○	○	Groove A (E) : 0~12 Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : 2~15 Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 21~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~12 Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : 2~15 Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D), C : 27~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 27~40 Groove C : 28~40	×	○	○	Groove A (E) : 0~12 Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : 2~15 Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D), C : 32~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 32~45 Groove C : 33~44	×	○	○	Groove A (E) : 0~12 Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : 2~15 Groove B (D) : 36~50 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49	×	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	○	○		○	×	○	
60	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 37~50 Groove C : 38~49	×	○	○	Groove A (E) : 0~12 Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : 2~15 Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54	×	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 42~55 Groove C : 43~54	×	○	○	Groove A (E) : 0~12 Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : 2~15 Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	×	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 47~60 Groove C : 48~59	×	○	○	Groove A (E) : 0~12 Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : 2~15 Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	×	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 52~65 Groove C : 53~64	×	○	○	Groove A (E) : 0~12 Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : 2~15 Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	×	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 57~70 Groove C : 58~69	×	○	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : 2~15 Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	×	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 62~75 Groove C : 63~74	×	○	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : 2~15 Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	×	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 67~80 Groove C : 68~79	×	○	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : 2~15 Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	×	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 72~85 Groove C : 73~84	×	○	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : 2~15 Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	×	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 77~90 Groove C : 78~89	×	○	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : 2~15 Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	×	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : 2~15 Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	×	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : 2~15 Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	×	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : 2~15 Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	×	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : 2~15 Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	×	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : 2~15 Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	×	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : 2~15 Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	×	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

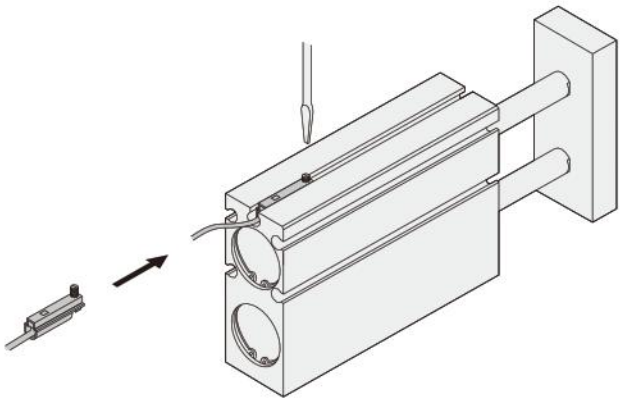

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		ϕ10				ϕ16				ϕ20				ϕ25				ϕ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	○	○	Groove A (E) : 0~10 Groove B (D) : 5~10 Groove C : 6~10	×	×	△	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : —	×	○	○	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : 9~10 Groove C : —
	Rod side	×	×	×		×	×	△		×	×	×		△	×	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 15~20 Groove C : 16~20	×	○	○	Groove A (E) : 0~14 Groove B (D) : 15~20 Groove C : 17~20	×	○	△	Groove A (E) : 0~17 Groove B (D) : 18~20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 19~30 Groove C : 20~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 20~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~17 Groove B (D) : 24~30 Groove C : 26~30	○	○	○	Groove A (E) : — Groove B (D), C : 26~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 25~40 Groove C : 26~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 25~40 Groove C : 27~40	×	○	○	Groove A (E) : 0~17 Groove B (D) : 29~40 Groove C : 31~40	○	○	○	Groove A (E) : — Groove B (D), C : 31~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 30~47 Groove C : 31~46	×	○	○	Groove A (E) : 2~14 Groove B (D) : 30~49 Groove C : 32~47	×	○	○	Groove A (E) : 0~17 Groove B (D) : 34~50 Groove C : 36~50	○	○	○	Groove A (E) : — Groove B (D), C : 36~50	×	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 35~52 Groaove C : 36~51	×	○	○	Groove A (E) : 0~14 Groove B (D) : 35~54 Groove C : 37~52	×	○	○	Groove A (E) : 0~17 Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D), C : 41~56	×	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 40~57 Groove C : 41~56	×	○	○	Groove A (E) : 0~14 Groove B (D) : 40~59 Groove C : 42~57	×	○	○	Groove A (E) : 0~17 Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D), C : 46~61	×	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 45~62 Groove C : 46~61	×	○	○	Groove A (E) : 0~12 Groove B (D) : 45~64 Groove C : 47~62	×	○	○	Groove A (E) : 0~17 Groove B (D) : 49~69 Groove C : 51~62	○	○	○	Groove A (E) : — Groove B (D), C : 51~66	×	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 50~67 Groove C : 51~66	×	○	○	Groove A (E) : 0~14 Groove B (D) : 50~69 Groove C : 52~67	×	○	○	Groove A (E) : 0~17 Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D), C : 56~71	×	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 55~72 Groove C : 56~71	×	○	○	Groove A (E) : 0~14 Groove B (D) : 55~74 Groove C : 57~72	×	○	○	Groove A (E) : 0~17 Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76	×	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 60~77 Groove C : 61~76	×	○	○	Groove A (E) : 0~14 Groove B (D) : 60~79 Groove C : 62~77	×	○	○	Groove A (E) : 0~17 Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81	×	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 65~82 Groove C : 66~81	×	○	○	Groove A (E) : 0~14 Groove B (D) : 65~84 Groove C : 67~82	×	○	○	Groove A (E) : 0~17 Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86	×	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 70~87 Groove C : 71~86	×	○	○	Groove A (E) : 0~14 Groove B (D) : 70~89 Groove C : 72~87	×	○	○	Groove A (E) : 0~17 Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91	×	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 75~92 Groove C : 76~91	×	○	○	Groove A (E) : 0~14 Groove B (D) : 75~94 Groove C : 77~92	×	○	○	Groove A (E) : 0~17 Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96	×	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 80~99 Groove C : 82~97	×	○	○	Groove A (E) : 0~17 Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101	×	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 85~104 Groove C : 87~102	×	○	○	Groove A (E) : 0~17 Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106	×	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 90~109 Groove C : 92~107	×	○	○	Groove A (E) : 2~15 Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111	×	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 95~114 Groove C : 97~112	×	○	○	Groove A (E) : 0~17 Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116	×	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 100~119 Groove C : 102~117	×	○	○	Groove A (E) : 0~17 Groove B (D) : 104~124 Groove C : 106~122	○	○	○	Groove A (E) : — Groove B (D), C : 106~121	×	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 105~124 Groove C : 107~122	×	○	○	Groove A (E) : 0~17 Groove B (D) : 109~129 Groove C : 111~127	○	○	○	Groove A (E) : — Groove B (D), C : 111~126	×	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting type (TBDA), single acting push type (TBSA)

■ In the case of using 3 rod side mounting holes on the body

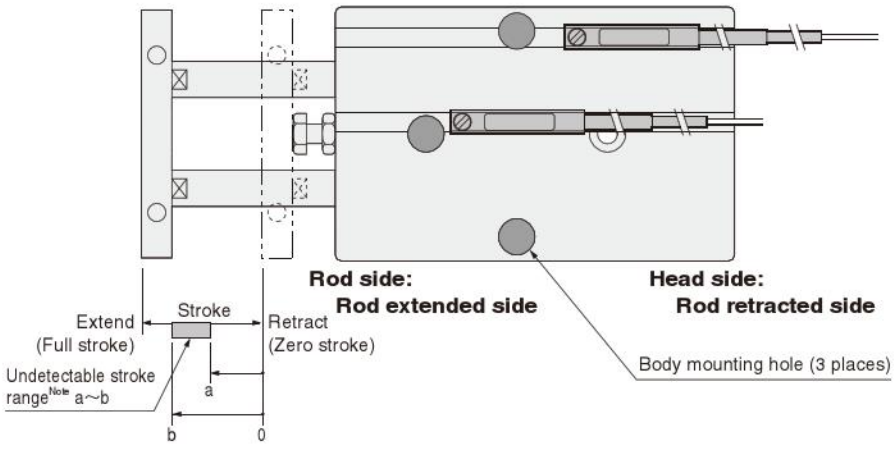

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size	Mounting groove / Stroke		φ10 A E	φ10 B D	φ10 C	φ10 Undetectable stroke range of sensor switch	φ16 A E	φ16 B D	φ16 C	φ16 Undetectable stroke range of sensor switch	φ20 A E	φ20 B D	φ20 C	φ20 Undetectable stroke range of sensor switch	φ25 A E	φ25 B D	φ25 C	φ25 Undetectable stroke range of sensor switch	φ32 A E	φ32 B D	φ32 C	φ32 Undetectable stroke range of sensor switch
10	Head side		○	○	○	Groove A (E) : — Groove B (D) : 7~10 Groove C : 8~10	○	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	○	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —
	Rod side		○	×	×		○	△	△		△	×	△		○	△	△		○	△	△	
20	Head side		○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 18~20	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —
	Rod side		○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side		○	○	○	Groove A (E) : — Groove B (D) : 21~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : — Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D), C : 27~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30
	Rod side		○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side		○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 28~40	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : — Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D), C : 32~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40
	Rod side		○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side		○	○	○	Groove A (E) : — Groove B (D) : 32~45 Groove C : 33~44	○	○	○	Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : — Groove B (D) : 36~50 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48
	Rod side		○	○	○		○	○	○		○	×	×		○	○	○		○	×	○	
60	Head side		○	○	○	Groove A (E) : — Groove B (D) : 37~50 Groove C : 38~49	○	○	○	Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : — Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side		○	○	○	Groove A (E) : — Groove B (D) : 42~55 Groove C : 43~54	○	○	○	Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : — Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side		○	○	○	Groove A (E) : — Groove B (D) : 47~60 Groove C : 48~59	○	○	○	Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side		○	○	○	Groove A (E) : — Groove B (D) : 52~65 Groove C : 53~64	○	○	○	Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side		○	○	○	Groove A (E) : — Groove B (D) : 57~70 Groove C : 58~69	○	○	○	Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side		○	○	○	Groove A (E) : — Groove B (D) : 62~75 Groove C : 63~74	○	○	○	Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side		○	○	○	Groove A (E) : — Groove B (D) : 67~80 Groove C : 68~79	○	○	○	Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side		○	○	○	Groove A (E) : — Groove B (D) : 72~85 Groove C : 73~84	○	○	○	Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side		○	○	○	Groove A (E) : — Groove B (D) : 77~90 Groove C : 78~89	○	○	○	Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side		○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side						○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : — Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98
	Rod side						○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side						○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : — Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side						○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side						○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : — Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side						○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side						○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : — Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side						○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side						○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : — Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side						○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side						○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : — Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side						○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

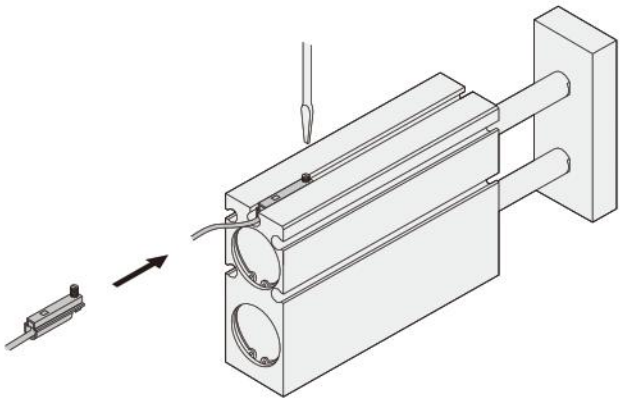

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	○	○	Groove A (E) : — Groove B (D) : 5～10 Groove C : 6～10	△	×	△	Groove A (E) : — Groove B (D) : 8～10 Groove C : —	△	○	○	Groove A (E) : — Groove B (D) : 8～10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D), C : 9～10 Groove C : —
	Rod side	△	×	×		△	×	△		△	×	×		△	×	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 16～20	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 17～20	○	○	△	Groove A (E) : — Groove B (D) : 18～20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D), C : 19～20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 19～30 Groove C : 20～30	○	○	○	Groove A (E) : — Groove B (D) : 20～30 Groove C : 22～30	○	○	○	Groove A (E) : — Groove B (D) : 24～30 Groove C : 26～30	○	○	○	Groove A (E) : — Groove B (D), C : 26～30	○	○	○	Groove A (E) : — Groove B (D), C : 27～30 Groove C : 28～30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25～40 Groove C : 26～40	○	○	○	Groove A (E) : — Groove B (D) : 25～40 Groove C : 27～40	○	○	○	Groove A (E) : — Groove B (D) : 29～40 Groove C : 31～40	○	○	○	Groove A (E) : — Groove B (D), C : 31～40	○	○	○	Groove A (E) : — Groove B (D) : 32～40 Groove C : 33～40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30～47 Groove C : 31～46	○	○	○	Groove A (E) : — Groove B (D) : 30～49 Groove C : 32～47	○	○	○	Groove A (E) : — Groove B (D) : 34～50 Groove C : 36～50	○	○	○	Groove A (E) : — Groove B (D), C : 36～50	○	○	○	Groove A (E) : — Groove B (D) : 37～49 Groove C : 38～48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35～52 Groove C : 36～51	○	○	○	Groove A (E) : — Groove B (D) : 35～54 Groove C : 37～52	○	○	○	Groove A (E) : — Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56	○	○	○	Groove A (E) : — Groove B (D) : 42～54 Groove C : 43～53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40～57 Groove C : 41～56	○	○	○	Groove A (E) : — Groove B (D) : 40～59 Groove C : 42～57	○	○	○	Groove A (E) : — Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61	○	○	○	Groove A (E) : — Groove B (D) : 47～59 Groove C : 48～58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45～62 Groove C : 46～61	○	○	○	Groove A (E) : — Groove B (D) : 45～64 Groove C : 47～62	○	○	○	Groove A (E) : — Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66	○	○	○	Groove A (E) : — Groove B (D) : 52～64 Groove C : 53～63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50～67 Groove C : 51～66	○	○	○	Groove A (E) : — Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : — Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71	○	○	○	Groove A (E) : — Groove B (D) : 57～69 Groove C : 58～68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55～72 Groove C : 56～71	○	○	○	Groove A (E) : — Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : — Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76	○	○	○	Groove A (E) : — Groove B (D) : 62～74 Groove C : 63～73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60～77 Groove C : 61～76	○	○	○	Groove A (E) : — Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : — Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81	○	○	○	Groove A (E) : — Groove B (D) : 67～79 Groove C : 68～78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65～82 Groove C : 66～81	○	○	○	Groove A (E) : — Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : — Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86	○	○	○	Groove A (E) : — Groove B (D) : 72～84 Groove C : 73～83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70～87 Groove C : 71～86	○	○	○	Groove A (E) : — Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : — Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91	○	○	○	Groove A (E) : — Groove B (D) : 77～89 Groove C : 78～88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75～92 Groove C : 76～91	○	○	○	Groove A (E) : — Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : — Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96	○	○	○	Groove A (E) : — Groove B (D) : 82～94 Groove C : 83～93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					○	○	○	Groove A (E) : — Groove B (D) : 80～99 Groove C : 82～97	○	○	○	Groove A (E) : — Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101	○	○	○	Groove A (E) : — Groove B (D) : 87～99 Groove C : 88～98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					○	○	○	Groove A (E) : — Groove B (D) : 85～104 Groove C : 87～102	○	○	○	Groove A (E) : — Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106	○	○	○	Groove A (E) : — Groove B (D) : 92～104 Groove C : 93～103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					○	○	○	Groove A (E) : — Groove B (D) : 90～109 Groove C : 92～107	○	○	○	Groove A (E) : — Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111	○	○	○	Groove A (E) : — Groove B (D) : 97～109 Groove C : 98～108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					○	○	○	Groove A (E) : — Groove B (D) : 95～114 Groove C : 97～112	○	○	○	Groove A (E) : — Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116	○	○	○	Groove A (E) : — Groove B (D) : 102～114 Groove C : 103～113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					○	○	○	Groove A (E) : — Groove B (D) : 100～119 Groove C : 102～117	○	○	○	Groove A (E) : — Groove B (D) : 104～124 Groove C : 106～122	○	○	○	Groove A (E) : — Groove B (D), C : 106～121	○	○	○	Groove A (E) : — Groove B (D) : 107～119 Groove C : 108～118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					○	○	○	Groove A (E) : — Groove B (D) : 105～124 Groove C : 107～122	○	○	○	Groove A (E) : — Groove B (D) : 109～129 Groove C : 111～127	○	○	○	Groove A (E) : — Groove B (D), C : 111～126	○	○	○	Groove A (E) : — Groove B (D) : 112～124 Groove C : 113～123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting long bushing type (TBDAM)

■In the case of using 4 mounting holes on the body

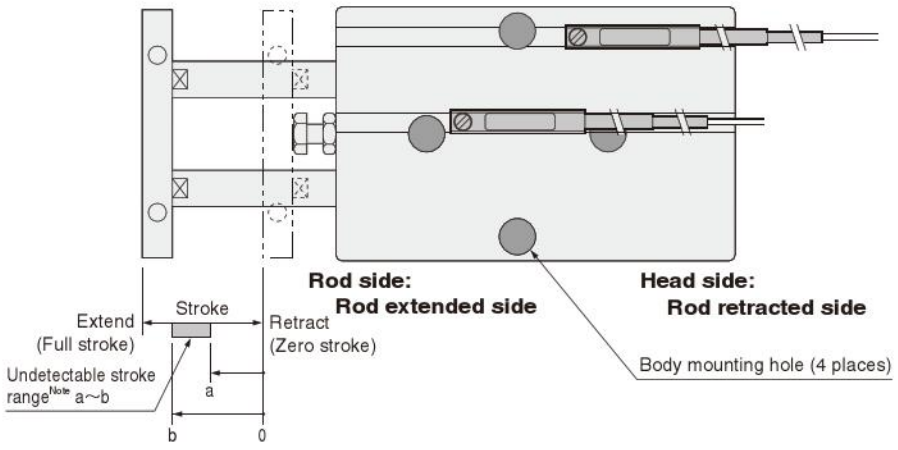

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

●Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.
This procedure is not necessary for ϕ 25 [0.984in.] and ϕ 32 [1.260in.], however, where no interference occurs.

●Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ 10				ϕ 16				ϕ 20				ϕ 25				ϕ 32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	○	Groove A (E) : 0~10 Groove B (D) : 7~10 Groove C : 8~10	×	△	△	Groove A (E) : 0~10 Groove B (D) : — Groove C : —	○	○	△	Groove A (E) : 2~10 Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : 9~10 Groove C : —
	Rod side	×	△	○		×	△	△		×	×	△		○	△	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 17~20 Groove C : 18~20	×	○	○	Groove A (E) : 0~12 Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : 2~15 Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 21~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~12 Groove B (D) : 22~30 Groove C : 24~30	○	○	△	Groove A (E) : 2~15 Groove B (D) : 28~30 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	△		○	○	○		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 27~40 Groove C : 28~40	×	○	○	Groove A (E) : 0~12 Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : 2~15 Groove B (D) : 36~40 Groove C : 38~40	○	○	○	Groove A (E) : — Groove B (D), C : 37~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 32~45 Groove C : 33~44	×	○	○	Groove A (E) : 0~12 Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : 2~15 Groove B (D) : 41~50 Groove C : 43~50	○	○	○	Groove A (E) : — Groove B (D), C : 42~50	×	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 37~50 Groove C : 38~49	×	○	○	Groove A (E) : 0~12 Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : 2~15 Groove B (D) : 46~60 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	×	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	×	×		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 42~55 Groove C : 43~54	×	○	○	Groove A (E) : 0~12 Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : 2~15 Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	×	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 47~60 Groove C : 48~59	×	○	○	Groove A (E) : 0~12 Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : 2~15 Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	×	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 52~65 Groove C : 53~64	×	○	○	Groove A (E) : 0~12 Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : 2~15 Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	×	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 57~70 Groove C : 58~69	×	○	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : 2~15 Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	×	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 62~75 Groove C : 63~74	×	○	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : 2~15 Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	×	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 67~80 Groove C : 68~79	×	○	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : 2~15 Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	×	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 72~85 Groove C : 73~84	×	○	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : 2~15 Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	×	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 77~90 Groove C : 78~89	×	○	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : 2~15 Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	×	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : 2~15 Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	×	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : 2~15 Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	×	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : 2~15 Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	×	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : 2~15 Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	×	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : 2~15 Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	×	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : 2~15 Groove B (D) : 116~132 Groove C : 118~130	○	○	○	Groove A (E) : — Groove B (D), C : 117~129	×	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

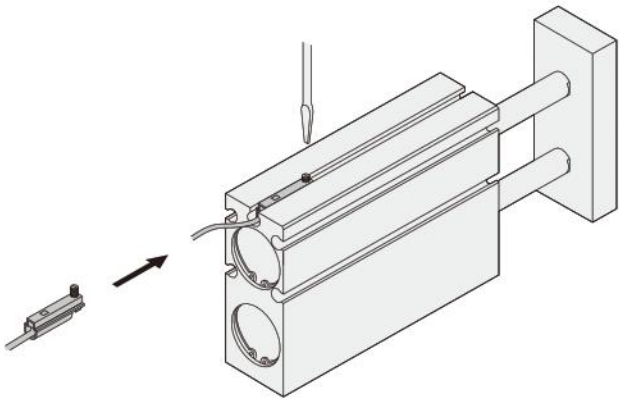

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0～10 Groove B (D) : 5～10 Groove C : 6～10	×	×	△	Groove A (E) : 0～10 Groove B (D) : 8～10 Groove C : —	×	○	○	Groove A (E) : 0～10 Groove B (D) : 8～10 Groove C : 10	△	△	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0～10 Groove B (D) : — Groove C : —
	Rod side	×	△	△		×	×	△		×	×	×		△	△	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 15～20 Groove C : 16～20	×	○	○	Groove A (E) : 0～14 Groove B (D) : 15～20 Groove C : 17～20	×	○	△	Groove A (E) : 0～17 Groove B (D) : 18～20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0～14 Groove B (D) : — Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 19～30 Groove C : 20～30	×	○	○	Groove A (E) : 0～14 Groove B (D) : 20～30 Groove C : 22～30	×	○	△	Groove A (E) : 0～17 Groove B (D) : 28～30 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D) : 27～30 Groove C : 28～30
	Rod side	○	×	×		○	×	×		○	×	△		○	○	○		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 25～40 Groove C : 26～40	×	○	○	Groove A (E) : 0～14 Groove B (D) : 25～40 Groove C : 27～40	×	○	○	Groove A (E) : 0～17 Groove B (D) : 34～40 Groove C : 36～40	○	○	○	Groove A (E) : — Groove B (D), C : 36～40	×	○	○	Groove A (E) : 0～14 Groove B (D) : 32～40 Groove C : 33～40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 30～47 Groove C : 31～46	×	○	○	Groove A (E) : 0～14 Groove B (D) : 30～49 Groove C : 32～47	×	○	○	Groove A (E) : 0～17 Groove B (D) : 39～50 Groove C : 41～50	○	○	○	Groove A (E) : — Groove B (D), C : 41～50	×	○	○	Groove A (E) : 0～14 Groove B (D) : 37～49 Groove C : 38～48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 35～52 Groove C : 36～51	×	○	○	Groove A (E) : 0～14 Groove B (D) : 35～54 Groove C : 37～52	×	○	○	Groove A (E) : 0～17 Groove B (D) : 44～60 Groove C : 46～60	○	○	○	Groove A (E) : — Groove B (D), C : 46～60	×	○	○	Groove A (E) : 0～14 Groove B (D) : 42～54 Groove C : 43～53
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 40～57 Groove C : 41～56	×	○	○	Groove A (E) : 0～14 Groove B (D) : 40～59 Groove C : 42～57	×	○	○	Groove A (E) : 0～17 Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66	×	○	○	Groove A (E) : 0～14 Groove B (D) : 47～59 Groove C : 48～58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 45～62 Groove C : 46～61	×	○	○	Groove A (E) : 0～14 Groove B (D) : 45～64 Groove C : 47～62	×	○	○	Groove A (E) : 0～17 Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71	×	○	○	Groove A (E) : 0～14 Groove B (D) : 52～64 Groove C : 53～63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 50～67 Groove C : 51～66	×	○	○	Groove A (E) : 0～14 Groove B (D) : 50～69 Groove C : 52～67	×	○	○	Groove A (E) : 0～17 Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76	×	○	○	Groove A (E) : 0～14 Groove B (D) : 57～69 Groove C : 58～68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 55～72 Groove C : 56～71	×	○	○	Groove A (E) : 0～14 Groove B (D) : 55～74 Groove C : 57～72	×	○	○	Groove A (E) : 0～17 Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81	×	○	○	Groove A (E) : 0～14 Groove B (D) : 62～74 Groove C : 63～73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 60～77 Groove C : 61～76	×	○	○	Groove A (E) : 0～14 Groove B (D) : 60～79 Groove C : 62～77	×	○	○	Groove A (E) : 0～17 Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86	×	○	○	Groove A (E) : 0～14 Groove B (D) : 67～79 Groove C : 68～78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 65～82 Groove C : 66～81	×	○	○	Groove A (E) : 0～14 Groove B (D) : 65～84 Groove C : 67～82	×	○	○	Groove A (E) : 0～17 Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91	×	○	○	Groove A (E) : 0～14 Groove B (D) : 72～84 Groove C : 73～83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 70～87 Groove C : 71～86	×	○	○	Groove A (E) : 0～14 Groove B (D) : 70～89 Groove C : 72～87	×	○	○	Groove A (E) : 0～17 Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96	×	○	○	Groove A (E) : 0～14 Groove B (D) : 77～89 Groove C : 78～88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 75～92 Groove C : 76～91	×	○	○	Groove A (E) : 0～14 Groove B (D) : 75～94 Groove C : 77～92	×	○	○	Groove A (E) : 0～17 Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101	×	○	○	Groove A (E) : 0～14 Groove B (D) : 82～94 Groove C : 83～93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 80～99 Groove C : 82～97	×	○	○	Groove A (E) : 0～17 Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106	×	○	○	Groove A (E) : 0～14 Groove B (D) : 87～99 Groove C : 88～98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 85～104 Groove C : 87～102	×	○	○	Groove A (E) : 0～17 Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111	×	○	○	Groove A (E) : 0～14 Groove B (D) : 92～104 Groove C : 93～103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 90～109 Groove C : 92～107	×	○	○	Groove A (E) : 0～17 Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116	×	○	○	Groove A (E) : 0～14 Groove B (D) : 97～109 Groove C : 98～108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 95～114 Groove C : 97～112	×	○	○	Groove A (E) : 0～17 Groove B (D) : 104～124 Groove C : 106～122	○	○	○	Groove A (E) : — Groove B (D), C : 106～121	×	○	○	Groove A (E) : 0～14 Groove B (D) : 102～114 Groove C : 103～113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 100～119 Groove C : 102～117	×	○	○	Groove A (E) : 0～17 Groove B (D) : 109～129 Groove C : 111～127	○	○	○	Groove A (E) : — Groove B (D), C : 111～126	×	○	○	Groove A (E) : 0～14 Groove B (D) : 107～119 Groove C : 108～118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 105～124 Groove C : 107～122	×	○	○	Groove A (E) : 0～17 Groove B (D) : 114～134 Groove C : 116～132	○	○	○	Groove A (E) : — Groove B (D), C : 116～131	×	○	○	Groove A (E) : 0～14 Groove B (D) : 112～124 Groove C : 113～123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting long bushing type (TBDAM)

■In the case of using 2 center mounting holes on the body

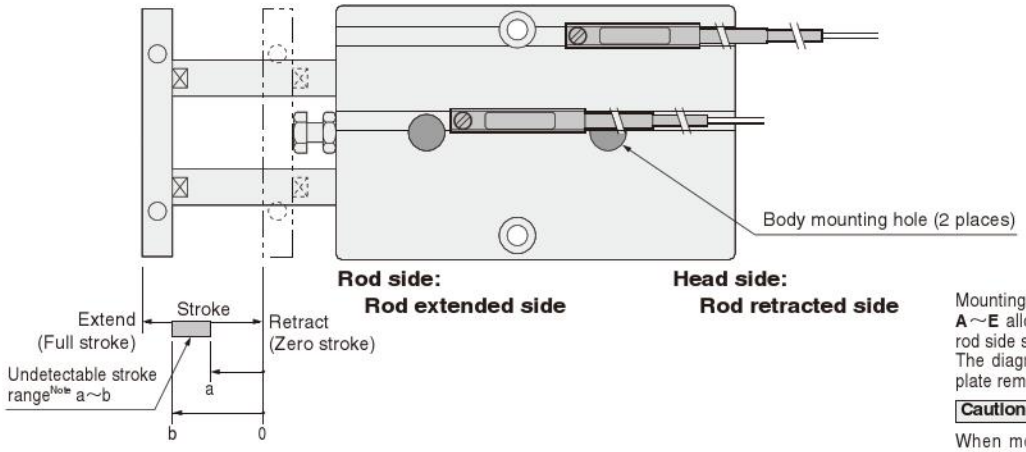

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

●Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.
This procedure is not necessary for ϕ 25 [0.984in.] and ϕ 32 [1.260in.], however, where no interference occurs.

●Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ 10				ϕ 16				ϕ 20				ϕ 25				ϕ 32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	○	Groove A (E) : 0~10 Groove B (D), C : —	×	○	○	Groove A (E) : 0~10 Groove B (D), C : —	○	○	○	Groove A (E) : 2~10 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~10 Groove B (D), C : —
	Rod side	×	△	○		×	○	○		×	○	○		○	○	○		×	○	○	
20	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
60	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D), C : —	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0~14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

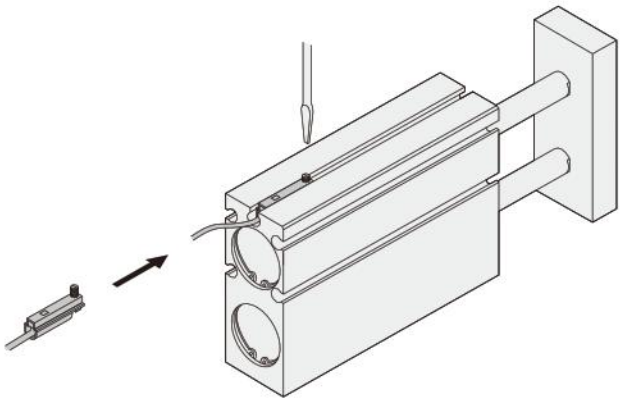

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0～10 Groove B (D), C : —	×	△	△	Groove A (E) : 0～10 Groove B (D), C : —	×	△	△	Groove A (E) : 0～10 Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0～10 Groove B (D), C : —
	Rod side	×	△	△		×	△	△		×	△	△		△	△	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
60	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting long bushing type (TBDAM)

■ In the case of using 2 mounting holes on the body (one on each side)

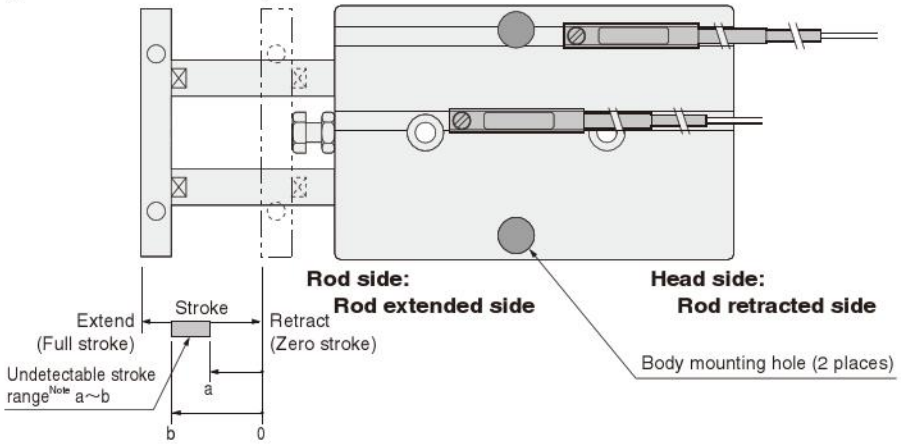

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	△	○	Groove A (E) : — Groove B (D) : 7~10 Groove C : 8~10	○	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	○	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —
	Rod side	○	△	○		○	△	△		△	×	△		○	△	△		○	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 18~20	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 21~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 22~30 Groove C : 24~30	○	○	△	Groove A (E) : — Groove B (D) : 28~30 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 28~40	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : — Groove B (D) : 36~40 Groove C : 38~40	○	○	○	Groove A (E) : — Groove B (D), C : 37~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 32~45 Groove C : 33~44	○	○	○	Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : — Groove B (D) : 41~50 Groove C : 43~50	○	○	○	Groove A (E) : — Groove B (D), C : 42~50	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37~50 Groove C : 38~49	○	○	○	Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : — Groove B (D) : 46~60 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	×	×		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42~55 Groove C : 43~54	○	○	○	Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47~60 Groove C : 48~59	○	○	○	Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52~65 Groove C : 53~64	○	○	○	Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57~70 Groove C : 58~69	○	○	○	Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62~75 Groove C : 63~74	○	○	○	Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67~80 Groove C : 68~79	○	○	○	Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72~85 Groove C : 73~84	○	○	○	Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77~90 Groove C : 78~89	○	○	○	Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : — Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : — Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : — Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : — Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : — Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : — Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : — Groove B (D) : 116~132 Groove C : 118~130	○	○	○	Groove A (E) : — Groove B (D), C : 117~129	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

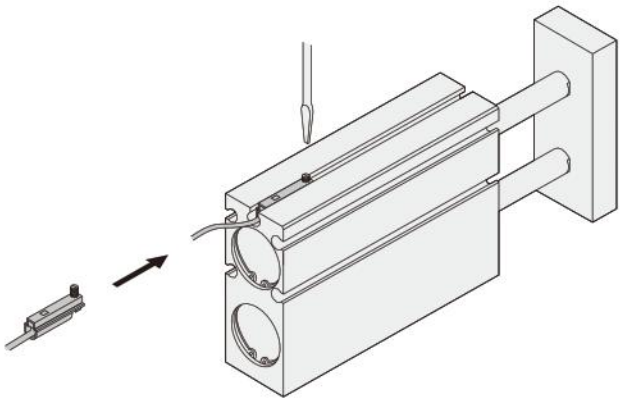

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fuly detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	△	△	Groove A (E) : — Groove B (D) : 5～10 Groove C : 6～10	△	×	△	Groove A (E) : — Groove B (D) : 8～10 Groove C : —	△	○	○	Groove A (E) : — Groove B (D) : 8～10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D) : 9～10 Groove C : —
	Rod side	△	△	△		△	×	△		△	×	×		△	×	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 16～20	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 17～20	○	○	△	Groove A (E) : — Groove B (D) : 18～20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D) : 19～20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 19～30 Groove C : 20～30	○	○	○	Groove A (E) : — Groove B (D) : 20～30 Groove C : 22～30	○	○	△	Groove A (E) : — Groove B (D) : 28～30 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D) : 27～30 Groove C : 28～30
	Rod side	○	×	×		○	×	×		○	×	△		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25～40 Groove C : 26～40	○	○	○	Groove A (E) : — Groove B (D) : 25～40 Groove C : 27～40	○	○	○	Groove A (E) : — Groove B (D) : 34～40 Groove C : 36～40	○	○	○	Groove A (E) : — Groove B (D), C : 36～40	○	○	○	Groove A (E) : — Groove B (D) : 32～40 Groove C : 33～40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30～47 Groove C : 31～46	○	○	○	Groove A (E) : — Groove B (D) : 30～49 Groove C : 32～47	○	○	○	Groove A (E) : — Groove B (D) : 39～50 Groove C : 41～50	○	○	○	Groove A (E) : — Groove B (D), C : 41～50	○	○	○	Groove A (E) : — Groove B (D) : 37～49 Groove C : 38～48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35～52 Groove C : 36～51	○	○	○	Groove A (E) : — Groove B (D) : 35～54 Groove C : 37～52	○	○	○	Groove A (E) : — Groove B (D) : 44～60 Groove C : 46～60	○	○	○	Groove A (E) : — Groove B (D), C : 46～60	○	○	○	Groove A (E) : — Groove B (D) : 42～54 Groove C : 43～53
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40～57 Groove C : 41～56	○	○	○	Groove A (E) : — Groove B (D) : 40～59 Groove C : 42～57	○	○	○	Groove A (E) : — Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66	○	○	○	Groove A (E) : — Groove B (D) : 47～59 Groove C : 48～58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45～62 Groove C : 46～61	○	○	○	Groove A (E) : — Groove B (D) : 45～64 Groove C : 47～62	○	○	○	Groove A (E) : — Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71	○	○	○	Groove A (E) : — Groove B (D) : 52～64 Groove C : 53～63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50～67 Groove C : 51～66	○	○	○	Groove A (E) : — Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : — Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76	○	○	○	Groove A (E) : — Groove B (D) : 57～69 Groove C : 58～68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55～72 Groove C : 56～71	○	○	○	Groove A (E) : — Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : — Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81	○	○	○	Groove A (E) : — Groove B (D) : 62～74 Groove C : 63～73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60～77 Groove C : 61～76	○	○	○	Groove A (E) : — Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : — Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86	○	○	○	Groove A (E) : — Groove B (D) : 67～79 Groove C : 68～78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65～82 Groove C : 66～81	○	○	○	Groove A (E) : — Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : — Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91	○	○	○	Groove A (E) : — Groove B (D) : 72～84 Groove C : 73～83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70～87 Groove C : 71～86	○	○	○	Groove A (E) : — Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : — Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96	○	○	○	Groove A (E) : — Groove B (D) : 77～89 Groove C : 78～88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75～92 Groove C : 76～91	○	○	○	Groove A (E) : — Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : — Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101	○	○	○	Groove A (E) : — Groove B (D) : 82～94 Groove C : 83～93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					○	○	○	Groove A (E) : — Groove B (D) : 80～99 Groove C : 82～97	○	○	○	Groove A (E) : — Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106	○	○	○	Groove A (E) : — Groove B (D) : 87～99 Groove C : 88～98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					○	○	○	Groove A (E) : — Groove B (D) : 85～104 Groove C : 87～102	○	○	○	Groove A (E) : — Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111	○	○	○	Groove A (E) : — Groove B (D) : 92～104 Groove C : 93～103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					○	○	○	Groove A (E) : — Groove B (D) : 90～109 Groove C : 92～107	○	○	○	Groove A (E) : — Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116	○	○	○	Groove A (E) : — Groove B (D) : 97～109 Groove C : 98～108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					○	○	○	Groove A (E) : — Groove B (D) : 95～114 Groove C : 97～112	○	○	○	Groove A (E) : — Groove B (D) : 104～124 Groove C : 106～122	○	○	○	Groove A (E) : — Groove B (D), C : 106～121	○	○	○	Groove A (E) : — Groove B (D) : 102～114 Groove C : 103～113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					○	○	○	Groove A (E) : — Groove B (D) : 100～119 Groove C : 102～117	○	○	○	Groove A (E) : — Groove B (D) : 109～129 Groove C : 111～127	○	○	○	Groove A (E) : — Groove B (D), C : 111～126	○	○	○	Groove A (E) : — Groove B (D) : 107～119 Groove C : 108～118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					○	○	○	Groove A (E) : — Groove B (D) : 105～124 Groove C : 107～122	○	○	○	Groove A (E) : — Groove B (D) : 114～134 Groove C : 116～132	○	○	○	Groove A (E) : — Groove B (D), C : 116～131	○	○	○	Groove A (E) : — Groove B (D) : 112～124 Groove C : 113～123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting long bushing type (TBDAM)

■ In the case of using 3 head side mounting holes on the body

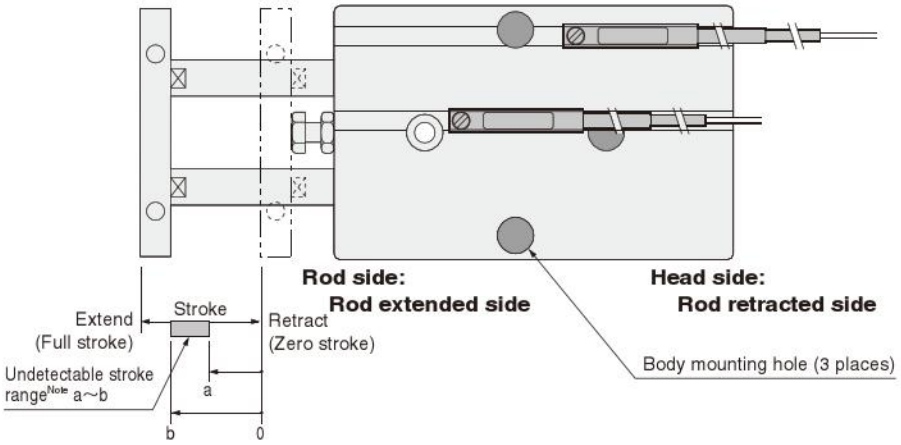

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	○	Groove A (E) : 0～10 Groove B (D) : 7～10 Groove C : 8～10	×	△	△	Groove A (E) : 0～10 Groove B (D) : 8～10 Groove C : —	○	○	△	Groove A (E) : 2～10 Groove B (D) : 8～10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0～10 Groove B (D) : 9～10 Groove C : —
	Rod side	×	△	○		×	△	△		×	×	△		○	△	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 17～20 Groove C : 18～20	×	○	○	Groove A (E) : 0～12 Groove B (D) : 17～20 Groove C : 19～20	○	○	△	Groove A (E) : 2～15 Groove B (D) : 18～20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0～14 Groove B (D) : 19～20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 21～30 Groove C : 22～30	×	○	○	Groove A (E) : 0～12 Groove B (D) : 22～30 Groove C : 24～30	○	○	○	Groove A (E) : 2～15 Groove B (D) : 26～30 Groove C : 28～30	○	○	○	Groove A (E) : — Groove B (D), C : 27～30	×	○	○	Groove A (E) : 0～14 Groove B (D) : 27～30 Groove C : 28～30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 27～40 Groove C : 28～40	×	○	○	Groove A (E) : 0～12 Groove B (D) : 27～40 Groove C : 29～40	○	○	○	Groove A (E) : 2～15 Groove B (D) : 31～40 Groove C : 33～40	○	○	○	Groove A (E) : — Groove B (D), C : 32～40	×	○	○	Groove A (E) : 0～14 Groove B (D) : 32～40 Groove C : 33～40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 32～45 Groove C : 33～44	×	○	○	Groove A (E) : 0～12 Groove B (D) : 32～46 Groove C : 34～44	○	○	○	Groove A (E) : 2～15 Groove B (D) : 36～50 Groove C : 39～50	○	○	○	Groove A (E) : — Groove B (D), C : 37～49	×	○	○	Groove A (E) : 0～14 Groove B (D) : 37～49 Groove C : 38～48
	Rod side	○	○	○		○	○	○		○	×	×		○	○	○		○	×	○	
60	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 37～50 Groove C : 38～49	×	○	○	Groove A (E) : 0～12 Groove B (D) : 37～51 Groove C : 39～49	○	○	○	Groove A (E) : 2～15 Groove B (D) : 41～57 Groove C : 43～55	○	○	○	Groove A (E) : — Groove B (D), C : 42～54	×	○	○	Groove A (E) : 0～14 Groove B (D) : 42～54 Groove C : 43～53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 42～55 Groove C : 43～54	×	○	○	Groove A (E) : 0～12 Groove B (D) : 42～56 Groove C : 44～54	○	○	○	Groove A (E) : 2～15 Groove B (D) : 46～62 Groove C : 48～60	○	○	○	Groove A (E) : — Groove B (D), C : 47～59	×	○	○	Groove A (E) : 0～14 Groove B (D) : 47～59 Groove C : 48～58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 47～60 Groove C : 48～59	×	○	○	Groove A (E) : 0～12 Groove B (D) : 47～61 Groove C : 49～59	○	○	○	Groove A (E) : 2～15 Groove B (D) : 51～67 Groove C : 53～65	○	○	○	Groove A (E) : — Groove B (D), C : 52～64	×	○	○	Groove A (E) : 0～14 Groove B (D) : 52～64 Groove C : 53～63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 52～65 Groove C : 53～64	×	○	○	Groove A (E) : 0～12 Groove B (D) : 52～66 Groove C : 54～64	○	○	○	Groove A (E) : 2～15 Groove B (D) : 56～72 Groove C : 58～70	○	○	○	Groove A (E) : — Groove B (D), C : 57～69	×	○	○	Groove A (E) : 0～14 Groove B (D) : 57～69 Groove C : 58～68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 57～70 Groove C : 58～69	×	○	○	Groove A (E) : 0～12 Groove B (D) : 57～71 Groove C : 59～69	○	○	○	Groove A (E) : 2～15 Groove B (D) : 61～77 Groove C : 63～75	○	○	○	Groove A (E) : — Groove B (D), C : 62～74	×	○	○	Groove A (E) : 0～14 Groove B (D) : 62～74 Groove C : 63～73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 62～75 Groove C : 63～74	×	○	○	Groove A (E) : 0～12 Groove B (D) : 62～76 Groove C : 64～74	○	○	○	Groove A (E) : 2～15 Groove B (D) : 66～82 Groove C : 68～80	○	○	○	Groove A (E) : — Groove B (D), C : 67～79	×	○	○	Groove A (E) : 0～14 Groove B (D) : 67～79 Groove C : 68～78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 67～80 Groove C : 68～79	×	○	○	Groove A (E) : 0～12 Groove B (D) : 67～81 Groove C : 69～79	○	○	○	Groove A (E) : 2～15 Groove B (D) : 71～87 Groove C : 73～85	○	○	○	Groove A (E) : — Groove B (D), C : 72～84	×	○	○	Groove A (E) : 0～14 Groove B (D) : 72～84 Groove C : 73～83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 72～85 Groove C : 73～84	×	○	○	Groove A (E) : 0～12 Groove B (D) : 72～86 Groove C : 74～84	○	○	○	Groove A (E) : 2～15 Groove B (D) : 76～92 Groove C : 78～90	○	○	○	Groove A (E) : — Groove B (D), C : 77～89	×	○	○	Groove A (E) : 0～14 Groove B (D) : 77～89 Groove C : 78～88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～11 Groove B (D) : 77～90 Groove C : 78～89	×	○	○	Groove A (E) : 0～12 Groove B (D) : 77～91 Groove C : 79～89	○	○	○	Groove A (E) : 2～15 Groove B (D) : 81～97 Groove C : 83～95	○	○	○	Groove A (E) : — Groove B (D), C : 82～94	×	○	○	Groove A (E) : 0～14 Groove B (D) : 82～94 Groove C : 83～93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0～12 Groove B (D) : 82～96 Groove C : 84～94	○	○	○	Groove A (E) : 2～15 Groove B (D) : 86～102 Groove C : 88～100	○	○	○	Groove A (E) : — Groove B (D), C : 87～99	×	○	○	Groove A (E) : 0～14 Groove B (D) : 87～99 Groove C : 88～98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0～12 Groove B (D) : 87～101 Groove C : 89～99	○	○	○	Groove A (E) : 2～15 Groove B (D) : 91～107 Groove C : 93～105	○	○	○	Groove A (E) : — Groove B (D), C : 92～104	×	○	○	Groove A (E) : 0～14 Groove B (D) : 92～104 Groove C : 93～103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0～12 Groove B (D) : 92～106 Groove C : 94～104	○	○	○	Groove A (E) : 2～15 Groove B (D) : 96～112 Groove C : 98～110	○	○	○	Groove A (E) : — Groove B (D), C : 97～109	×	○	○	Groove A (E) : 0～14 Groove B (D) : 97～109 Groove C : 98～108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0～12 Groove B (D) : 97～111 Groove C : 99～109	○	○	○	Groove A (E) : 2～15 Groove B (D) : 101～117 Groove C : 103～115	○	○	○	Groove A (E) : — Groove B (D), C : 102～114	×	○	○	Groove A (E) : 0～14 Groove B (D) : 102～114 Groove C : 103～113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0～12 Groove B (D) : 102～116 Groove C : 104～114	○	○	○	Groove A (E) : 2～15 Groove B (D) : 106～122 Groove C : 108～120	○	○	○	Groove A (E) : — Groove B (D), C : 107～119	×	○	○	Groove A (E) : 0～14 Groove B (D) : 107～119 Groove C : 108～118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0～12 Groove B (D) : 107～121 Groove C : 109～119	○	○	○	Groove A (E) : 2～15 Groove B (D) : 111～127 Groove C : 113～125	○	○	○	Groove A (E) : — Groove B (D), C : 112～124	×	○	○	Groove A (E) : 0～14 Groove B (D) : 112～124 Groove C : 113～123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

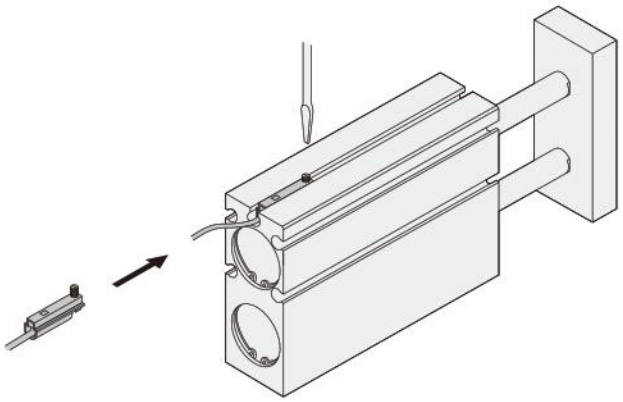

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0～10 Groove B (D) : 5～10 Groove C : 6～10	×	×	△	Groove A (E) : 0～10 Groove B (D) : 8～10 Groove C : —	×	○	○	Groove A (E) : 0～10 Groove B (D) : 8～10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0～10 Groove B (D) : 9～10 Groove C : —
	Rod side	×	△	△		×	×	△		×	×	×		△	×	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 15～20 Groove C : 16～20	×	○	○	Groove A (E) : 0～14 Groove B (D) : 15～20 Groove C : 17～20	×	○	△	Groove A (E) : 0～17 Groove B (D) : 18～20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0～14 Groove B (D) : 19～20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 19～30 Groove C : 20～30	×	○	○	Groove A (E) : 0～14 Groove B (D) : 20～30 Groove C : 22～30	×	○	○	Groove A (E) : 0～17 Groove B (D) : 24～30 Groove C : 26～30	○	○	○	Groove A (E) : — Groove B (D), C : 26～30	×	○	○	Groove A (E) : 0～14 Groove B (D) : 27～30 Groove C : 28～30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 25～40 Groove C : 26～40	×	○	○	Groove A (E) : 0～14 Groove B (D) : 25～40 Groove C : 27～40	×	○	○	Groove A (E) : 0～17 Groove B (D) : 29～40 Groove C : 31～40	○	○	○	Groove A (E) : — Groove B (D), C : 31～40	×	○	○	Groove A (E) : 0～14 Groove B (D) : 32～40 Groove C : 33～40
	Rod side	○	×	×		○	○	○		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 30～47 Groove C : 31～46	×	○	○	Groove A (E) : 0～14 Groove B (D) : 30～49 Groove C : 32～47	×	○	○	Groove A (E) : 0～17 Groove B (D) : 34～50 Groove C : 36～50	○	○	○	Groove A (E) : — Groove B (D), C : 36～50	×	○	○	Groove A (E) : 0～14 Groove B (D) : 37～49 Groove C : 38～48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 35～52 Groove C : 36～51	×	○	○	Groove A (E) : 0～14 Groove B (D) : 35～54 Groove C : 37～52	×	○	○	Groove A (E) : 0～17 Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56	×	○	○	Groove A (E) : 0～14 Groove B (D) : 42～54 Groove C : 43～53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 40～57 Groove C : 41～56	×	○	○	Groove A (E) : 0～14 Groove B (D) : 40～59 Groove C : 42～57	×	○	○	Groove A (E) : 0～17 Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61	×	○	○	Groove A (E) : 0～14 Groove B (D) : 47～59 Groove C : 48～58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 45～62 Groove C : 46～61	×	○	○	Groove A (E) : 0～12 Groove B (D) : 45～64 Groove C : 47～62	×	○	○	Groove A (E) : 0～17 Groove B (D) : 49～69 Groove C : 51～62	○	○	○	Groove A (E) : — Groove B (D), C : 51～66	×	○	○	Groove A (E) : 0～14 Groove B (D) : 52～64 Groove C : 53～63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 50～67 Groove C : 51～66	×	○	○	Groove A (E) : 0～14 Groove B (D) : 50～69 Groove C : 52～67	×	○	○	Groove A (E) : 0～17 Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71	×	○	○	Groove A (E) : 0～14 Groove B (D) : 57～69 Groove C : 58～68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 55～72 Groove C : 56～71	×	○	○	Groove A (E) : 0～14 Groove B (D) : 55～74 Groove C : 57～72	×	○	○	Groove A (E) : 0～17 Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76	×	○	○	Groove A (E) : 0～14 Groove B (D) : 62～74 Groove C : 63～73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 60～77 Groove C : 61～76	×	○	○	Groove A (E) : 0～14 Groove B (D) : 60～79 Groove C : 62～77	×	○	○	Groove A (E) : 0～17 Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81	×	○	○	Groove A (E) : 0～14 Groove B (D) : 67～79 Groove C : 68～78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 65～82 Groove C : 66～81	×	○	○	Groove A (E) : 0～14 Groove B (D) : 65～84 Groove C : 67～82	×	○	○	Groove A (E) : 0～17 Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86	×	○	○	Groove A (E) : 0～14 Groove B (D) : 72～84 Groove C : 73～83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 70～87 Groove C : 71～86	×	○	○	Groove A (E) : 0～14 Groove B (D) : 70～89 Groove C : 72～87	×	○	○	Groove A (E) : 0～17 Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91	×	○	○	Groove A (E) : 0～14 Groove B (D) : 77～89 Groove C : 78～88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～13 Groove B (D) : 75～92 Groove C : 76～91	×	○	○	Groove A (E) : 0～14 Groove B (D) : 75～94 Groove C : 77～92	×	○	○	Groove A (E) : 0～17 Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96	×	○	○	Groove A (E) : 0～14 Groove B (D) : 82～94 Groove C : 83～93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 80～99 Groove C : 82～97	×	○	○	Groove A (E) : 0～17 Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101	×	○	○	Groove A (E) : 0～14 Groove B (D) : 87～99 Groove C : 88～98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 85～104 Groove C : 87～102	×	○	○	Groove A (E) : 0～17 Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106	×	○	○	Groove A (E) : 0～14 Groove B (D) : 92～104 Groove C : 93～103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 90～109 Groove C : 92～107	×	○	○	Groove A (E) : 2～25 Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111	×	○	○	Groove A (E) : 0～14 Groove B (D) : 97～109 Groove C : 98～108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 95～114 Groove C : 97～112	×	○	○	Groove A (E) : 0～17 Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116	×	○	○	Groove A (E) : 0～14 Groove B (D) : 102～114 Groove C : 103～113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 100～119 Groove C : 102～117	×	○	○	Groove A (E) : 0～17 Groove B (D) : 104～124 Groove C : 106～122	○	○	○	Groove A (E) : — Groove B (D), C : 106～121	×	○	○	Groove A (E) : 0～14 Groove B (D) : 107～119 Groove C : 108～118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0～14 Groove B (D) : 105～124 Groove C : 107～122	×	○	○	Groove A (E) : 0～17 Groove B (D) : 109～129 Groove C : 111～127	○	○	○	Groove A (E) : — Groove B (D), C : 111～126	×	○	○	Groove A (E) : 0～14 Groove B (D) : 112～124 Groove C : 113～123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting long bushing type (TBDAM)

■ In the case of using 3 rod side mounting holes on the body

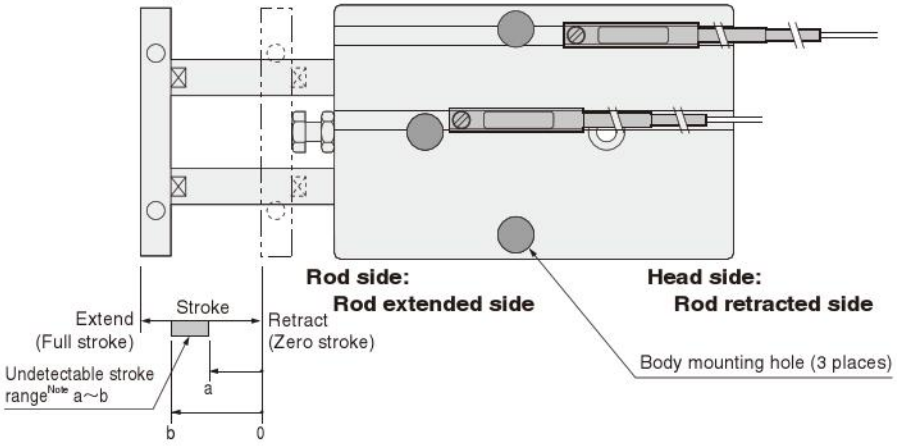

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke	Mounting groove	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	△	○	Groove A (E) : — Groove B (D) : 7~10 Groove C : 8~10	○	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	○	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —
	Rod side	○	△	○		○	△	△		△	×	△		○	△	△		○	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 18~20	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 21~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : — Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D), C : 27~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 28~40	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : — Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D), C : 32~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 32~45 Groove C : 33~44	○	○	○	Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : — Groove B (D) : 36~50 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	○	○		○	×	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37~50 Groove C : 38~49	○	○	○	Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : — Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42~55 Groove C : 43~54	○	○	○	Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : — Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47~60 Groove C : 48~59	○	○	○	Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52~65 Groove C : 53~64	○	○	○	Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57~70 Groove C : 58~69	○	○	○	Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62~75 Groove C : 63~74	○	○	○	Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67~80 Groove C : 68~79	○	○	○	Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72~85 Groove C : 73~84	○	○	○	Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77~90 Groove C : 78~89	○	○	○	Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : — Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : — Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : — Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : — Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : — Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : — Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

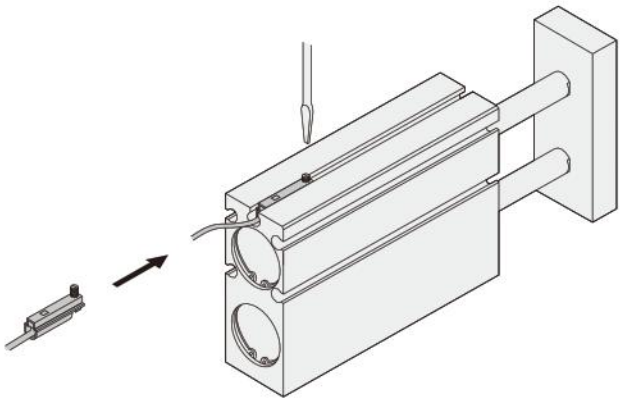

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ10				φ16				φ20				φ25				φ32			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	△	△	Groove A (E) : — Groove B (D) : 5～10 Groove C : 6～10	△	×	△	Groove A (E) : — Groove B (D) : 8～10 Groove C : —	△	○	○	Groove A (E) : — Groove B (D) : 8～10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D) : 9～10 Groove C : —
	Rod side	△	△	△		△	×	△		△	×	×		△	×	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 16～20	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 17～20	○	○	△	Groove A (E) : — Groove B (D) : 18～20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D) : 19～20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 19～30 Groove C : 20～30	○	○	○	Groove A (E) : — Groove B (D) : 20～30 Groove C : 22～30	○	○	○	Groove A (E) : — Groove B (D) : 24～30 Groove C : 26～30	○	○	○	Groove A (E) : — Groove B (D), C : 26～30	○	○	○	Groove A (E) : — Groove B (D) : 27～30 Groove C : 28～30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25～40 Groove C : 26～40	○	○	○	Groove A (E) : — Groove B (D) : 25～40 Groove C : 27～40	○	○	○	Groove A (E) : — Groove B (D) : 29～40 Groove C : 31～40	○	○	○	Groove A (E) : — Groove B (D), C : 31～40	○	○	○	Groove A (E) : — Groove B (D) : 32～40 Groove C : 33～40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30～47 Groove C : 31～46	○	○	○	Groove A (E) : — Groove B (D) : 30～49 Groove C : 32～47	○	○	○	Groove A (E) : — Groove B (D) : 34～50 Groove C : 36～50	○	○	○	Groove A (E) : — Groove B (D), C : 36～50	○	○	○	Groove A (E) : — Groove B (D) : 37～49 Groove C : 38～48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35～52 Groove C : 36～51	○	○	○	Groove A (E) : — Groove B (D) : 35～54 Groove C : 37～52	○	○	○	Groove A (E) : — Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56	○	○	○	Groove A (E) : — Groove B (D) : 42～54 Groove C : 43～53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40～57 Groove C : 41～56	○	○	○	Groove A (E) : — Groove B (D) : 40～59 Groove C : 42～57	○	○	○	Groove A (E) : — Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61	○	○	○	Groove A (E) : — Groove B (D) : 47～59 Groove C : 48～58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45～62 Groove C : 46～61	○	○	○	Groove A (E) : — Groove B (D) : 45～64 Groove C : 47～62	○	○	○	Groove A (E) : — Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66	○	○	○	Groove A (E) : — Groove B (D) : 52～64 Groove C : 53～63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50～67 Groove C : 51～66	○	○	○	Groove A (E) : — Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : — Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71	○	○	○	Groove A (E) : — Groove B (D) : 57～69 Groove C : 58～68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55～72 Groove C : 56～71	○	○	○	Groove A (E) : — Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : — Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76	○	○	○	Groove A (E) : — Groove B (D) : 62～74 Groove C : 63～73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60～77 Groove C : 61～76	○	○	○	Groove A (E) : — Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : — Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81	○	○	○	Groove A (E) : — Groove B (D) : 67～79 Groove C : 68～78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65～82 Groove C : 66～81	○	○	○	Groove A (E) : — Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : — Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86	○	○	○	Groove A (E) : — Groove B (D) : 72～84 Groove C : 73～83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70～87 Groove C : 71～86	○	○	○	Groove A (E) : — Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : — Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91	○	○	○	Groove A (E) : — Groove B (D) : 77～89 Groove C : 78～88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75～92 Groove C : 76～91	○	○	○	Groove A (E) : — Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : — Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96	○	○	○	Groove A (E) : — Groove B (D) : 82～94 Groove C : 83～93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					○	○	○	Groove A (E) : — Groove B (D) : 80～99 Groove C : 82～97	○	○	○	Groove A (E) : — Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101	○	○	○	Groove A (E) : — Groove B (D) : 87～99 Groove C : 88～98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					○	○	○	Groove A (E) : — Groove B (D) : 85～104 Groove C : 87～102	○	○	○	Groove A (E) : — Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106	○	○	○	Groove A (E) : — Groove B (D) : 92～104 Groove C : 93～103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					○	○	○	Groove A (E) : — Groove B (D) : 90～109 Groove C : 92～107	○	○	○	Groove A (E) : — Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111	○	○	○	Groove A (E) : — Groove B (D) : 97～109 Groove C : 98～108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					○	○	○	Groove A (E) : — Groove B (D) : 95～114 Groove C : 97～112	○	○	○	Groove A (E) : — Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116	○	○	○	Groove A (E) : — Groove B (D) : 102～114 Groove C : 103～113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					○	○	○	Groove A (E) : — Groove B (D) : 100～119 Groove C : 102～117	○	○	○	Groove A (E) : — Groove B (D) : 104～124 Groove C : 106～122	○	○	○	Groove A (E) : — Groove B (D), C : 106～121	○	○	○	Groove A (E) : — Groove B (D) : 107～119 Groove C : 108～118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					○	○	○	Groove A (E) : — Groove B (D) : 105～124 Groove C : 107～122	○	○	○	Groove A (E) : — Groove B (D) : 109～129 Groove C : 111～127	○	○	○	Groove A (E) : — Groove B (D), C : 111～126	○	○	○	Groove A (E) : — Groove B (D) : 112～124 Groove C : 113～123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Head side end keep cylinder (TBDAK-HL)

■In the case of using 4 mounting holes on the body

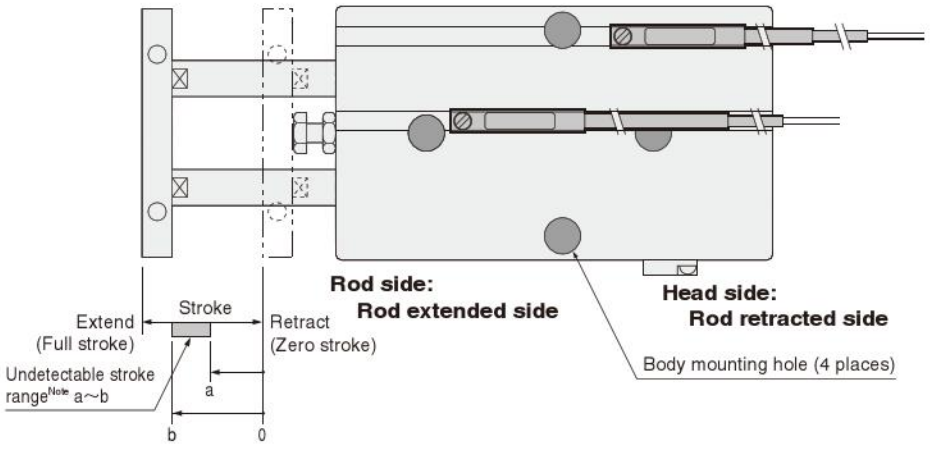

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

●Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions.
The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.
This procedure is not necessary for ϕ25 [0.984in.], however, where no interference occurs.

●Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke / Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	○	○	Groove A (E) : 0～10 Groove B (D) : 2～10 Groove C : 4～10	△	○	○	Groove A (E) : 2～10 Groove B (D) : 6～10 Groove C : 8～10	○	○	○	Groove A (E) : — Groove B (D), C : 7～10
	Rod side	△	×	×		△	×	×		○	×	×	
20	Head side	△	○	○	Groove A (E) : 0～12 Groove B (D) : 7～20 Groove C : 9～20	△	○	○	Groove A (E) : 2～15 Groove B (D) : 11～20 Groove C : 13～20	○	○	○	Groove A (E) : — Groove B (D), C : 12～20
	Rod side	△	×	×		△	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 12～26 Groove C : 14～24	○	○	○	Groove A (E) : 2～15 Groove B (D) : 16～30 Groove C : 18～30	○	○	○	Groove A (E) : — Groove B (D), C : 17～29
	Rod side	○	○	○		○	×	×		○	○	○	
40	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 17～31 Groove C : 19～29	○	○	○	Groove A (E) : 2～15 Groove B (D) : 21～37 Groove C : 23～35	○	○	○	Groove A (E) : — Groove B (D), C : 22～34
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 22～36 Groove C : 24～34	○	○	○	Groove A (E) : 2～15 Groove B (D) : 26～42 Groove C : 28～40	○	○	○	Groove A (E) : — Groove B (D), C : 27～39
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 27～41 Groove C : 29～39	○	○	○	Groove A (E) : 2～15 Groove B (D) : 31～47 Groove C : 33～45	○	○	○	Groove A (E) : — Groove B (D), C : 32～44
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 32～46 Groove C : 34～44	○	○	○	Groove A (E) : 2～15 Groove B (D) : 36～52 Groove C : 38～50	○	○	○	Groove A (E) : — Groove B (D), C : 37～49
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 37～51 Groove C : 39～49	○	○	○	Groove A (E) : 2～15 Groove B (D) : 41～57 Groove C : 43～55	○	○	○	Groove A (E) : — Groove B (D), C : 42～54
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 42～56 Groove C : 44～54	○	○	○	Groove A (E) : 2～15 Groove B (D) : 46～62 Groove C : 48～60	○	○	○	Groove A (E) : — Groove B (D), C : 47～59
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 47～61 Groove C : 49～59	○	○	○	Groove A (E) : 2～15 Groove B (D) : 51～67 Groove C : 53～65	○	○	○	Groove A (E) : — Groove B (D), C : 52～64
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 52～66 Groove C : 54～64	○	○	○	Groove A (E) : 2～15 Groove B (D) : 56～72 Groove C : 58～70	○	○	○	Groove A (E) : — Groove B (D), C : 57～69
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 57～71 Groove C : 59～69	○	○	○	Groove A (E) : 2～15 Groove B (D) : 61～77 Groove C : 63～75	○	○	○	Groove A (E) : — Groove B (D), C : 62～74
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 62～76 Groove C : 64～74	○	○	○	Groove A (E) : 2～15 Groove B (D) : 66～82 Groove C : 68～80	○	○	○	Groove A (E) : — Groove B (D), C : 67～79
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 67～81 Groove C : 69～79	○	○	○	Groove A (E) : 2～15 Groove B (D) : 71～87 Groove C : 73～85	○	○	○	Groove A (E) : — Groove B (D), C : 72～84
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 72～86 Groove C : 74～84	○	○	○	Groove A (E) : 2～15 Groove B (D) : 76～92 Groove C : 78～90	○	○	○	Groove A (E) : — Groove B (D), C : 77～89
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 77～91 Groove C : 79～89	○	○	○	Groove A (E) : 2～15 Groove B (D) : 81～97 Groove C : 83～95	○	○	○	Groove A (E) : — Groove B (D), C : 82～94
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

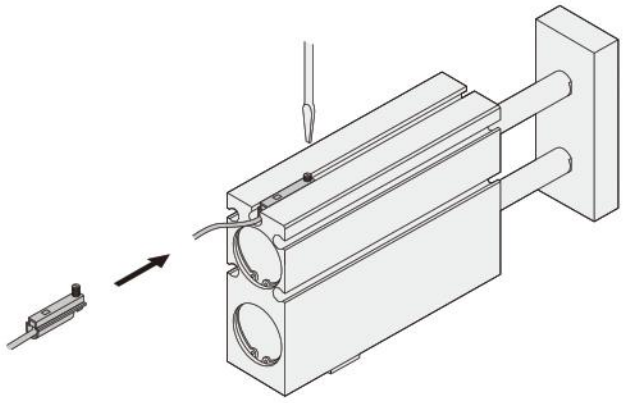

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	×	○	Groove A (E) : 0～10 Groove B (D) : 2～10 Groove C : —	△	○	○	Groove A (E) : 0～10 Groove B (D) : 4～10 Groove C : 6～10	△	○	○	Groove A (E) : — Groove B (D), C : 6～10
	Rod side	△	×	×		△	×	×		△	×	×	
20	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 5～20 Groove C : 7～20	○	○	○	Groove A (E) : 0～17 Groove B (D) : 9～20 Groove C : 11～20	○	○	○	Groove A (E) : — Groove B (D), C : 11～20
	Rod side	○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 10～29 Groove C : 12～27	○	○	○	Groove A (E) : 0～17 Groove B (D) : 14～30 Groove C : 16～30	○	○	○	Groove A (E) : — Groove B (D), C : 16～30
	Rod side	○	○	○		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 15～34 Groove C : 17～32	○	○	○	Groove A (E) : 0～17 Groove B (D) : 19～39 Groove C : 21～37	○	○	○	Groove A (E) : — Groove B (D), C : 21～36
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 20～39 Groove C : 22～37	○	○	○	Groove A (E) : 0～17 Groove B (D) : 24～44 Groove C : 26～42	○	○	○	Groove A (E) : — Groove B (D), C : 26～41
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 25～44 Groove C : 27～42	○	○	○	Groove A (E) : 0～17 Groove B (D) : 29～49 Groove C : 31～47	○	○	○	Groove A (E) : — Groove B (D), C : 31～46
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 30～49 Groove C : 32～47	○	○	○	Groove A (E) : 0～17 Groove B (D) : 34～54 Groove C : 36～52	○	○	○	Groove A (E) : — Groove B (D), C : 36～51
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 35～54 Groove C : 37～52	○	○	○	Groove A (E) : 0～17 Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 40～59 Groove C : 42～57	○	○	○	Groove A (E) : 0～17 Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 45～64 Groove C : 47～62	○	○	○	Groove A (E) : 0～17 Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : 0～17 Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : 0～17 Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : 0～17 Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : 0～17 Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : 0～17 Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : 0～17 Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Head side end keep cylinder (TBDAK-HL)

■ In the case of using 2 center mounting holes on the body

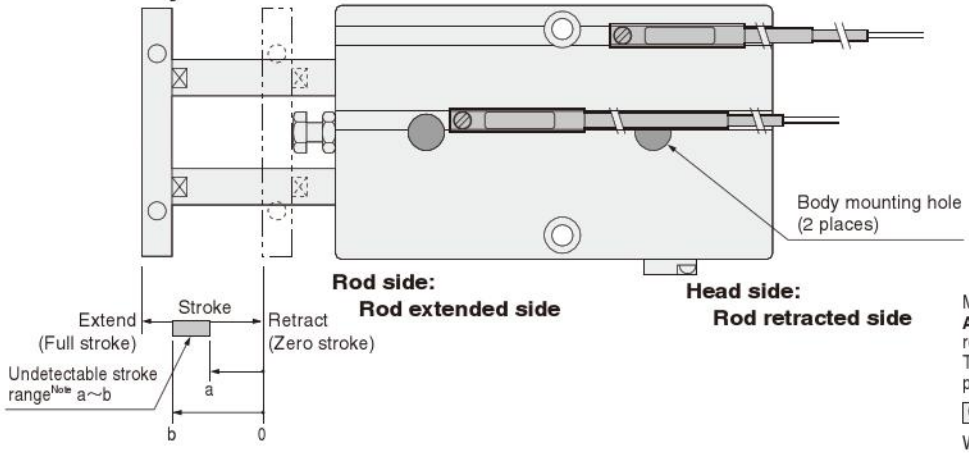

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**~**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.
This procedure is not necessary for ϕ25 [0.984in.], however, where no interference occurs.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	○	○	Groove A (E) : 0~10 Groove B (D), C : —	△	○	○	Groove A (E) : 2~10 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	△	○	○		△	○	○		○	○	○	
20	Head side	△	○	○	Groove A (E) : 0~12 Groove B (D), C : —	△	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	△	○	○		△	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

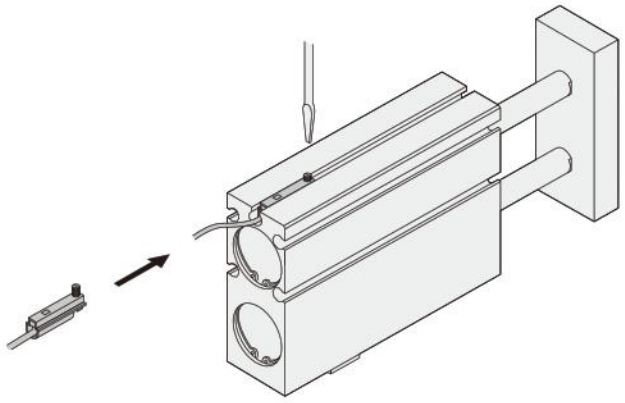

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	△	△	Groove A (E) : 0～10 Groove B (D), C : —	△	△	△	Groove A (E) : 0～10 Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	△	△	△		△	△	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D), C : —	○	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Head side end keep cylinder (TBDAK-HL)

■ In the case of using 2 mounting holes on the body (one on each side)

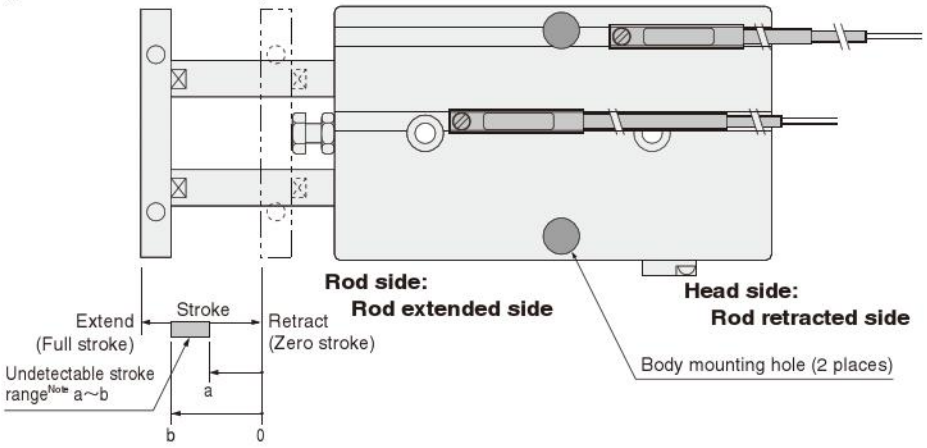

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16					φ20					φ25				
Stroke	Mounting groove	A E	B D	C	Undetectable stroke range of sensor switch		A E	B D	C	Undetectable stroke range of sensor switch		A E	B D	C	Undetectable stroke range of sensor switch	
10	Head side	○	○	○	Groove A (E) : — Groove B (D) : 2～10 Groove C : 4～10		△	○	○	Groove A (E) : — Groove B (D) : 6～10 Groove C : 8～10		○	○	○	Groove A (E) : — Groove B (D), C : 7～10	
	Rod side	○	×	×			△	×	×			○	×	×		
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 7～20 Groove C : 9～20		○	○	○	Groove A (E) : — Groove B (D) : 11～20 Groove C : 13～20		○	○	○	Groove A (E) : — Groove B (D), C : 12～20	
	Rod side	○	×	×			○	×	×			○	×	×		
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 12～26 Groove C : 14～24		○	○	○	Groove A (E) : — Groove B (D) : 16～30 Groove C : 18～30		○	○	○	Groove A (E) : — Groove B (D), C : 17～29	
	Rod side	○	○	○			○	×	×			○	○	○		
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 17～31 Groove C : 19～29		○	○	○	Groove A (E) : — Groove B (D) : 21～37 Groove C : 28～35		○	○	○	Groove A (E) : — Groove B (D), C : 22～34	
	Rod side	○	○	○			○	○	○			○	○	○		
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 22～36 Groove C : 24～34		○	○	○	Groove A (E) : — Groove B (D) : 26～42 Groove C : 28～40		○	○	○	Groove A (E) : — Groove B (D), C : 27～39	
	Rod side	○	○	○			○	○	○			○	○	○		
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 27～41 Groove C : 29～39		○	○	○	Groove A (E) : — Groove B (D) : 31～47 Groove C : 33～45		○	○	○	Groove A (E) : — Groove B (D), C : 32～44	
	Rod side	○	○	○			○	○	○			○	○	○		
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 32～46 Groove C : 34～44		○	○	○	Groove A (E) : — Groove B (D) : 36～52 Groove C : 38～50		○	○	○	Groove A (E) : — Groove B (D), C : 37～49	
	Rod side	○	○	○			○	○	○			○	○	○		
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37～51 Groove C : 39～49		○	○	○	Groove A (E) : — Groove B (D) : 41～57 Groove C : 43～55		○	○	○	Groove A (E) : — Groove B (D), C : 42～54	
	Rod side	○	○	○			○	○	○			○	○	○		
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42～56 Groove C : 44～54		○	○	○	Groove A (E) : — Groove B (D) : 46～62 Groove C : 48～60		○	○	○	Groove A (E) : — Groove B (D), C : 47～59	
	Rod side	○	○	○			○	○	○			○	○	○		
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47～61 Groove C : 49～59		○	○	○	Groove A (E) : — Groove B (D) : 51～67 Groove C : 53～65		○	○	○	Groove A (E) : — Groove B (D), C : 52～64	
	Rod side	○	○	○			○	○	○			○	○	○		
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52～66 Groove C : 54～64		○	○	○	Groove A (E) : — Groove B (D) : 56～72 Groove C : 58～70		○	○	○	Groove A (E) : — Groove B (D), C : 57～69	
	Rod side	○	○	○			○	○	○			○	○	○		
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57～71 Groove C : 59～69		○	○	○	Groove A (E) : — Groove B (D) : 61～77 Groove C : 63～75		○	○	○	Groove A (E) : — Groove B (D), C : 62～74	
	Rod side	○	○	○			○	○	○			○	○	○		
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62～76 Groove C : 64～74		○	○	○	Groove A (E) : — Groove B (D) : 66～82 Groove C : 68～80		○	○	○	Groove A (E) : — Groove B (D), C : 67～79	
	Rod side	○	○	○			○	○	○			○	○	○		
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67～81 Groove C : 69～79		○	○	○	Groove A (E) : — Groove B (D) : 71～87 Groove C : 73～85		○	○	○	Groove A (E) : — Groove B (D), C : 72～84	
	Rod side	○	○	○			○	○	○			○	○	○		
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72～86 Groove C : 74～84		○	○	○	Groove A (E) : — Groove B (D) : 76～92 Groove C : 78～90		○	○	○	Groove A (E) : — Groove B (D), C : 77～89	
	Rod side	○	○	○			○	○	○			○	○	○		
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77～91 Groove C : 79～89		○	○	○	Groove A (E) : — Groove B (D) : 81～97 Groove C : 83～95		○	○	○	Groove A (E) : — Groove B (D), C : 82～94	
	Rod side	○	○	○			○	○	○			○	○	○		

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

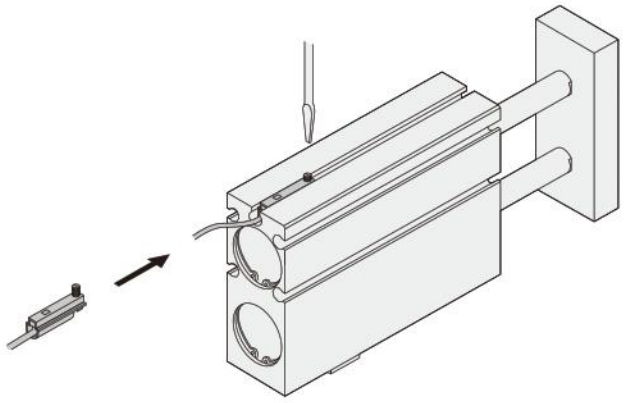

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	×	○	Groove A (E) : — Groove B (D) : 0～10 Groove C : 2～10	△	○	○	Groove A (E) : — Groove B (D) : 4～10 Groove C : 6～10	△	○	○	Groove A (E) : — Groove B (D), C : 6～10
	Rod side	△	×	×		△	×	×		△	×	×	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 5～20 Groove C : 7～20	○	○	○	Groove A (E) : — Groove B (D) : 9～20 Groove C : 11～20	○	○	○	Groove A (E) : — Groove B (D), C : 11～20
	Rod side	○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 10～29 Groove C : 12～27	○	○	○	Groove A (E) : — Groove B (D) : 14～30 Groove C : 16～30	○	○	○	Groove A (E) : — Groove B (D), C : 16～30
	Rod side	○	○	○		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15～34 Groove C : 17～32	○	○	○	Groove A (E) : — Groove B (D) : 19～39 Groove C : 21～37	○	○	○	Groove A (E) : — Groove B (D), C : 21～36
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 20～39 Groove C : 22～37	○	○	○	Groove A (E) : — Groove B (D) : 24～44 Groove C : 26～42	○	○	○	Groove A (E) : — Groove B (D), C : 26～41
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25～44 Groove C : 27～42	○	○	○	Groove A (E) : — Groove B (D) : 29～49 Groove C : 31～47	○	○	○	Groove A (E) : — Groove B (D), C : 31～46
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30～49 Groove C : 32～47	○	○	○	Groove A (E) : — Groove B (D) : 34～54 Groove C : 36～52	○	○	○	Groove A (E) : — Groove B (D), C : 36～51
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35～54 Groove C : 37～52	○	○	○	Groove A (E) : — Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40～59 Groove C : 42～57	○	○	○	Groove A (E) : — Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45～64 Groove C : 47～62	○	○	○	Groove A (E) : — Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : — Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : — Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : — Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : — Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : — Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : — Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Head side end keep cylinder (TBDAK-HL)

■In the case of using 3 head side mounting holes on the body

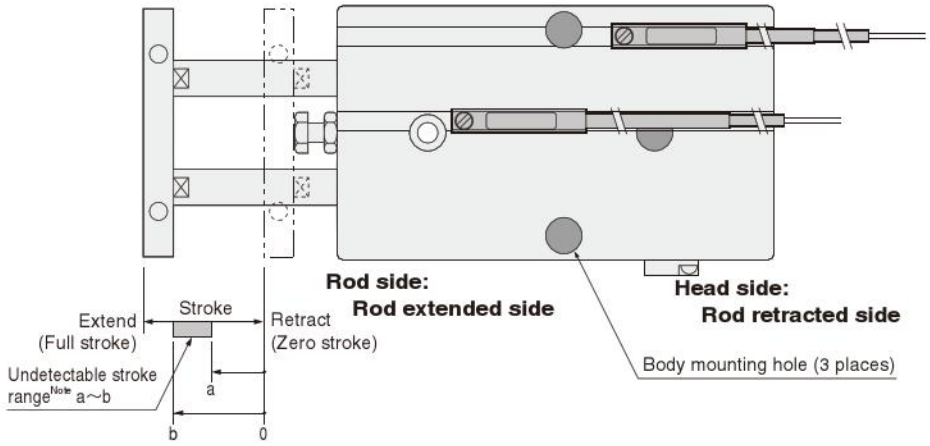

●Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

●Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	○	○	Groove A (E) : 0～10 Groove B (D) : 2～10 Groove C : 4～10	△	○	○	Groove A (E) : 2～10 Groove B (D) : 6～10 Groove C : 8～10	○	○	○	Groove A (E) : — Groove B (D), C : 7～10
	Rod side	△	×	×		△	×	×		○	×	×	
20	Head side	△	○	○	Groove A (E) : 0～12 Groove B (D) : 7～20 Groove C : 9～20	△	○	○	Groove A (E) : 2～15 Groove B (D) : 11～20 Groove C : 13～20	○	○	○	Groove A (E) : — Groove B (D), C : 12～20
	Rod side	△	×	×		△	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 12～26 Groove C : 14～24	○	○	○	Groove A (E) : 2～15 Groove B (D) : 16～30 Groove C : 18～30	○	○	○	Groove A (E) : — Groove B (D), C : 17～29
	Rod side	○	○	○		○	×	×		○	○	○	
40	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 17～31 Groove C : 19～29	○	○	○	Groove A (E) : 2～15 Groove B (D) : 21～37 Groove C : 23～35	○	○	○	Groove A (E) : — Groove B (D), C : 22～34
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 22～36 Groove C : 24～34	○	○	○	Groove A (E) : 2～15 Groove B (D) : 26～42 Groove C : 28～40	○	○	○	Groove A (E) : — Groove B (D), C : 27～39
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 27～41 Groove C : 29～39	○	○	○	Groove A (E) : 2～15 Groove B (D) : 31～47 Groove C : 33～45	○	○	○	Groove A (E) : — Groove B (D), C : 32～44
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 32～46 Groove C : 34～44	○	○	○	Groove A (E) : 2～15 Groove B (D) : 36～52 Groove C : 38～50	○	○	○	Groove A (E) : — Groove B (D), C : 37～49
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 37～51 Groove C : 39～49	○	○	○	Groove A (E) : 2～15 Groove B (D) : 41～57 Groove C : 43～55	○	○	○	Groove A (E) : — Groove B (D), C : 42～54
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 42～56 Groove C : 44～54	○	○	○	Groove A (E) : 2～15 Groove B (D) : 46～62 Groove C : 48～60	○	○	○	Groove A (E) : — Groove B (D), C : 47～59
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 47～61 Groove C : 49～59	○	○	○	Groove A (E) : 2～15 Groove B (D) : 51～67 Groove C : 53～65	○	○	○	Groove A (E) : — Groove B (D), C : 52～64
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 52～66 Groove C : 54～64	○	○	○	Groove A (E) : 2～15 Groove B (D) : 56～72 Groove C : 58～70	○	○	○	Groove A (E) : — Groove B (D), C : 57～69
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 57～71 Groove C : 59～69	○	○	○	Groove A (E) : 2～15 Groove B (D) : 61～77 Groove C : 63～75	○	○	○	Groove A (E) : — Groove B (D), C : 62～74
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 62～76 Groove C : 64～74	○	○	○	Groove A (E) : 2～15 Groove B (D) : 66～82 Groove C : 68～80	○	○	○	Groove A (E) : — Groove B (D), C : 67～79
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 67～81 Groove C : 69～79	○	○	○	Groove A (E) : 2～15 Groove B (D) : 71～87 Groove C : 73～85	○	○	○	Groove A (E) : — Groove B (D), C : 72～84
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 72～86 Groove C : 74～84	○	○	○	Groove A (E) : 2～15 Groove B (D) : 76～92 Groove C : 78～90	○	○	○	Groove A (E) : — Groove B (D), C : 77～89
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 77～91 Groove C : 79～89	○	○	○	Groove A (E) : 2～15 Groove B (D) : 81～97 Groove C : 83～95	○	○	○	Groove A (E) : — Groove B (D), C : 82～94
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

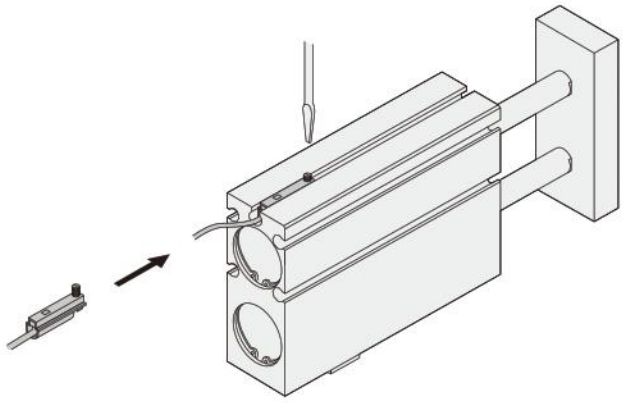

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	×	○	Groove A (E) : 0～10 Groove B (D) : 0～10 Groove C : 2～10	△	○	○	Groove A (E) : 0～10 Groove B (D) : 4～10 Groove C : 6～10	△	○	○	Groove A (E) : — Groove B (D), C : 6～10
	Rod side	△	×	×		△	×	×		△	×	×	
20	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 5～20 Groove C : 7～20	○	○	○	Groove A (E) : 0～17 Groove B (D) : 9～20 Groove C : 11～20	○	○	○	Groove A (E) : — Groove B (D), C : 11～20
	Rod side	○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 10～29 Groove C : 12～27	○	○	○	Groove A (E) : 0～17 Groove B (D) : 14～30 Groove C : 16～30	○	○	○	Groove A (E) : — Groove B (D), C : 16～30
	Rod side	○	○	○		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 15～34 Groove C : 17～32	○	○	○	Groove A (E) : 0～17 Groove B (D) : 19～39 Groove C : 21～37	○	○	○	Groove A (E) : — Groove B (D), C : 21～36
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 2～14 Groove B (D) : 20～39 Groove C : 22～37	○	○	○	Groove A (E) : 0～17 Groove B (D) : 24～44 Groove C : 26～42	○	○	○	Groove A (E) : — Groove B (D), C : 26～41
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 25～44 Groove C : 27～42	○	○	○	Groove A (E) : 0～17 Groove B (D) : 29～49 Groove C : 31～47	○	○	○	Groove A (E) : — Groove B (D), C : 31～46
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 30～49 Groove C : 32～47	○	○	○	Groove A (E) : 0～17 Groove B (D) : 34～54 Groove C : 36～52	○	○	○	Groove A (E) : — Groove B (D), C : 36～51
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0～12 Groove B (D) : 35～54 Groove C : 37～52	○	○	○	Groove A (E) : 0～17 Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 40～59 Groove C : 42～57	○	○	○	Groove A (E) : 0～17 Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 45～64 Groove C : 47～62	○	○	○	Groove A (E) : 0～17 Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : 0～17 Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : 0～17 Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : 0～17 Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : 0～17 Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : 0～17 Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0～14 Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : 0～17 Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Head side end keep cylinder (TBDAK-HL)

■In the case of using 3 rod side mounting holes on the body

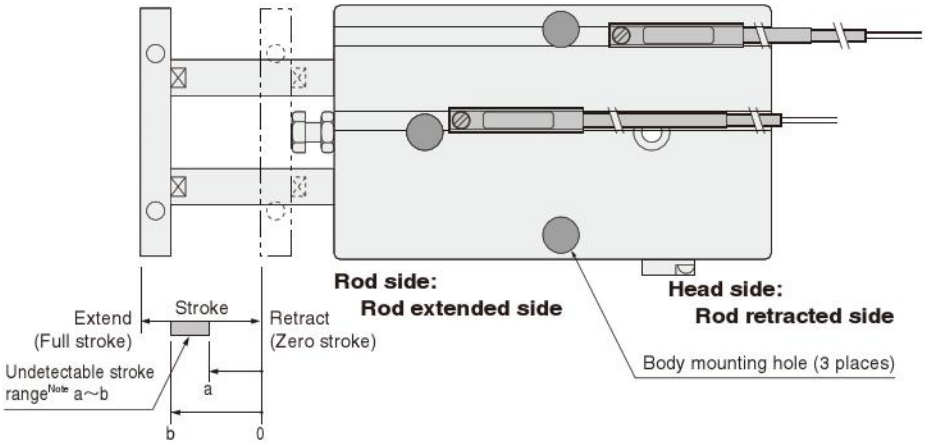

●Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

●Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke / Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	○	○	Groove A (E) : — Groove B (D) : 2～10 Groove C : 4～10	○	○	○	Groove A (E) : — Groove B (D) : 6～10 Groove C : 8～10	○	○	○	Groove A (E) : — Groove B (D), C : 7～10
	Rod side	○	×	×		○	×	×		○	×	×	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 7～20 Groove C : 9～20	○	○	○	Groove A (E) : — Groove B (D) : 11～20 Groove C : 13～20	○	○	○	Groove A (E) : — Groove B (D), C : 12～20
	Rod side	○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 12～26 Groove C : 14～24	○	○	○	Groove A (E) : — Groove B (D) : 16～30 Groove C : 18～30	○	○	○	Groove A (E) : — Groove B (D), C : 17～29
	Rod side	○	○	○		○	×	×		○	○	○	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 17～31 Groove C : 19～29	○	○	○	Groove A (E) : — Groove B (D) : 21～37 Groove C : 23～35	○	○	○	Groove A (E) : — Groove B (D), C : 22～34
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 22～36 Groove C : 24～34	○	○	○	Groove A (E) : — Groove B (D) : 26～42 Groove C : 28～40	○	○	○	Groove A (E) : — Groove B (D), C : 27～39
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 27～41 Groove C : 29～39	○	○	○	Groove A (E) : — Groove B (D) : 31～47 Groove C : 33～45	○	○	○	Groove A (E) : — Groove B (D), C : 32～44
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 32～46 Groove C : 34～44	○	○	○	Groove A (E) : — Groove B (D) : 36～52 Groove C : 38～50	○	○	○	Groove A (E) : — Groove B (D), C : 37～49
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37～51 Groove C : 39～49	○	○	○	Groove A (E) : — Groove B (D) : 41～57 Groove C : 43～55	○	○	○	Groove A (E) : — Groove B (D), C : 42～54
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42～56 Groove C : 44～54	○	○	○	Groove A (E) : — Groove B (D) : 46～62 Groove C : 48～60	○	○	○	Groove A (E) : — Groove B (D), C : 47～59
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47～61 Groove C : 49～59	○	○	○	Groove A (E) : — Groove B (D) : 51～67 Groove C : 53～65	○	○	○	Groove A (E) : — Groove B (D), C : 52～64
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52～66 Groove C : 54～64	○	○	○	Groove A (E) : — Groove B (D) : 56～72 Groove C : 58～70	○	○	○	Groove A (E) : — Groove B (D), C : 57～69
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57～71 Groove C : 59～69	○	○	○	Groove A (E) : — Groove B (D) : 61～77 Groove C : 63～75	○	○	○	Groove A (E) : — Groove B (D), C : 62～74
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62～76 Groove C : 64～74	○	○	○	Groove A (E) : — Groove B (D) : 66～82 Groove C : 68～80	○	○	○	Groove A (E) : — Groove B (D), C : 67～79
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67～81 Groove C : 69～79	○	○	○	Groove A (E) : — Groove B (D) : 71～87 Groove C : 73～85	○	○	○	Groove A (E) : — Groove B (D), C : 72～84
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72～86 Groove C : 74～84	○	○	○	Groove A (E) : — Groove B (D) : 76～92 Groove C : 78～90	○	○	○	Groove A (E) : — Groove B (D), C : 77～89
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77～91 Groove C : 79～89	○	○	○	Groove A (E) : — Groove B (D) : 81～97 Groove C : 83～95	○	○	○	Groove A (E) : — Groove B (D), C : 82～94
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

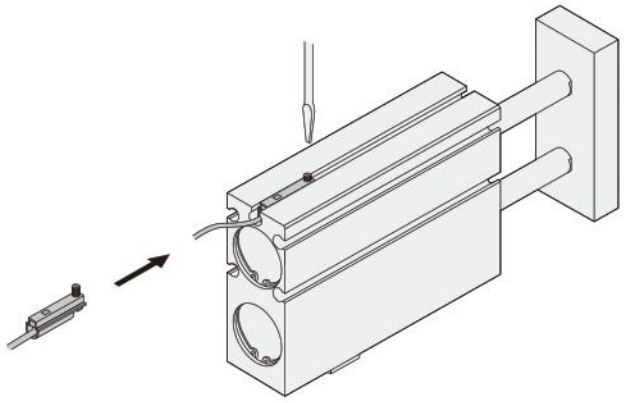

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	×	○	Groove A (E) : — Groove B (D) : 0～10 Groove C : 2～10	△	○	○	Groove A (E) : — Groove B (D) : 4～10 Groove C : 6～10	△	○	○	Groove A (E) : — Groove B (D), C : 6～10
	Rod side	△	×	×		△	×	×		△	×	×	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 5～20 Groove C : 7～20	○	○	○	Groove A (E) : — Groove B (D) : 9～20 Groove C : 11～20	○	○	○	Groove A (E) : — Groove B (D), C : 11～20
	Rod side	○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 10～29 Groove C : 12～27	○	○	○	Groove A (E) : — Groove B (D) : 14～30 Groove C : 16～30	○	○	○	Groove A (E) : — Groove B (D), C : 16～30
	Rod side	○	○	○		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15～34 Groove C : 17～32	○	○	○	Groove A (E) : — Groove B (D) : 19～39 Groove C : 21～37	○	○	○	Groove A (E) : — Groove B (D), C : 21～36
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 20～39 Groove C : 22～37	○	○	○	Groove A (E) : — Groove B (D) : 24～44 Groove C : 26～42	○	○	○	Groove A (E) : — Groove B (D), C : 26～41
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25～44 Groove C : 27～42	○	○	○	Groove A (E) : — Groove B (D) : 29～49 Groove C : 31～47	○	○	○	Groove A (E) : — Groove B (D), C : 31～46
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30～49 Groove C : 32～47	○	○	○	Groove A (E) : — Groove B (D) : 34～54 Groove C : 36～52	○	○	○	Groove A (E) : — Groove B (D), C : 36～51
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35～54 Groove C : 37～52	○	○	○	Groove A (E) : — Groove B (D) : 39～59 Groove C : 41～57	○	○	○	Groove A (E) : — Groove B (D), C : 41～56
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40～59 Groove C : 42～57	○	○	○	Groove A (E) : — Groove B (D) : 44～64 Groove C : 46～62	○	○	○	Groove A (E) : — Groove B (D), C : 46～61
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45～64 Groove C : 47～62	○	○	○	Groove A (E) : — Groove B (D) : 49～69 Groove C : 51～67	○	○	○	Groove A (E) : — Groove B (D), C : 51～66
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : — Groove B (D) : 54～74 Groove C : 56～72	○	○	○	Groove A (E) : — Groove B (D), C : 56～71
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : — Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : — Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : — Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : — Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : — Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Rod side end keep cylinder (TBDAK-RL)

■In the case of using 4 mounting holes on the body

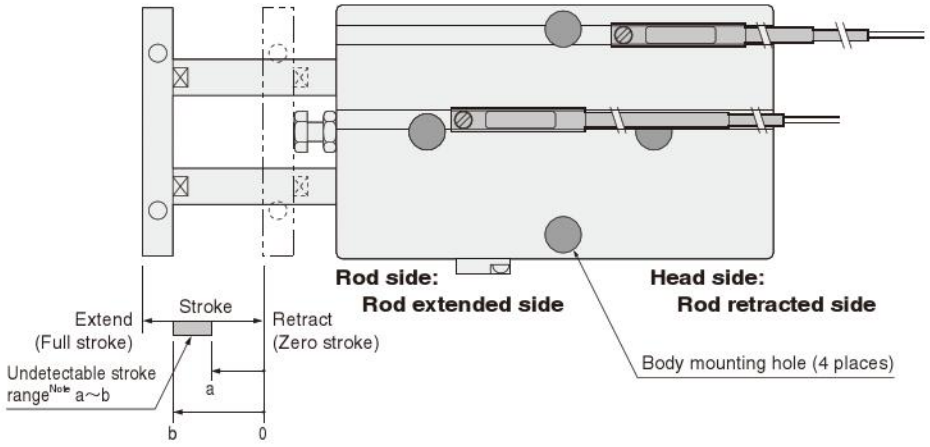

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

●Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions.
The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.
This procedure is not necessary for ϕ25 [0.984in.], however, where no interference occurs.

●Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke	Mounting groove	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0～10 Groove B (D) : — Groove C : —	○	△	○	Groove A (E) : 2～10 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	×	△	△		×	△	○		○	○	○	
20	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : 2～15 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : 2～15 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 37～40 Groove C : 39～40	○	○	○	Groove A (E) : 2～15 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	○	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 42～50 Groove C : 44～50	○	○	○	Groove A (E) : 2～15 Groove B (D) : 46～50 Groove C : 48～50	○	○	○	Groove A (E) : — Groove B (D), C : 47～50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 47～60 Groove C : 49～60	○	○	○	Groove A (E) : 2～15 Groove B (D) : 51～60 Groove C : 53～60	○	○	○	Groove A (E) : — Groove B (D), C : 52～60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 52～66 Groove C : 54～64	○	○	○	Groove A (E) : 2～15 Groove B (D) : 56～70 Groove C : 58～70	○	○	○	Groove A (E) : — Groove B (D), C : 57～69
	Rod side	○	○	○		○	×	×		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 57～71 Groove C : 59～69	○	○	○	Groove A (E) : 2～15 Groove B (D) : 61～77 Groove C : 63～75	○	○	○	Groove A (E) : — Groove B (D), C : 62～74
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 62～76 Groove C : 64～74	○	○	○	Groove A (E) : 2～15 Groove B (D) : 66～82 Groove C : 68～80	○	○	○	Groove A (E) : — Groove B (D), C : 67～79
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 67～81 Groove C : 69～79	○	○	○	Groove A (E) : 2～15 Groove B (D) : 71～87 Groove C : 73～85	○	○	○	Groove A (E) : — Groove B (D), C : 72～84
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 72～86 Groove C : 74～84	○	○	○	Groove A (E) : 2～15 Groove B (D) : 76～92 Groove C : 78～90	○	○	○	Groove A (E) : — Groove B (D), C : 77～89
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 77～91 Groove C : 79～89	○	○	○	Groove A (E) : 2～15 Groove B (D) : 81～97 Groove C : 83～95	○	○	○	Groove A (E) : — Groove B (D), C : 82～94
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 82～96 Groove C : 84～94	○	○	○	Groove A (E) : 2～15 Groove B (D) : 86～102 Groove C : 88～100	○	○	○	Groove A (E) : — Groove B (D), C : 87～99
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 87～101 Groove C : 89～99	○	○	○	Groove A (E) : 2～15 Groove B (D) : 91～107 Groove C : 93～105	○	○	○	Groove A (E) : — Groove B (D), C : 92～104
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 92～106 Groove C : 94～104	○	○	○	Groove A (E) : 2～15 Groove B (D) : 96～112 Groove C : 98～110	○	○	○	Groove A (E) : — Groove B (D), C : 97～109
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 97～111 Groove C : 99～109	○	○	○	Groove A (E) : 2～15 Groove B (D) : 101～117 Groove C : 103～115	○	○	○	Groove A (E) : — Groove B (D), C : 102～114
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

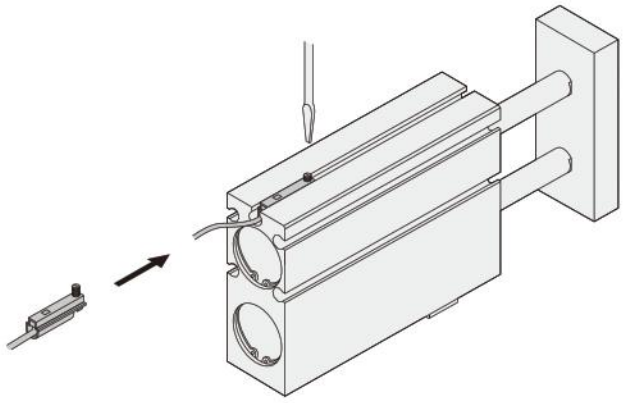

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0～10 Groove B (D) : — Groove C : —	×	△	△	Groove A (E) : 0～10 Groove B (D) : — Groove C : —	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	×	△	△		×	△	△		△	△	△	
20	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : — Groove C : —	×	○	○	Groove A (E) : 0～17 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 29～30 Groove C : —	×	○	○	Groove A (E) : 0～17 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 35～40 Groove C : 37～40	×	○	○	Groove A (E) : 0～17 Groove B (D) : 39～40 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	×	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 40～50 Groove C : 42～50	×	○	○	Groove A (E) : 0～17 Groove B (D) : 44～50 Groove C : 46～50	○	○	○	Groove A (E) : — Groove B (D), C : 46～60
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 45～60 Groove C : 47～60	×	○	○	Groove A (E) : 0～17 Groove B (D) : 49～60 Groove C : 51～60	○	○	○	Groove A (E) : — Groove B (D), C : 51～60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 50～69 Groove C : 52～67	×	○	○	Groove A (E) : 0～17 Groove B (D) : 54～70 Groove C : 56～70	○	○	○	Groove A (E) : — Groove B (D), C : 56～70
	Rod side	○	○	○		○	×	×		○	×	×	
80	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 55～74 Groove C : 57～72	×	○	○	Groove A (E) : 0～17 Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 60～79 Groove C : 62～77	×	○	○	Groove A (E) : 0～17 Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 65～84 Groove C : 67～82	×	○	○	Groove A (E) : 0～17 Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 70～89 Groove C : 72～87	×	○	○	Groove A (E) : 0～17 Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 75～94 Groove C : 77～92	×	○	○	Groove A (E) : 0～17 Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 80～99 Groove C : 82～97	×	○	○	Groove A (E) : 0～17 Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 85～104 Groove C : 87～102	×	○	○	Groove A (E) : 0～17 Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 90～109 Groove C : 92～107	×	○	○	Groove A (E) : 0～17 Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 95～114 Groove C : 97～112	×	○	○	Groove A (E) : 0～17 Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Rod side end keep cylinder (TBDAK-RL)

■In the case of using 2 center mounting holes on the body

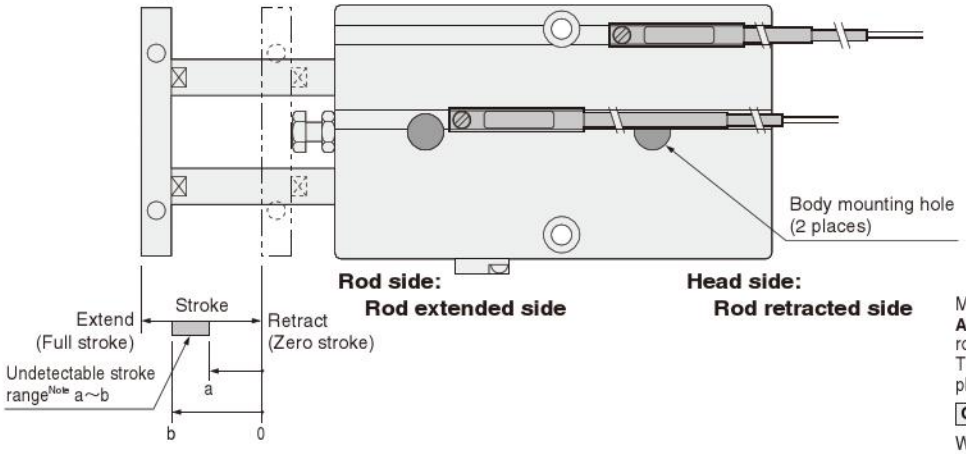

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

●Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions.
The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.
This procedure is not necessary for ϕ25 [0.984in.], however, where no interference occurs.

●Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke / Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	○	○	Groove A (E) : 0～10 Groove B (D), C : —	○	○	○	Groove A (E) : 2～10 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	×	○	○		×	○	○		○	○	○	
20	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D), C : —	○	○	○	Groove A (E) : 2～15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

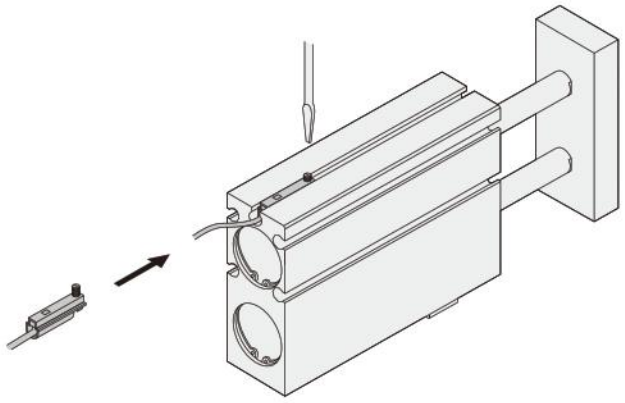

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	○	○	Groove A (E) : 0～10 Groove B (D), C : —	×	○	○	Groove A (E) : 0～10 Groove B (D), C : —	△	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	×	○	○		×	○	○		△	○	○	
20	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D), C : —	×	○	○	Groove A (E) : 0～17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Rod side end keep cylinder (TBDAK-RL)

■ In the case of using 2 mounting holes on the body (one on each side)

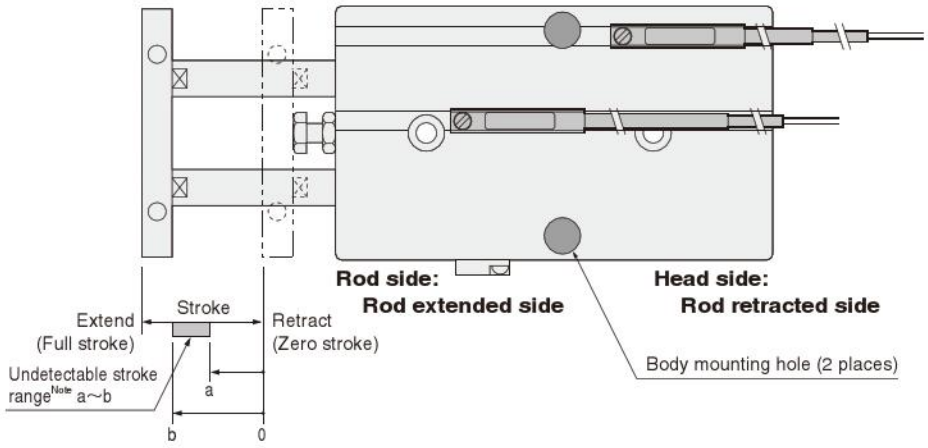

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke / Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	△	△	Groove A (E) : — Groove B (D) : — Groove C : —	△	△	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	△	△		△	△	○		○	○	○	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37～40 Groove C : 39～40	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42～50 Groove C : 44～50	○	○	○	Groove A (E) : — Groove B (D) : 46～50 Groove C : 48～50	○	○	○	Groove A (E) : — Groove B (D), C : 47～50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47～60 Groove C : 49～60	○	○	○	Groove A (E) : — Groove B (D) : 51～60 Groove C : 53～60	○	○	○	Groove A (E) : — Groove B (D), C : 52～60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52～66 Groove C : 54～64	○	○	○	Groove A (E) : — Groove B (D) : 56～70 Groove C : 58～70	○	○	○	Groove A (E) : — Groove B (D), C : 57～69
	Rod side	○	○	○		○	×	×		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57～71 Groove C : 59～69	○	○	○	Groove A (E) : — Groove B (D) : 61～77 Groove C : 63～75	○	○	○	Groove A (E) : — Groove B (D), C : 62～74
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62～76 Groove C : 64～74	○	○	○	Groove A (E) : — Groove B (D) : 66～82 Groove C : 68～80	○	○	○	Groove A (E) : — Groove B (D), C : 67～79
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67～81 Groove C : 69～79	○	○	○	Groove A (E) : — Groove B (D) : 71～87 Groove C : 73～85	○	○	○	Groove A (E) : — Groove B (D), C : 72～84
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72～86 Groove C : 74～84	○	○	○	Groove A (E) : — Groove B (D) : 76～92 Groove C : 78～90	○	○	○	Groove A (E) : — Groove B (D), C : 77～89
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77～91 Groove C : 79～89	○	○	○	Groove A (E) : — Groove B (D) : 81～97 Groove C : 83～95	○	○	○	Groove A (E) : — Groove B (D), C : 82～94
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 82～96 Groove C : 84～94	○	○	○	Groove A (E) : — Groove B (D) : 86～102 Groove C : 88～100	○	○	○	Groove A (E) : — Groove B (D), C : 87～99
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 87～101 Groove C : 89～99	○	○	○	Groove A (E) : — Groove B (D) : 91～107 Groove C : 93～105	○	○	○	Groove A (E) : — Groove B (D), C : 92～104
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 92～106 Groove C : 94～104	○	○	○	Groove A (E) : — Groove B (D) : 96～112 Groove C : 98～110	○	○	○	Groove A (E) : — Groove B (D), C : 97～109
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 97～111 Groove C : 99～109	○	○	○	Groove A (E) : — Groove B (D) : 101～117 Groove C : 103～115	○	○	○	Groove A (E) : — Groove B (D), C : 102～114
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

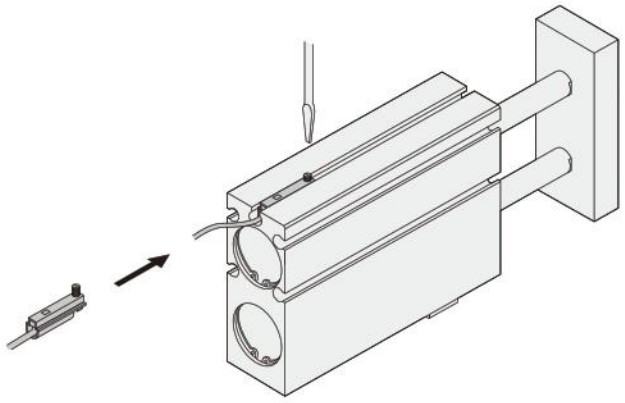

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	△	△	Groove A (E) : — Groove B (D) : — Groove C : —	△	△	△	Groove A (E) : — Groove B (D) : 8～10 Groove C : 10	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	△	△	△		△	△	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 29～30 Groove C : 22～30	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35～40 Groove C : 37～40	○	○	○	Groove A (E) : — Groove B (D) : 39～40 Groove C : 31～40	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	×	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40～50 Groove C : 42～50	○	○	○	Groove A (E) : — Groove B (D) : 44～50 Groove C : 46～50	○	○	○	Groove A (E) : — Groove B (D), C : 46～50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45～60 Groove C : 47～60	○	○	○	Groove A (E) : — Groove B (D) : 49～60 Groove C : 51～60	○	○	○	Groove A (E) : — Groove B (D), C : 51～60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : — Groove B (D) : 54～70 Groove C : 56～70	○	○	○	Groove A (E) : — Groove B (D), C : 56～70
	Rod side	○	○	○		○	×	×		○	×	×	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : — Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : — Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : — Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : — Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : — Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 80～99 Groove C : 82～97	○	○	○	Groove A (E) : — Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 85～104 Groove C : 87～102	○	○	○	Groove A (E) : — Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 90～109 Groove C : 92～107	○	○	○	Groove A (E) : — Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 95～114 Groove C : 97～112	○	○	○	Groove A (E) : — Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Rod side end keep cylinder (TBDAK-RL)

■ In the case of using 3 head side mounting holes on the body

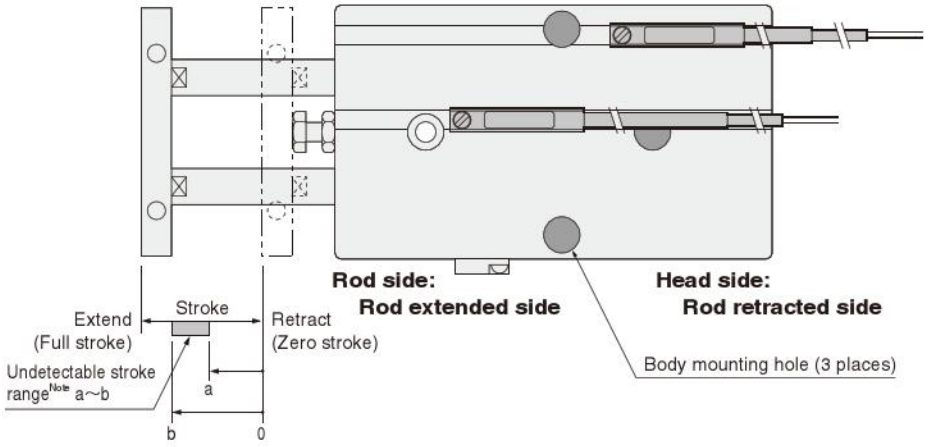

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke / Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0～10 Groove B (D) : — Groove C : —	○	△	○	Groove A (E) : 2～10 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	×	△	△		×	△	○		○	○	○	
20	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : 2～15 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : 2～15 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 37～40 Groove C : 39～40	○	○	○	Groove A (E) : 2～15 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	○	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 42～50 Groove C : 44～50	○	○	○	Groove A (E) : 2～15 Groove B (D) : 46～50 Groove C : 48～50	○	○	○	Groove A (E) : — Groove B (D), C : 47～50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 47～60 Groove C : 49～60	○	○	○	Groove A (E) : 2～15 Groove B (D) : 51～60 Groove C : 53～60	○	○	○	Groove A (E) : — Groove B (D), C : 52～60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 52～66 Groove C : 54～64	○	○	○	Groove A (E) : 2～15 Groove B (D) : 56～70 Groove C : 58～70	○	○	○	Groove A (E) : — Groove B (D), C : 57～69
	Rod side	○	○	○		○	×	×		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 57～71 Groove C : 59～69	○	○	○	Groove A (E) : 2～15 Groove B (D) : 61～77 Groove C : 63～75	○	○	○	Groove A (E) : — Groove B (D), C : 62～74
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 62～76 Groove C : 64～74	○	○	○	Groove A (E) : 2～15 Groove B (D) : 66～82 Groove C : 68～80	○	○	○	Groove A (E) : — Groove B (D), C : 67～79
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 67～81 Groove C : 69～79	○	○	○	Groove A (E) : 2～15 Groove B (D) : 71～87 Groove C : 73～85	○	○	○	Groove A (E) : — Groove B (D), C : 72～84
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 72～86 Groove C : 74～84	○	○	○	Groove A (E) : 2～15 Groove B (D) : 76～92 Groove C : 78～90	○	○	○	Groove A (E) : — Groove B (D), C : 77～89
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 77～91 Groove C : 79～89	○	○	○	Groove A (E) : 2～15 Groove B (D) : 81～97 Groove C : 83～95	○	○	○	Groove A (E) : — Groove B (D), C : 82～94
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 82～96 Groove C : 84～94	○	○	○	Groove A (E) : 2～15 Groove B (D) : 86～102 Groove C : 88～100	○	○	○	Groove A (E) : — Groove B (D), C : 87～99
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 87～101 Groove C : 89～99	○	○	○	Groove A (E) : 2～15 Groove B (D) : 91～107 Groove C : 93～105	○	○	○	Groove A (E) : — Groove B (D), C : 92～104
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 92～106 Groove C : 94～104	○	○	○	Groove A (E) : 2～15 Groove B (D) : 96～112 Groove C : 98～110	○	○	○	Groove A (E) : — Groove B (D), C : 97～109
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 97～111 Groove C : 99～109	○	○	○	Groove A (E) : 2～15 Groove B (D) : 101～117 Groove C : 103～115	○	○	○	Groove A (E) : — Groove B (D), C : 102～114
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

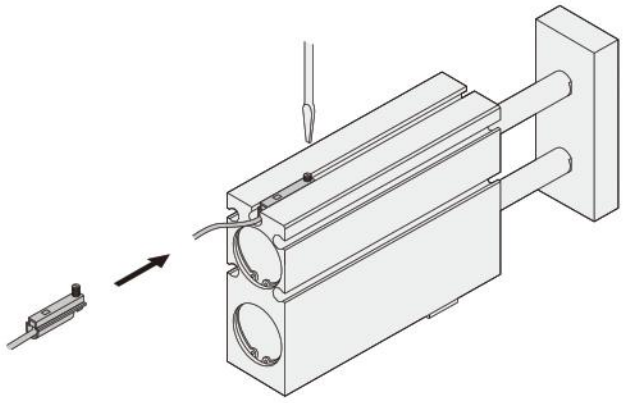

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0～10 Groove B (D) : — Groove C : —	×	△	△	Groove A (E) : 0～10 Groove B (D) : — Groove C : —	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	×	△	△		×	△	△		△	△	△	
20	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : — Groove C : —	×	○	○	Groove A (E) : 0～17 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 29～30 Groove C : 22～30	×	○	○	Groove A (E) : 0～17 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 35～40 Groove C : 37～40	×	○	○	Groove A (E) : 0～17 Groove B (D) : 39～40 Groove C : 31～40	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	×	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 2～14 Groove B (D) : 40～50 Groove C : 42～50	×	○	○	Groove A (E) : 0～17 Groove B (D) : 44～50 Groove C : 46～50	○	○	○	Groove A (E) : — Groove B (D), C : 46～50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 45～60 Groove C : 47～60	×	○	○	Groove A (E) : 0～17 Groove B (D) : 49～60 Groove C : 51～60	○	○	○	Groove A (E) : — Groove B (D), C : 51～60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 50～69 Groove C : 52～67	×	○	○	Groove A (E) : 0～17 Groove B (D) : 54～70 Groove C : 56～70	○	○	○	Groove A (E) : — Groove B (D), C : 56～70
	Rod side	○	○	○		○	×	×		○	×	×	
80	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 55～74 Groove C : 57～72	×	○	○	Groove A (E) : 0～17 Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 60～79 Groove C : 62～77	×	○	○	Groove A (E) : 0～17 Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0～12 Groove B (D) : 65～84 Groove C : 67～82	×	○	○	Groove A (E) : 0～17 Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 70～89 Groove C : 72～87	×	○	○	Groove A (E) : 0～17 Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 75～94 Groove C : 77～92	×	○	○	Groove A (E) : 0～17 Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 80～99 Groove C : 82～97	×	○	○	Groove A (E) : 0～17 Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 85～104 Groove C : 87～102	×	○	○	Groove A (E) : 0～17 Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 90～109 Groove C : 92～107	×	○	○	Groove A (E) : 0～17 Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0～14 Groove B (D) : 95～114 Groove C : 97～112	×	○	○	Groove A (E) : 0～17 Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Rod side end keep cylinder (TBDAK-RL)

■ In the case of using 3 rod side mounting holes on the body

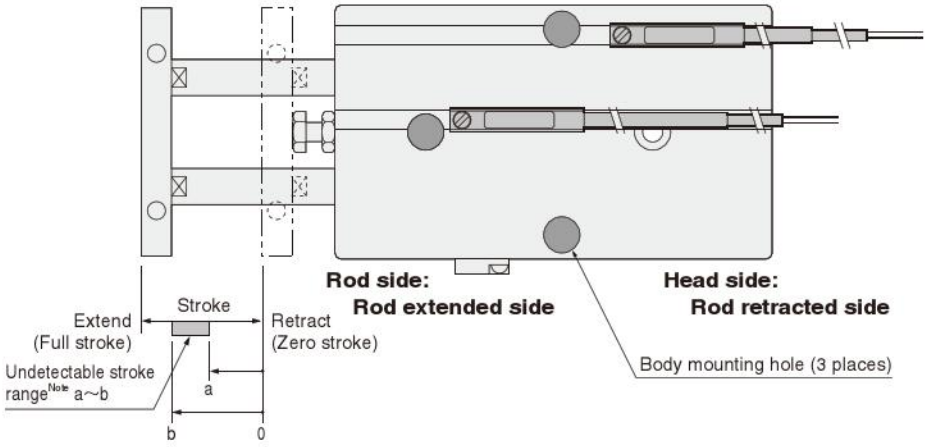

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A**～**E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ16				φ20				φ25			
Stroke / Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	○	△	△	Groove A (E) : — Groove B (D) : — Groove C : —	△	△	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	△	△		△	△	○		○	○	○	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37～40 Groove C : 39～40	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42～50 Groove C : 44～50	○	○	○	Groove A (E) : — Groove B (D) : 46～50 Groove C : 48～50	○	○	○	Groove A (E) : — Groove B (D), C : 47～50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47～60 Groove C : 49～60	○	○	○	Groove A (E) : — Groove B (D) : 51～60 Groove C : 53～60	○	○	○	Groove A (E) : — Groove B (D), C : 52～60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52～66 Groove C : 54～64	○	○	○	Groove A (E) : — Groove B (D) : 56～70 Groove C : 58～70	○	○	○	Groove A (E) : — Groove B (D), C : 57～69
	Rod side	○	○	○		○	×	×		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57～71 Groove C : 59～69	○	○	○	Groove A (E) : — Groove B (D) : 61～77 Groove C : 63～75	○	○	○	Groove A (E) : — Groove B (D), C : 62～74
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62～76 Groove C : 64～74	○	○	○	Groove A (E) : — Groove B (D) : 66～82 Groove C : 68～80	○	○	○	Groove A (E) : — Groove B (D), C : 67～79
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67～81 Groove C : 69～79	○	○	○	Groove A (E) : — Groove B (D) : 71～87 Groove C : 73～85	○	○	○	Groove A (E) : — Groove B (D), C : 72～84
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72～86 Groove C : 74～84	○	○	○	Groove A (E) : — Groove B (D) : 76～92 Groove C : 78～90	○	○	○	Groove A (E) : — Groove B (D), C : 77～89
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77～91 Groove C : 79～89	○	○	○	Groove A (E) : — Groove B (D) : 81～97 Groove C : 83～95	○	○	○	Groove A (E) : — Groove B (D), C : 82～94
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 82～96 Groove C : 84～94	○	○	○	Groove A (E) : — Groove B (D) : 86～102 Groove C : 88～100	○	○	○	Groove A (E) : — Groove B (D), C : 87～99
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 87～101 Groove C : 89～99	○	○	○	Groove A (E) : — Groove B (D) : 91～107 Groove C : 93～105	○	○	○	Groove A (E) : — Groove B (D), C : 92～104
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 92～106 Groove C : 94～104	○	○	○	Groove A (E) : — Groove B (D) : 96～112 Groove C : 98～110	○	○	○	Groove A (E) : — Groove B (D), C : 97～109
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 97～111 Groove C : 99～109	○	○	○	Groove A (E) : — Groove B (D) : 101～117 Groove C : 103～115	○	○	○	Groove A (E) : — Groove B (D), C : 102～114
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1～0.2N·m [0.9～1.8in·lbf].

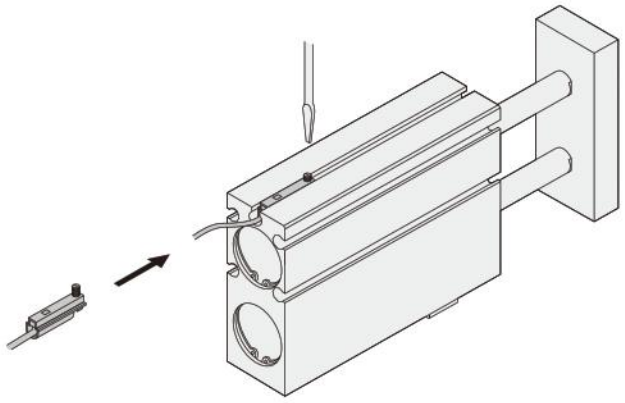

●Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		ϕ16				ϕ20				ϕ25			
Stroke \ Mounting groove		A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch	A E	B D	C	Undetectable stroke range of sensor switch
10	Head side	△	△	△	Groove A (E) : — Groove B (D) : 8～10 Groove C : —	△	△	△	Groove A (E) : — Groove B (D) : 8～10 Groove C : 10	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	△	△	△		△	△	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15～20 Groove C : 17～20	○	○	○	Groove A (E) : — Groove B (D) : 18～20 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 29～30 Groove C : —	○	○	○	Groove A (E) : — Groove B (D) : 24～30 Groove C : 26～30	○	○	○	Groove A (E) : — Groove B (D), C : 26～30
	Rod side	○	×	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35～40 Groove C : 37～40	○	○	○	Groove A (E) : — Groove B (D) : 39～40 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : 31～40
	Rod side	○	×	×		○	×	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40～50 Groove C : 42～50	○	○	○	Groove A (E) : — Groove B (D) : 44～50 Groove C : 46～50	○	○	○	Groove A (E) : — Groove B (D), C : 46～50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45～60 Groove C : 47～60	○	○	○	Groove A (E) : — Groove B (D) : 49～60 Groove C : 51～60	○	○	○	Groove A (E) : — Groove B (D), C : 51～60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50～69 Groove C : 52～67	○	○	○	Groove A (E) : — Groove B (D) : 54～70 Groove C : 56～70	○	○	○	Groove A (E) : — Groove B (D), C : 56～70
	Rod side	○	○	○		○	○	×		○	×	×	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55～74 Groove C : 57～72	○	○	○	Groove A (E) : — Groove B (D) : 59～79 Groove C : 61～77	○	○	○	Groove A (E) : — Groove B (D), C : 61～76
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60～79 Groove C : 62～77	○	○	○	Groove A (E) : — Groove B (D) : 64～84 Groove C : 66～82	○	○	○	Groove A (E) : — Groove B (D), C : 66～81
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65～84 Groove C : 67～82	○	○	○	Groove A (E) : — Groove B (D) : 69～89 Groove C : 71～87	○	○	○	Groove A (E) : — Groove B (D), C : 71～86
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70～89 Groove C : 72～87	○	○	○	Groove A (E) : — Groove B (D) : 74～94 Groove C : 76～92	○	○	○	Groove A (E) : — Groove B (D), C : 76～91
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75～94 Groove C : 77～92	○	○	○	Groove A (E) : — Groove B (D) : 79～99 Groove C : 81～97	○	○	○	Groove A (E) : — Groove B (D), C : 81～96
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 80～99 Groove C : 82～97	○	○	○	Groove A (E) : — Groove B (D) : 84～104 Groove C : 86～102	○	○	○	Groove A (E) : — Groove B (D), C : 86～101
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 85～104 Groove C : 87～102	○	○	○	Groove A (E) : — Groove B (D) : 89～109 Groove C : 91～107	○	○	○	Groove A (E) : — Groove B (D), C : 91～106
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 90～109 Groove C : 92～107	○	○	○	Groove A (E) : — Groove B (D) : 94～114 Groove C : 96～112	○	○	○	Groove A (E) : — Groove B (D), C : 96～111
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 95～114 Groove C : 97～112	○	○	○	Groove A (E) : — Groove B (D) : 99～119 Groove C : 101～117	○	○	○	Groove A (E) : — Groove B (D), C : 101～116
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Mounting and adjustment

Allowable lateral load

The lateral (side) load on the rod end should be at or below the graph values listed below.

ϕ 10 [0.394in.]



ϕ 16 [0.630in.]

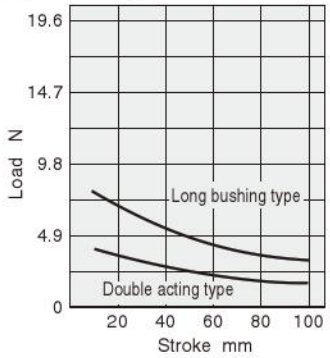

ϕ 20 [0.787in.]

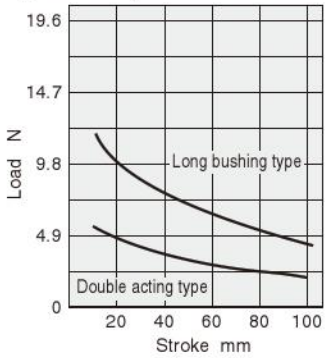

ϕ 25 [0.984in.]

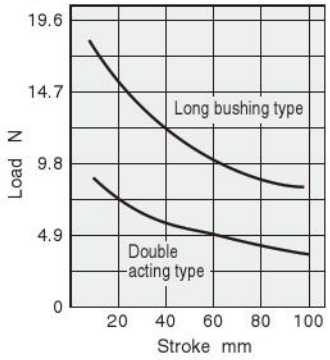

ϕ 32 [1.260in.]

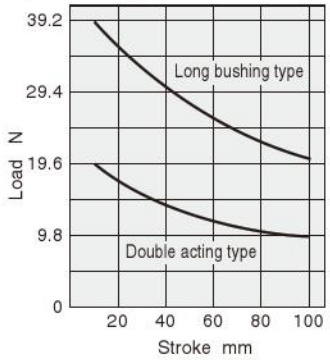

Remark: The ϕ16~ϕ25 double acting standard types also include end keep cylinders.

1N = 0.2248lbf.
1mm = 0.0394in.

Square plate eccentricity

For the eccentricity of the square plate without load, use the graph values listed below as guides.

——— Double acting type - - - - - - Long bushing type

ϕ 10 [0.394in.]



ϕ 16 [0.630in.]



ϕ 20 [0.787in.]



ϕ 25 [0.984in.]

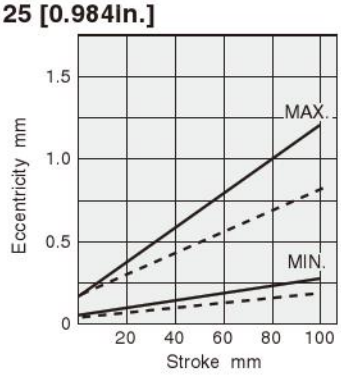

ϕ 32 [1.260in.]

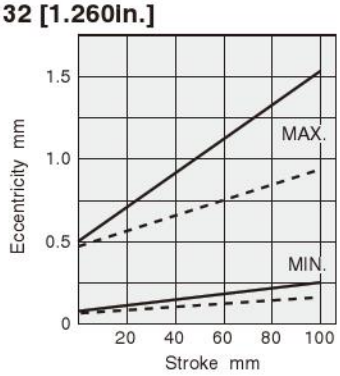

Remark: The ϕ16~ϕ25 double acting standard types also include end keep cylinders.

1mm = 0.0394in.

Mounting and adjustment

Mounting

1. While any mounting direction is allowed, the mounting surface should always be flat. Twisting or bending during mounting may disturb the accuracy and may also result in air leaks or improper operation.
2. Care should be taken that scratches or dents on the cylinder's mounting surface may damage its flatness.
3. The hexagon socket head bolt on the rod end square plate has been mounted with a conical washer. Always confirm that the rod end square plate and hexagon socket head bolts are secured before using the cylinder.

Stroke adjustment

On the Twin Rod cylinder, stroke adjusting is easy within a range of –5～0mm [–0.197～0in.] (with the exception of -HL: Head side end keep cylinder). Turn the stopper bolt to the left (counterclockwise) to shorten the stroke. Use a lock nut to tighten and secure the stopper in place after adjustment. Do not tighten the bolt to the right (clockwise) beyond the standard position. The stroke at shipping is set to the standard stroke. Do not adjust it to larger than the standard stroke. On the end keep cylinder, avoid application using an external stopper installed on the lock side to adjust the stroke, because it could cause the lock to be incapable of operating.

Cylinder speed

Use the cylinder at a speed of 500mm/s [19.7in./sec.] or less (use a speed controller for adjustment). For high speeds (500mm/s [19.7in./sec.]), install an external stopper, etc., to prevent direct shocks to the cylinder. Consult us if the situation will not permit installation of an external stopper, etc.

Control circuit for the end keep cylinder

1. For control of the twin rod end keep cylinder, we recommend the use of 2-position, 4-, 5-port valves. Avoid the use of control circuit with ABR connection (exhaust center) 3-position valves that exhaust air from 2 delivery ports.
2. Always use meter-out control for speed control. Meter-in control may result in failure of the locking mechanism to release.
3. Always set the air pressure to 0.15MPa [22psi.] or larger.

Notes: 1. It is dangerous to supply air to a connection port on a side with a locking mechanism while the cylinder has already been exhausted, because the piston rod may suddenly extend (or retract). In addition, since the lock piston could also cause galling of the lock piston and piston rod, resulting in defective operation, always supply air to the connection port on the opposite the one adjacent to the locking mechanism to ensure applying back pressure.
2. When restarting operations after air has been exhausted from the cylinder due to completion of operations or to an emergency stop, always start by supplying air to a connection port on the opposite the one adjacent to the locking mechanism.
3. Connect the valve port A (NC) to the connection port on the side with the locking mechanism.

Manual operation of locking mechanism

While the locking mechanism is normally released automatically through cylinder operations, it can also be released manually. For manual release, insert an M3×0.5 screw that has 30mm [1.18in.] screw length into the opening for manual override, thread it in about 3 turns into the internal lock piston, and then pull up the screw. To maintain the manual override for adjustment, etc., thread the locknut onto the screw and, with the locking mechanism in a released state, tighten the locknut against the cylinder.



Notes: 1. It is dangerous to release the lock when load (weight) is present on the piston rod, because it may cause the unintended piston rod's extension (or retraction). In this case, always supply air to the connection port opposite the one adjacent to the locking mechanism before releasing the locking mechanism.
2. If the locking mechanism cannot easily be released even with manual override, it could be the result of galling of the lock piston and piston rod. In this case, supply air to the connection port opposite the one adjacent to the locking mechanism before releasing the locking mechanism.
3. Water, oil, dust, etc., intruding through the opening for manual override may be a cause of defective locks or other erratic operation. If using in locations subject to dripping water, dripping oil, etc., or large amounts of dust, use a cover to protect the unit.

Sensor switch

1. In the standard cylinder, the magnet for sensor switch is built-in. Mounting a sensor switch will enable use in sensor switch applications.
2. Do not use a sensor switch mounting screw to secure the sensor switch into the body mounting hole. The sensor switch mounting screw could fall out.

General precautions

Media

1. Always thoroughly blow off (use compressed air) the tubing before piping. Entering chips, sealing tape, rust, etc., generated during piping work could result in air leaks or other defective operation.
2. Use air for the media. For the use of any other media, consult us.
3. Air used for the cylinder should be clean air that contains no deteriorated compressor oil, etc. Install an air filter (filtration of a minimum 40 µm) near the cylinder or valve to remove collected liquid or dust. In addition, drain the air filter periodically. Collected liquid or dust entering the cylinder may cause improper operation.

Lubrication

The product can be used without lubrication, if lubrication is required, use Turbine Oil Class 1 (ISO VG32) or equivalent. Avoid using spindle oil or machine oil.

Atmosphere

1. If using in locations subject to dripping water, dripping oil, etc., or to large amounts of dust, use a cover to protect the unit.
2. The product cannot be used when the media or ambient atmosphere contains any of the substances listed below.
   Organic solvents, phosphate ester type hydraulic oil, sulphur dioxide, chlorine gas, or acids, etc.

Criteria for selection

Select the cylinder bore according to the allowable load at the maximum cylinder operating speed.

<Precautions>
① Always use a speed controller for the cylinder, and control the speed to within a range of 100～500mm/s [3.9～19.7in./sec.].
② When a lateral (side) load is applied to the piston rod, select a bore size within the allowable lateral load range (see the graphs on p.821).

When the load has exceeded the allowable value during use, always install an external stopper (shock absorber, etc.) to prevent direct shocks to the cylinder.

<Precautions>
① For the external stopper (shock absorber, etc.), select a stopper with sufficient absorbing capacity.
② Consult us if the situation will not permit the installation of an external stopper.
③ When a lateral (side) load is applied to the piston rod, limit within the allowable lateral load range (see the graphs on p.821).

<Allowable load>

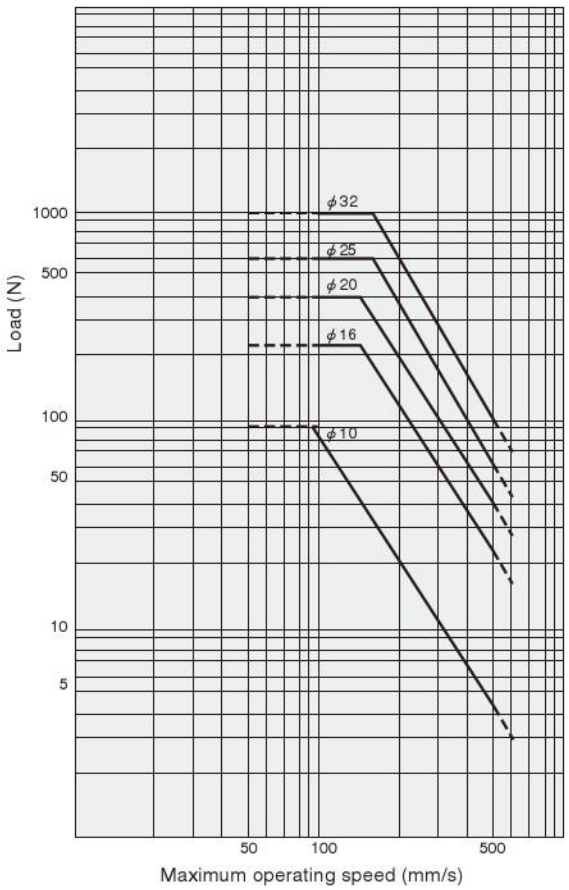

<How to read the graph>
When a 59N [13.2lb.] load is carried with φ20 [0.787in.], the maximum operating speed must be set to 400mm/s [15.7in./sec.] or less.

※ The maximum load in the graph is when air pressure of 0.7MPa [102psi.] is applied to the cylinder push side. The load will decrease in applications such as retracted side operations and lower air pressure applications.

1N = 0.2248lbf.
1mm/s = 0.0394in./sec.