

More precision



alpha series

We have added advanced positioning precision and high rigidity to the pneumatic actuator.

The Koganei Alpha Series further enhances the drive module concept, supporting superior applications and labor savings in FA line design and manufacturing with higher performance.


Systematic Handling Module

The handling module has mounting, turning, linear motion, positioning error correction, and gripping functions, which serve to shorten the design time regarding the material handling process, to reduce costs, and to deliver performance for the early set-up of automated lines.

Standardized modules

The handling operation is classified, standardized, and modularized into 7 functions.

As a result, designers can immediately complete the handling unit by combining modules organized by functions.

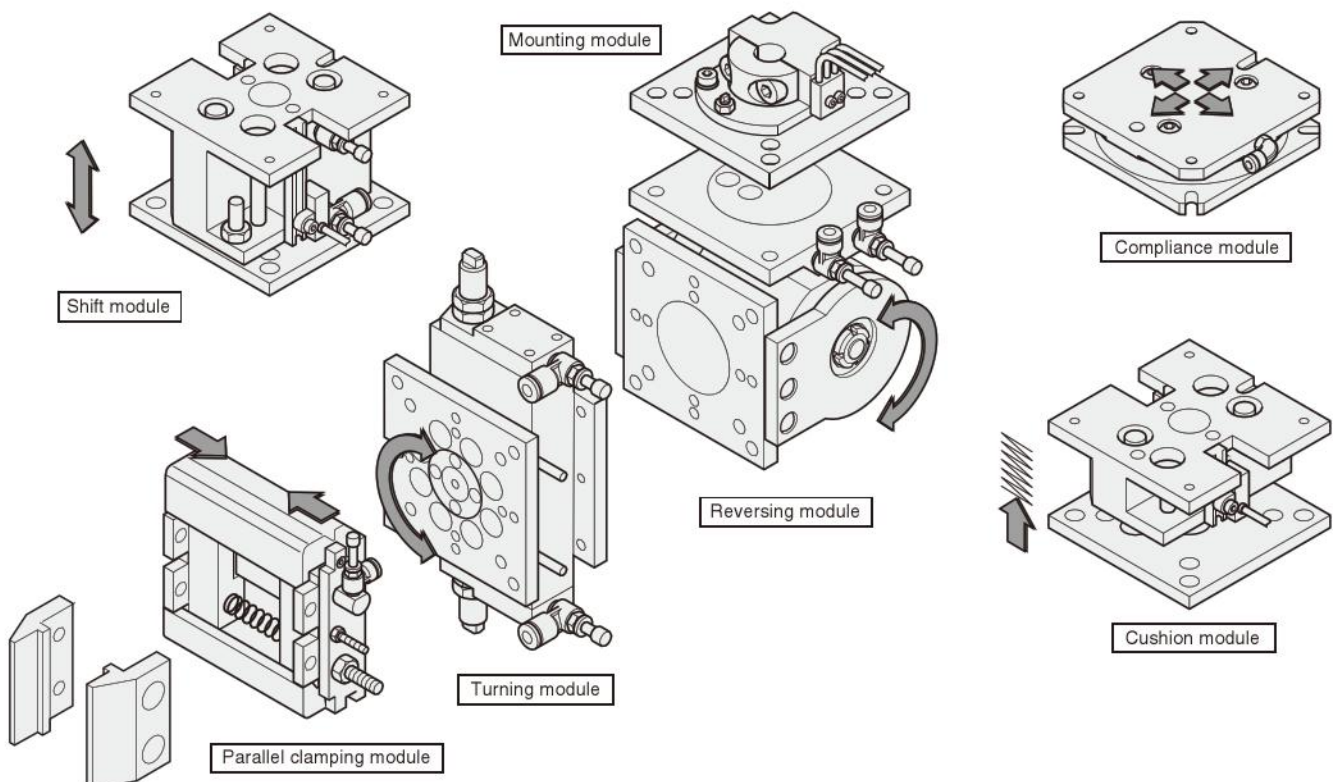


Assure high accuracy

High machining and assembly precision of the module ensure high accuracy in single-unit use or combination use.

Repeatability in each module	
Turning module	$\pm 0.03^\circ$
Reversing module	$\pm 0.03^\circ$
Shift module	$\pm 0.05\text{mm}$ [$\pm 0.0020\text{in.}$]
Cushion module	$\pm 0.05\text{mm}$ [$\pm 0.0020\text{in.}$]
Compliance module	$\pm 0.02\text{mm}$ [$\pm 0.0008\text{in.}$]
Parallel clamping module	$\pm 0.01\text{mm}$ [$\pm 0.0004\text{in.}$]

- Tolerance of the contact surface parallelism between mounting surface and mounted surface
= S : 0.04, M : 0.05, L : 0.06



- Tolerance of the coaxiality with the hypothetical center, as restricted by the locating pin = S : $\phi 0.04$, M : $\phi 0.05$, L : $\phi 0.06$


Commonality of mounting pitch

● Full choice mounting method

The Systematic Handling Module is a standard module that provides handling operations in the precision assembly field by 7 classified functions, for a complete series. Moreover, the module uses the full choice mounting method that makes any combinations possible while keeping the excellent positioning accuracy.

Features

- ① Common mounting dimensions for each size
- ② Bottom surfaces can be used to mount the same size or one smaller sized module.
- ③ To ensure accurate positioning of the handling modules, there are dowel pin holes on contacted surface of each modules, and locating pins are available (2 locating pins supplied with each module, with the exception of the parallel clamping module).

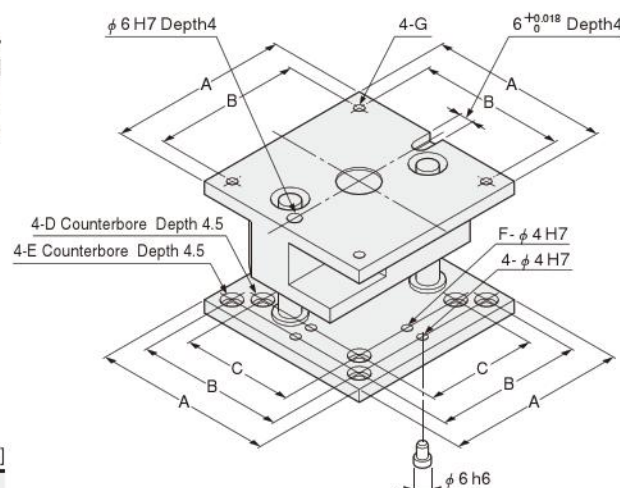

	mm [in.]						
	A	B	C	D	E	F	G
S size	60 [2.362]	50 [1.969]	—	—	M4	—	M4
M size	80 [3.150]	65 [2.559]	50 [1.969]	M4	M5	4 [0.157]	M5
L size	100 [3.937]	85 [3.346]	65 [2.559]	M4	M5	4 [0.157]	M5

Optimum load mass


For the Systematic Handling Module, use the load masses shown below as a guide.

S size 250g [8.82oz.]
M size 500g [17.64oz.]
L size 1000g [35.27oz.]

- To calculate the maximum load mass, use the formula below.

Robot load capacity	—	Hypothetical mass with all connected modules	—	Load ratio	=	Load mass
S size : 3kg [6.6lb.] M size : 6kg [13.2lb.] L size : 9kg [19.8lb.]		S size : 1.5kg [3.3lb.] M size : 3kg [6.6lb.] L size : 5kg [11.0lb.]				S size : 250g [8.82oz.] M size : 500g [17.64oz.] L size : 1000g [35.27oz.]

The leading runner on the automated line, the Handling Module
This will be the STANDARD from now on.

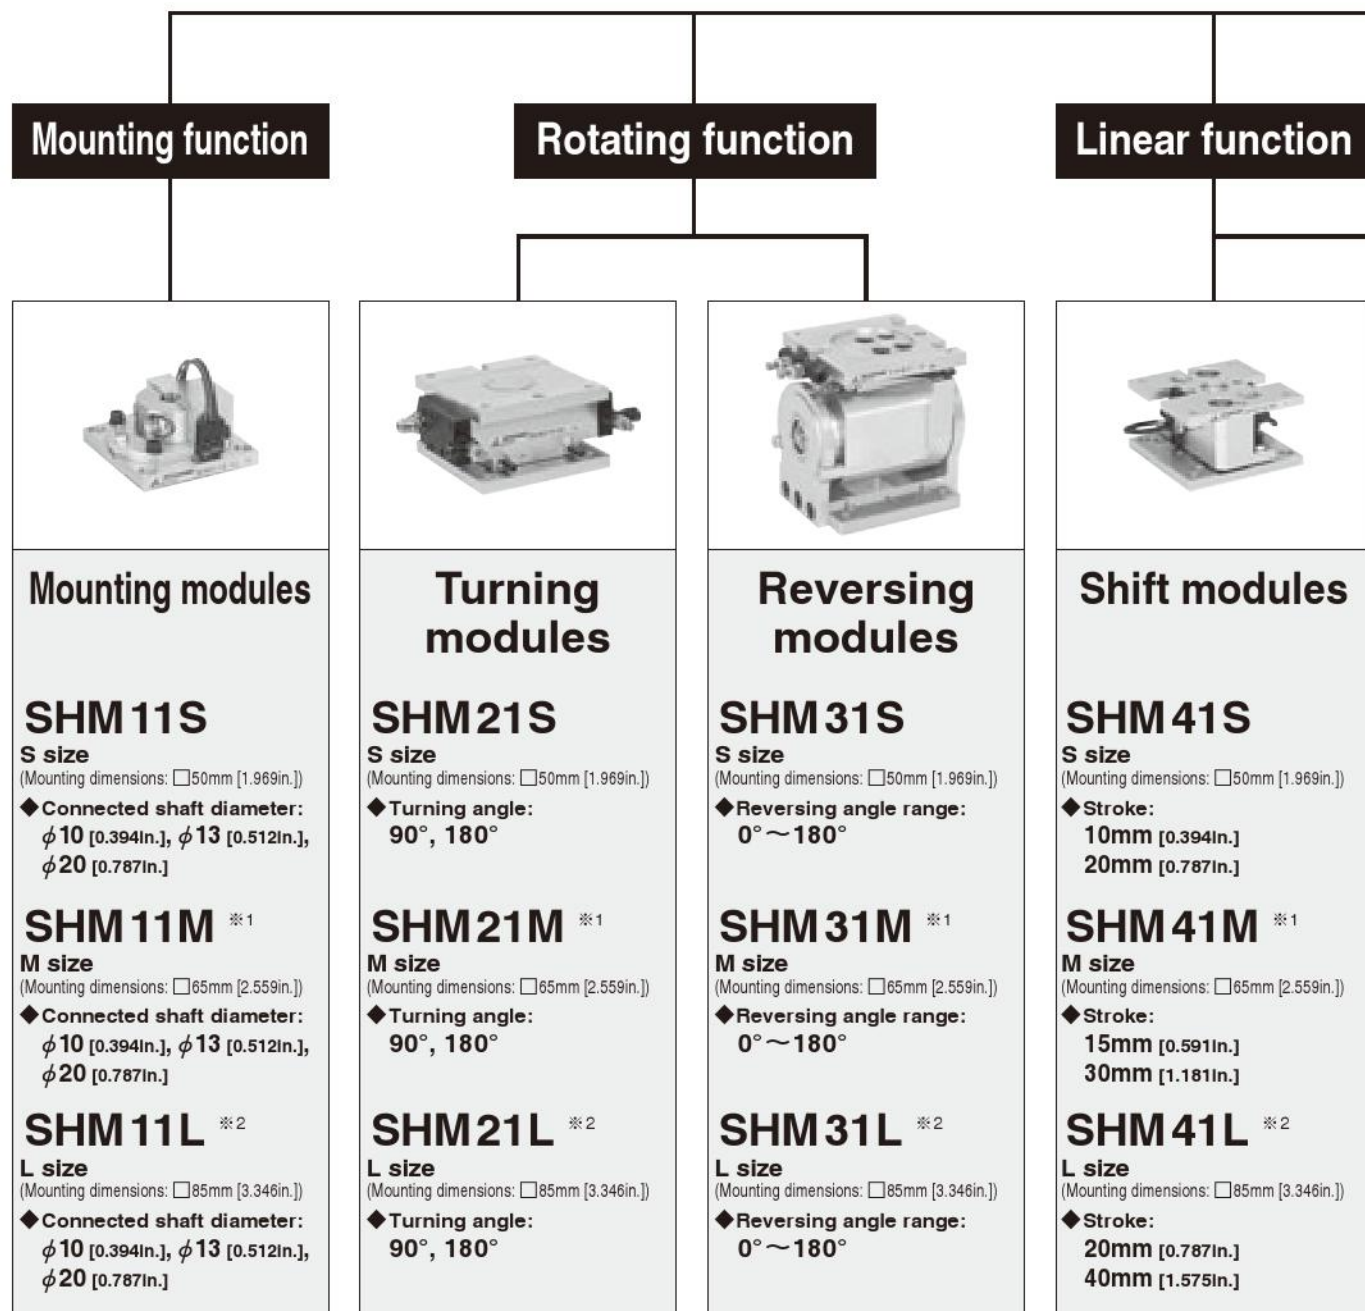

※1 : In addition to M size, S size mountings are also possible.

※2 : In addition to L size, M size mountings are also possible.

Systematic HandlingModule

Positioning error correction function

Gripping function



Cushion modules

SHM51S

S size

(Mounting dimensions: □50mm [1.969in.])

◆ **Stroke:**

5mm [0.197in.]

10mm [0.394in.]

SHM51M ※1

M size

(Mounting dimensions: □65mm [2.559in.])

◆ **Stroke:**

8mm [0.315in.]

15mm [0.591in.]

SHM51L ※2

L size

(Mounting dimensions: □85mm [3.346in.])

◆ **Stroke:**

10mm [0.394in.]

20mm [0.787in.]



Compliance modules

SHM61S, 62S

S size

(Mounting dimensions: □50mm [1.969in.])

SHM61M, 62M

M size

(Mounting dimensions: □65mm [2.559in.])

SHM61L, 62L

L size

(Mounting dimensions: □85mm [3.346in.])



Parallel clamping modules

SHM71S

S size

(Mounting dimensions: □50mm [1.969in.])

◆ **Gripping width:**

42mm [1.65in.]

SHM71M

M size

(Mounting dimensions: □65mm [2.559in.])

◆ **Gripping width:**

57mm [2.24in.]


SHM71L

L size

(Mounting dimensions: □85mm [3.346in.])

◆ **Gripping width:**

73mm [2.87in.]

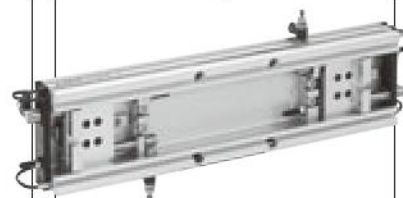

Parallel clamping long modules

SHM72S

S size

(Mounting dimensions: □50mm [1.969in.])

◆ **Gripping width:**

140, 240, 340mm

[5.51, 9.45, 13.39in.]

SHM72M

M size

(Mounting dimensions: □65mm [2.559in.])

◆ **Gripping width:**

176, 276, 376mm

[6.93, 10.87, 14.80in.]

SHM72L

L size

(Mounting dimensions: □85mm [3.346in.])


◆ **Gripping width:**

318, 418, 518mm

[12.52, 16.46, 20.39in.]

● SHM62 is NZ specification.
For details, see p.1521.

MOUNTING MODULES

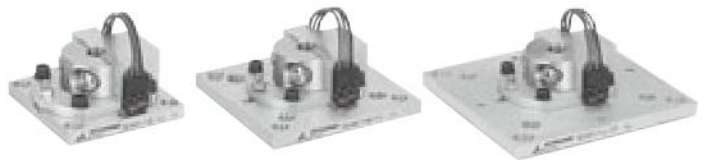

This module serves as the joint between the shaft end of the robot and the hand (gripper) unit.

● Shear bolt

Excessive force by a collision, etc., will break the shear bolt, separating the shaft holder and plate.

Note: Fasten the shear bolt to the tightening torque shown below.

Connected shaft diameter mm [in.]	Tightening torque
φ 10 [0.394]	31.4N·cm [2.78in·lbf]
φ 13 [0.512]	63.47N·cm [5.62in·lbf]
φ 20 [0.787]	107.9N·cm [9.55in·lbf]

● Plate

● Angle adjusting screw

Loosening the shear bolt and rotating the adjusting screw clockwise or counterclockwise allows the mounting angle of the plate to be adjusted within a range of $\pm 1^\circ$.

● Shaft holder

● Locating hole

Secures the module accurately onto the spline groove of the shaft.

● Falling detection sensor

Detects the falling of a plate due to breaking of the shear bolt.

Normally ON (OFF when falling)

Black wire — Blue wire
Red wire

● Locating pin

(Apply locking adhesive and insert it into the required hole.)

● Falling prevention stopper

Prevents the plate from falling completely.



Specifications

Model		SHM11S			SHM11M			SHM11L		
Item										
Mounting specification	Connected shaft diameter ^{Note1} mm [in.]	10 [0.394]	13 [0.512]	20 [0.787]	10 [0.394]	13 [0.512]	20 [0.787]	10 [0.394]	13 [0.512]	20 [0.787]
	Mounted surface	S			M or S ^{Note2}			L or M ^{Note3}		
Operating temperature range °C [°F]		0 ~ 60 [32 ~ 140]								
Lubrication		Not required								
Range of mounting adjustment angle		± 1°								
Sensor switch		Falling detection X1 (OMRON : D2JW-011-MD)								
Mass	g [oz.]	200 [7.1]	190 [6.7]	210 [7.4]	250 [8.8]	240 [8.5]	260 [9.2]	320 [11.3]	310 [10.9]	330 [11.6]

Notes: 1. Consult us for sizes other than the shaft diameters shown in the table.

2. Both M and S sizes can be mounted on SHM11M.

3. Both L and M sizes can be mounted on SHM11L.

Order Codes

SHM 11 —

Connected shaft diameter

10 : φ 10 [0.394in.]

13 : φ 13 [0.512in.]

20 : φ 20 [0.787in.]

Mounting specification

S : Mounting pitch 50mm [1.969in.]

M : Mounting pitch 65mm [2.559in.]

L : Mounting pitch 85mm [3.346in.]

Module

Mounting module

Alpha series
systematic handling module


※ Two locating pins are included.

Dimensions of SHM11S, M, L (mm)



SHM11 Mounting specification


Connected shaft diameter

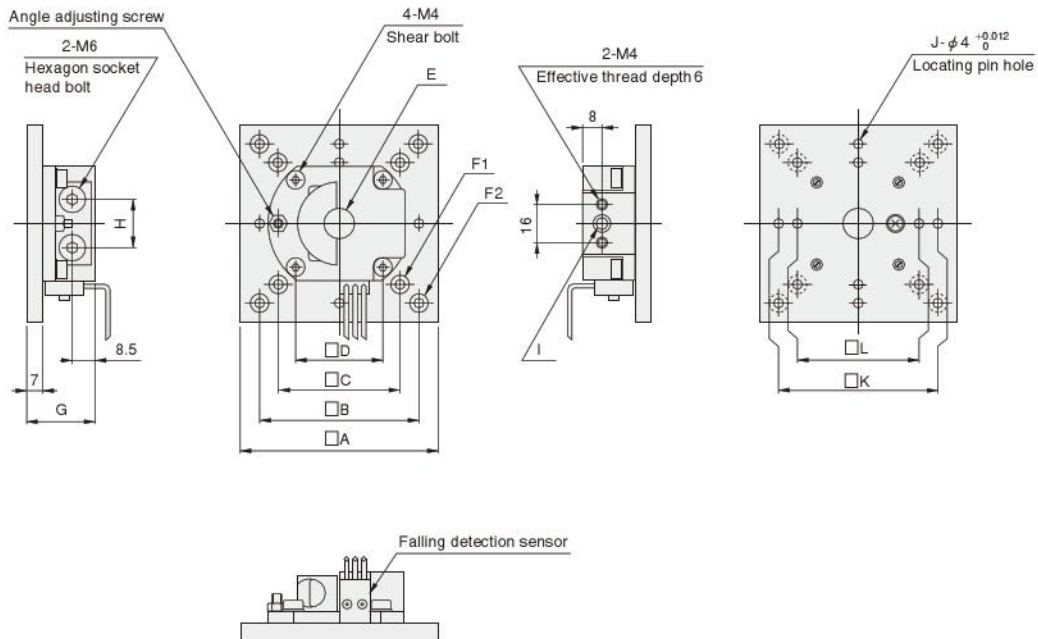

Remarks: 1. Perpendicularity tolerance between the connected shaft center and mounted surface is 0.05.
2. Coaxiality tolerance between the hypothetical center and the mounted shaft center, as restricted by the locating pin = S : $\phi 0.04$, M : $\phi 0.05$, L : $\phi 0.06$

Code	A	B	C	D	E	F1	F2	G	H	I	J	K	L
Model													
SHM11S-10	60	50	—	36	$\phi 10 \begin{smallmatrix} +0.015 \\ 0 \end{smallmatrix}$	—	4- $\phi 4.5$ 4- $\phi 8$ Counterbore Depth 4.4	28	20	$\phi 4 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)	4	50 ± 0.03	—
SHM11S-13					$\phi 13 \begin{smallmatrix} +0.018 \\ 0 \end{smallmatrix}$					$\phi 5 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)			
SHM11S-20					$\phi 20 \begin{smallmatrix} +0.021 \\ 0 \end{smallmatrix}$					$\phi 6 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)			
SHM11M-10	80	65	50	36	$\phi 10 \begin{smallmatrix} +0.015 \\ 0 \end{smallmatrix}$	4- $\phi 4.5$ 4- $\phi 8$ Counterbore Depth 4.4	4- $\phi 5.5$ 4- $\phi 9.5$ Counterbore Depth 3.5	28	20	$\phi 4 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)	8	65 ± 0.03	50 ± 0.03
SHM11M-13					$\phi 13 \begin{smallmatrix} +0.018 \\ 0 \end{smallmatrix}$					$\phi 5 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)			
SHM11M-20					$\phi 20 \begin{smallmatrix} +0.021 \\ 0 \end{smallmatrix}$					$\phi 6 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)			
SHM11L-10	100	85	65	36	$\phi 10 \begin{smallmatrix} +0.015 \\ 0 \end{smallmatrix}$	4- $\phi 4.5$ 4- $\phi 8$ Counterbore Depth 4.4	4- $\phi 5.5$ 4- $\phi 9.5$ Counterbore Depth 3.5	28	20	$\phi 4 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)	8	85 ± 0.05	65 ± 0.03
SHM11L-13					$\phi 13 \begin{smallmatrix} +0.018 \\ 0 \end{smallmatrix}$					$\phi 5 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)			
SHM11L-20					$\phi 20 \begin{smallmatrix} +0.021 \\ 0 \end{smallmatrix}$					$\phi 6 \begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$ (Opening $\phi 6$ Depth 10)			

TURNING MODULES

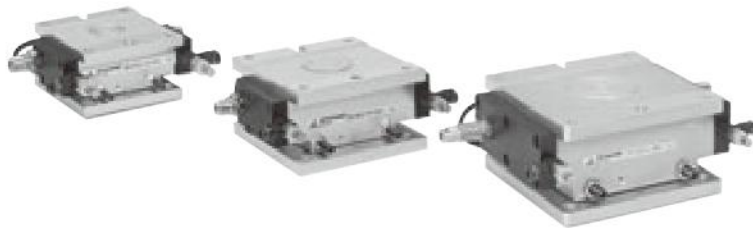

The module turns hand (gripper) units within ranges of -5° to 95° , or -5° to 185° .

● Locating pin

(Apply locking adhesive and insert it into the required hole.)

● Turning angle

The stopper and angle adjusting screw enable to set the turning angle anywhere within the range.

● Turning table

● Stopper

Note: Change the threaded location to align with the set turning angle. (Apply locking adhesive to tighten for locking.)

● Turning angle adjusting screw

Note: Although it is possible to use a turning angle adjusting screw for adjustment, always use a shock absorber at the swing end. Moreover, the range for turning angle adjustment is limited. For details, see p.1512.

● Main shaft

● Bearing

● Shock absorber

(Screw it in as far as the turning angle set position, and then return one-half rotation and secure it in place.)

● Piston

● Speed controller with quick fitting

The turning speed can be adjusted. (Be aware to avoid exceeding the operating speed range.)

Note: Since loosening the connection screws will go out of the assembly precision, do not disassemble.

Specifications

Model		SHM 21S		SHM 21M		SHM 21L	
		NA	MA	NA	MA	NA	MA
Mounting specification	Mounting surface	S		M		L	
	Mounted surface	S		M or S ^{Note1}		L or M ^{Note2}	
Media		Air					
Operating pressure range MPa [psi.]		0.2~0.6 [29~87]					
Proof pressure MPa [psi.]		1 [145]					
Operating temperature range °C [°F]		0~60 [32~140]					
Operation type and mechanism		Double acting type, rack & pinion drive, with shock absorber ^{Note3} , with turning angle adjusting mechanism					
Lubrication		Not required					
Turning angle range ^{Note4}		-5°~95°	-5°~185°	-5°~95°	-5°~185°	-5°~95°	-5°~185°
Effective torque ^{Note5} N·cm [in·lbf]		46.5 [4.1]		127.5 [11.3]		303 [26.8]	
Shock absorber		KSHA6 X5-D		KSHA6 X5-DE		KSHA6 X8-F	
Allowable energy J [ft·lbf]		0.67 [0.49]		1.03 [0.76]		2.06 [1.52]	
Allowable moment N·cm [in·lbf]		60 [5.3]		120 [10.6]		240 [21.2]	
Allowable thrust load N [lbf.]		60 [13.5]		130 [29.2]		200 [45.0]	
Turning angle repeatability		±0.03°					
Operating speed range Degrees/s		40~320					
Sensor switches		Operation detection X2					
Mass g [oz.]		300 [10.6]	330 [11.6]	630 [22.2]	690 [24.3]	1300 [45.9]	1500 [52.9]

Notes: 1. Both M and S sizes can be mounted on SHM21M.

2. Both L and M sizes can be mounted on SHM21L.

3. Set the shock absorber at a one-half rotation returned position from the turning angle set position.

4. Use the stopper and angle adjusting screw to set the turning angle anywhere within the range.

5. Values at 0.5MPa [73psi.] air pressure.

Order Codes

SHM	21					
Module Turning module		Turning angle range		Lead wire length		
		NA : $-5^{\circ} \sim 95^{\circ}$ MA : $-5^{\circ} \sim 185^{\circ}$		A : 1000mm [39in.] B : 3000mm [118in.]		
Alpha series systematic handling module		Mounting specification		Number of sensor switches		
		S : Mounting pitch 50mm [1.969in.] M : Mounting pitch 65mm [2.559in.] L : Mounting pitch 85mm [3.346in.]		1 : With 1 sensor switch 2 : With 2 sensor switches		
Sensor switch		ZC130 : Solid state type 2-lead wire with indicator lamp		DC10 ~ 28V		
		ZC153 : Solid state type 3-lead wire with indicator lamp		DC4.5 ~ 28V		
Sensor switch holder (with screw)		Blank : No holder		SHM21 : With holder for turning module		
		SHM21 : With holder for turning module				

Order codes for sensor switches only


Lead wire length	Sensor switch holder (with screw)
A : 1000mm [39in.] B : 3000mm [118in.]	Blank : No holder SHM21 : With holder for turning module
Sensor switch	
ZC130 : Solid state type 2-lead wire with indicator lamp	
ZC153 : Solid state type 3-lead wire with indicator lamp	
DC10 ~ 28V	
DC4.5 ~ 28V	

● For details of sensor switches, see p.1544.

Dimensions of SHM21S, M, L (mm)



SHM21 Mounting specification Range of turning angle adjustment

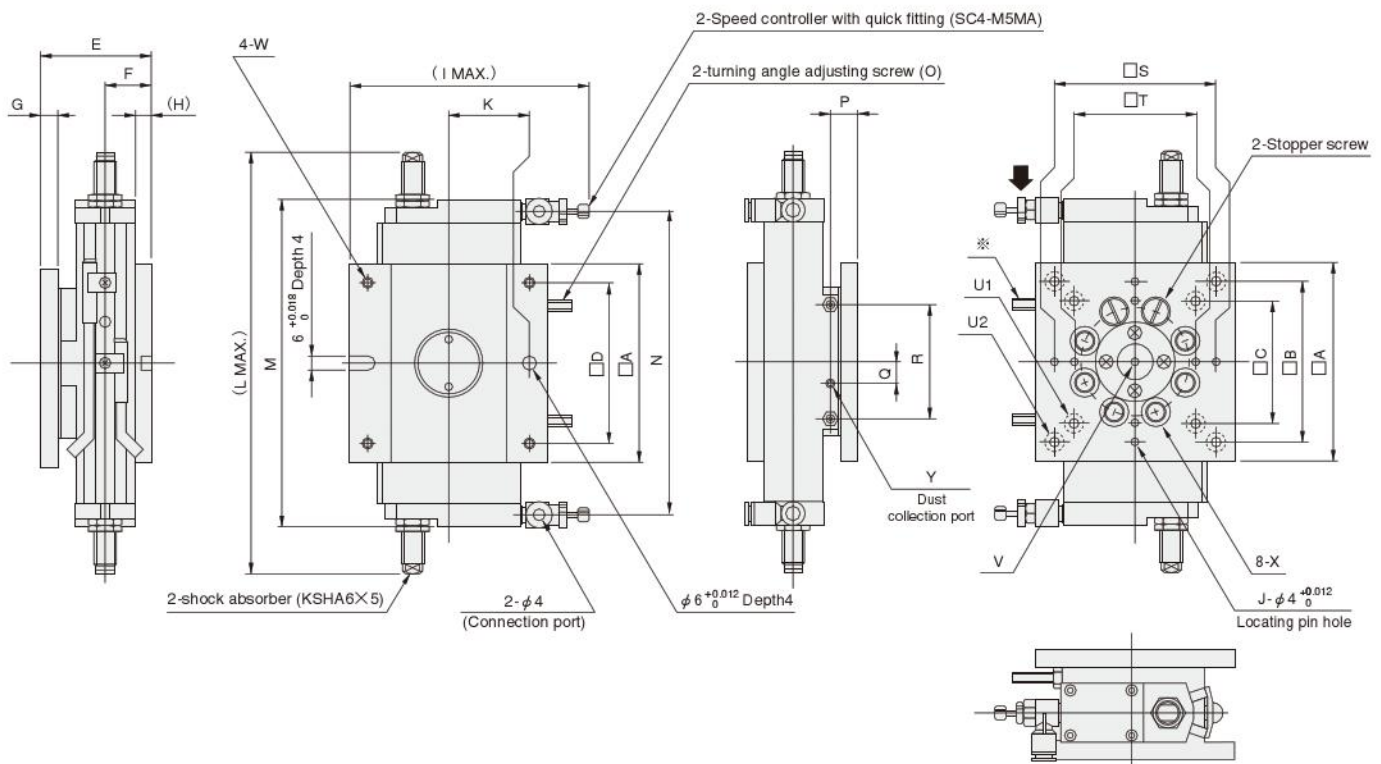


- Remarks: 1. Tolerance of the contact surface parallelism between mounting surface and mounted surface = S : 0.04, M : 0.05, L : 0.06
 2. Coaxiality tolerance between the hypothetical turning center, as restricted by the locating pin, and the actual turning center = S : ϕ 0.04, M : ϕ 0.05, L : ϕ 0.06

In the drawing above, air is supplied from the fitting marked arrow $\rightarrow$ to rotate the turning table in a counterclockwise direction and bring it into contact with the adjusting screw marked with * as the 0° state.

Code		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U1	U2	V	W	X	Y
Model																											
SHM 21S-NA	60	50	—	50	35	14.5	6	5.5	83	4	25.0	110	79	70	M3	9.5	6	32	50±0.03	—	—	4-φ 4.5 4-φ 8 Counterbore Depth 4.4 (from the back side)	φ 3 +0.012 0	M4	M8×1	M3	
SHM 21S-MA												130	99	90													
SHM 21M-NA	80	65	50	65	45	19.0	7	7.0	96	8	32.5	140	99	90	M4	11.5	8	46	65±0.03	50±0.03	4-φ 4.5 4-φ 8 Counterbore Depth 4.4 (from the back side)	φ 4 +0.012 0	M4	M8×1	M3		
SHM 21M-MA												170	131	122													
SHM 21L-NA	100	85	65	85	55	21.5	8	8.0	120	8	42.5	177	120	110	M6	15.0	10	58	85±0.05	65±0.03	4-φ 5.5 4-φ 9.5 Counterbore Depth 4.4 (from the back side)	φ 4 +0.012 0	M5	M10×1	M5		
SHM 21L-MA												228	171	161													


Allowable thrust load and allowable moment

Do not apply either the thrust load (W) or moment ($M=F \times L$) exceeding the allowable values listed on p.1511.

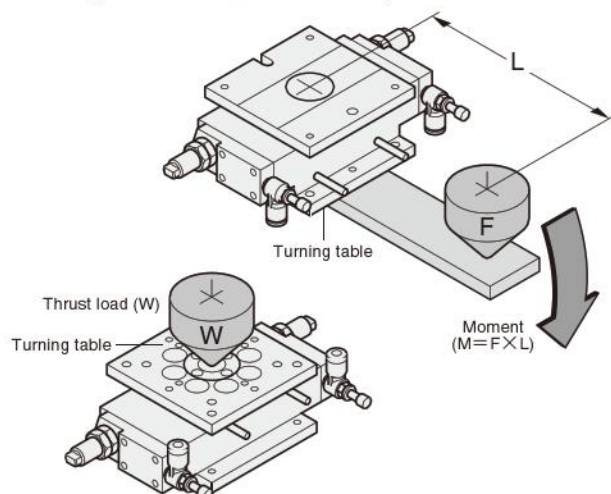


Range of turning angle adjustment

180° turning angle MA type

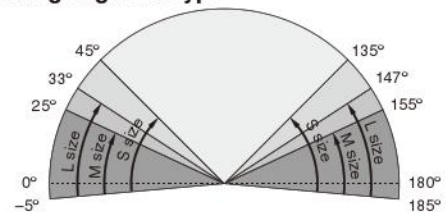

90° turning angle NA type



The arrows $\rightarrow$ show the range of turning angle adjustment by changing the shock absorbers' mounting positions. For adjustment other than that shown above, consult us.

REVERSING MODULES



The module reverses the hand (gripper) unit within a range of 0° to 180°.

● Shock absorber

(Used also as the reversing angle adjusting screw.)
Screw in the shock absorber up to the set reversing angle adjusting position.

● Angular bearing

(One bearing is arranged on each end)

● Reversing shaft

(Vane rod)

● Stopper

Change the screwed position to align with the set reversing angle.
(Apply locking adhesive to tighten for locking.)

● Speed controller with quick fitting

The reversing speed can be adjusted.
(Be aware to avoid exceeding the operating speed range.)

● Magnet holder

Loosening the M3 setscrew allows the plate to move in a circumferential direction.
Adjust the mounting position so that the sensor switch operates at a required position.

● Reversing body

(Vane type rotary actuator)

Note: Since loosening the connection screws will go out of the assembly precision, do not disassemble.

Specifications


Model		SHM31S	SHM31M	SHM31L
Mounting specification	Mounting surface	S	M	L
	Mounted surface	S	M or S ^{Note1}	L or M ^{Note2}
Media		Air		
Operating pressure range		MPa [psi.] 0.2~0.6 [29~87]		
Proof pressure		MPa [psi.] 1 [145]		
Operating temperature range		°C [°F] 0~60 [32~140]		
Operation type and mechanism		Double acting type, vane drive, with shock absorber, with reversing angle adjusting mechanism		
Lubrication		Not required		
Reversing angle range		0°~180°		
Adjusting angle range		0°~180°		
Effective torque ^{Note3}		N·cm [in·lbf] 74 [6.5]	294 [26.0]	490 [43.4]
Shock absorber		KSHAH6×3	KSHAH6×4	KSHAH6×5
Allowable moment		N·cm [in·lbf] 60 [5.3]	120 [10.6]	240 [21.2]
Allowable energy		J [ft·lbf] 0.25 [0.18]	0.88 [0.65]	1.39 [1.03]
Turning angle repeatability		±0.03°		
Operating speed range		Degrees/s 60~180		
Sensor switches		Operation detection X2		
Mass		g [oz.] 440 [15.5]	960 [33.9]	1880 [66.3]

Notes: 1. Both M and S sizes can be mounted on SHM31M.


2. Both L and M sizes can be mounted on SHM31L.

3. Values at 0.5MPa [73psi.] air pressure. The recommended torque for operation is about 50% of the effective torque.

Order Codes

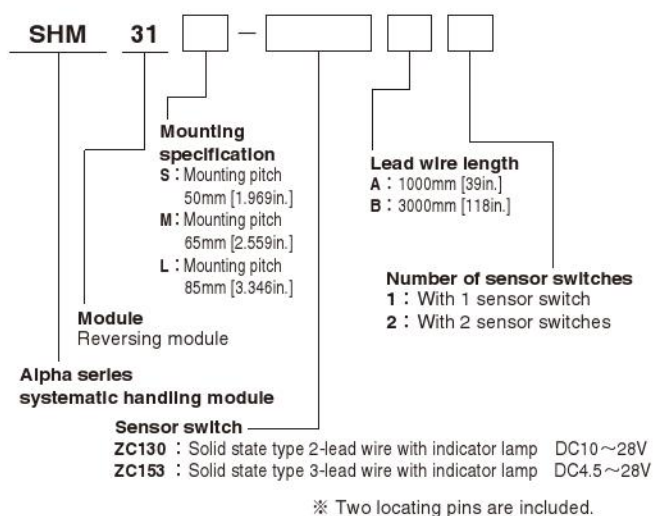


Order codes for sensor switches only

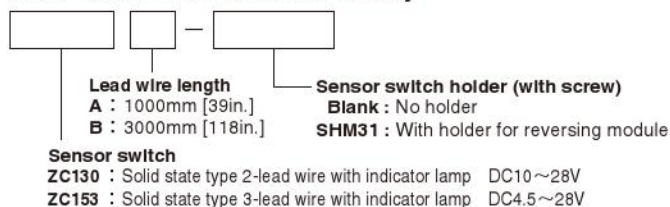

● For details of sensor switches, see p.1544.

Dimensions of SHM31S, M, L (mm)

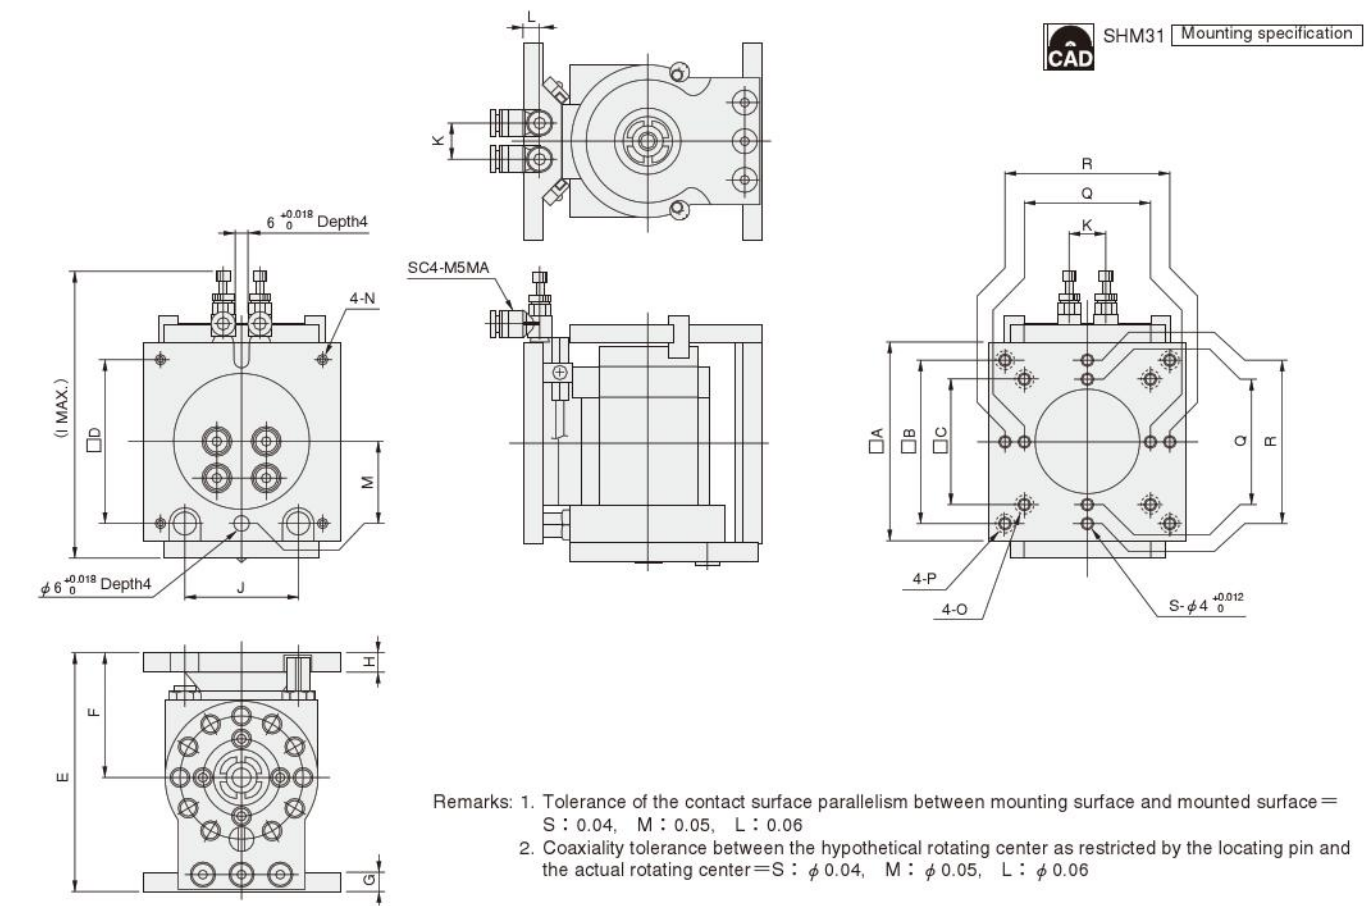

Code	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
Model																			
SHM31S	60	50	—	50	75	40	6	6	96	29	13	7	25.0	M4	—	φ4.5, φ8 Counterbore Depth 4.5	—	50±0.03	4
SHM31M	80	65	50	65	95	50	7	7	117	46	15	7	32.5	M4	φ4.5, φ8 Counterbore Depth 4.4	φ4.5, φ8 Counterbore Depth 4.5	50±0.03	65±0.03	8
SHM31L	100	85	65	85	115	60	8	8	138	51	20	7	42.5	M5	φ4.5, φ8 Counterbore Depth 4.4	φ5.5, φ9.5 Counterbore Depth 5.4	65±0.03	85±0.05	8

Internal Capacity and Air Consumption

Internal capacity

SHM31S : 9cm³ [0.55in.³]

SHM31M : 43cm³ [2.62in.³]

SHM31L : 75cm³ [4.58in.³]

$$\text{Air consumption } Q = v \cdot \frac{(P_1 + 1.033)}{1.033} \cdot n$$

Q : Air consumption cc (cm³)/min (ANR)

v : Internal capacity of reversing module cc (cm³)

n : Operating frequency times/min

P₁ : Pressure kgf/cm²

$$\text{Air consumption } Q' = v' \cdot \frac{(P'_1 + 14.696)}{14.696} \cdot n$$

Q' : Air consumption in.³/min. (ANR)*

v' : Internal capacity of reversing module in.³


n : Operating frequency times/min.

P'₁ : Pressure psi.

※Refer to p.54 for an explanation of ANR.


Allowable Moment

Do not apply the moment (M=F×L) exceeding the allowable values listed on p.1513.

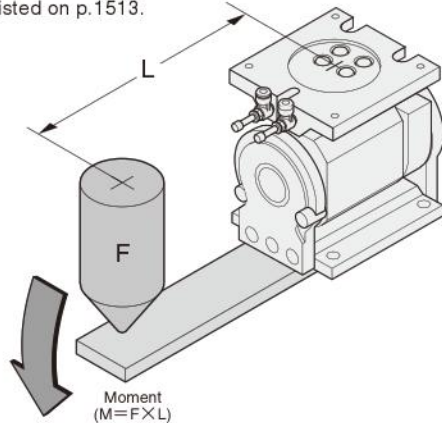

Mounting Sensor Switch


Mount the sensor switch laterally in the sensor holder so that the model marking surface faces upward, as shown below.

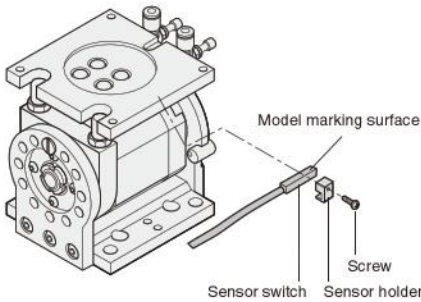

SHIFT MODULES



The module to shift the vertical position of the hand (gripper) unit within a predetermined range. Suitable for constant-force insertion. Can also be used as a lifter.

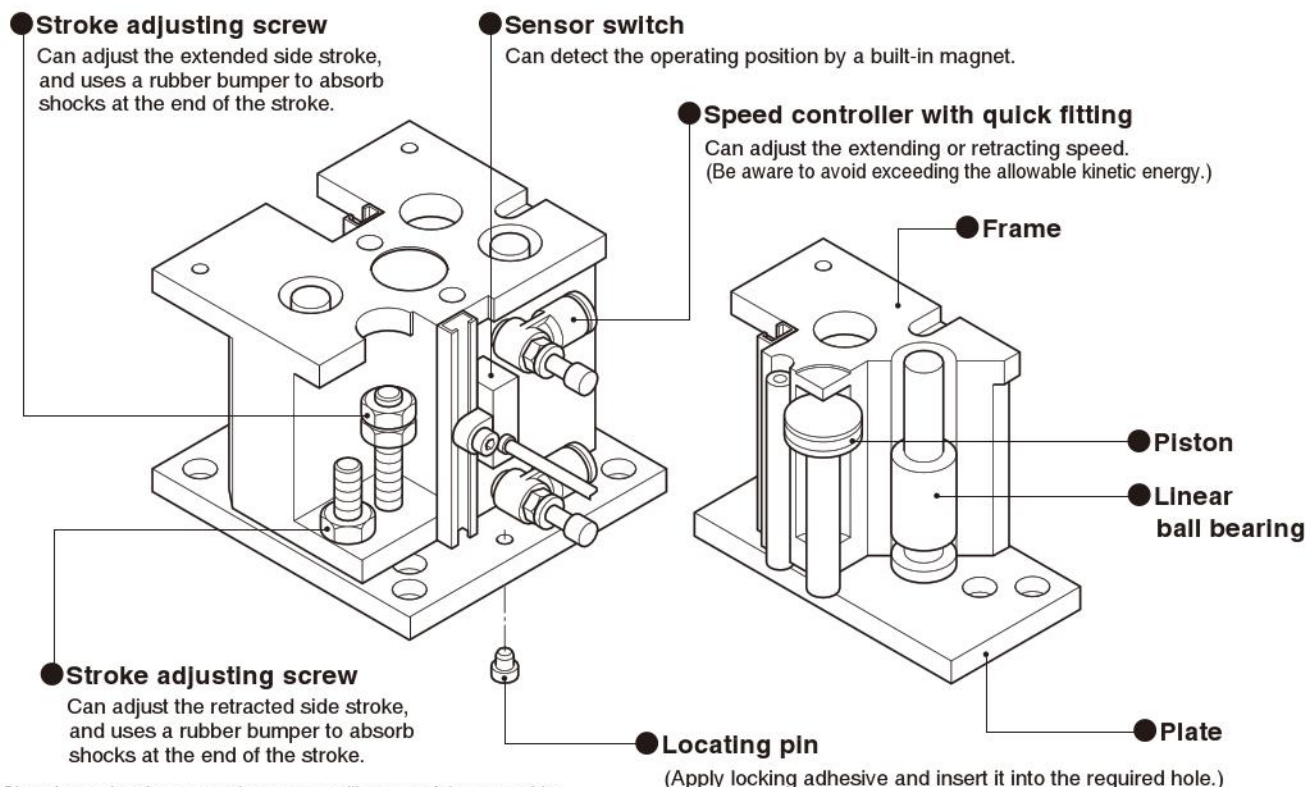

Note: Since loosening the connection screws will go out of the assembly precision, do not disassemble.

Specifications

Model		SHM41S		SHM41M		SHM41L	
		MS	LS	MS	LS	MS	LS
Mounting specification	Mounting surface	S		M		L	
	Mounted surface	S		M or S ^{Note1}		L or M ^{Note2}	
Cylinder bore size mm [in.]		12 [0.472]		16 [0.630]		20 [0.787]	
Stroke mm [in.]		10 [0.394]	20 [0.787]	15 [0.591]	30 [1.181]	20 [0.787]	40 [1.575]
Media		Air					
Operating pressure range MPa [psi.]		0.2~0.6 [29~87]					
Proof pressure MPa [psi.]		1 [145]					
Operating temperature range °C [°F]		0~60 [32~140]					
Operation type and mechanism		Double acting type, linear ball bearing, with stroke adjusting mechanism (bumper)					
Lubrication		Not required					
Cylinder thrust ^{Note3} N [lbf.]	Extended side	56.5 [12.7]		100.5 [22.6]		157.1 [35.3]	
	Retracted side	42.4 [9.5]		86.4 [19.4]		131.9 [29.7]	
Allowable kinetic energy J [ft·lbf]		0.03 [0.02]		0.06 [0.04]		0.08 [0.06]	
Allowable moment N·cm [in·lbf]		30 [2.7]		40 [3.5]		80 [7.1]	
Operating speed range mm/s [in./sec.]		30~300 [1.2~11.8]					
Repeatability mm [in.]		±0.05 [±0.0020]					
Sensor switches		Operation detection×2					
Mass	g [oz.]	280 [9.9]	320 [11.3]	480 [16.9]	550 [19.4]	790 [27.9]	980 [34.6]

Notes: 1. Both M and S sizes can be mounted on SHM41M.
2. Both L and M sizes can be mounted on SHM41L.
3. Values at 0.5MPa [73psi.] air pressure.

Order Codes

SHM 41 - -

Stroke mm

Mounting spec.	S	M	L
MS	10	15	20
LS	20	30	40

Lead wire length
A : 1000mm [39in.]
B : 3000mm [118in.]

Number of sensor switches
1 : With 1 sensor switch
2 : With 2 sensor switches

Module
Shift module

Alpha series systematic handling module

Sensor switch
CS9H : Solid state type 3-lead wire with indicator lamp DC4~28V
ZB430 : Solid state type 2-lead wire with indicator lamp DC10~28V

※ Two locating pins are included.

Order codes for sensor switches only (with holder)



- SHM41

Lead wire length
A : 1000mm [39in.]
B : 3000mm [118in.]

Sensor switch
CS9H : Solid state type 3-lead wire with indicator lamp DC4~28V
ZB430 : Solid state type 2-lead wire with indicator lamp DC10~28V

● For details of sensor switches, see p.1544.

Dimensions of SHM41S, M, L (mm)

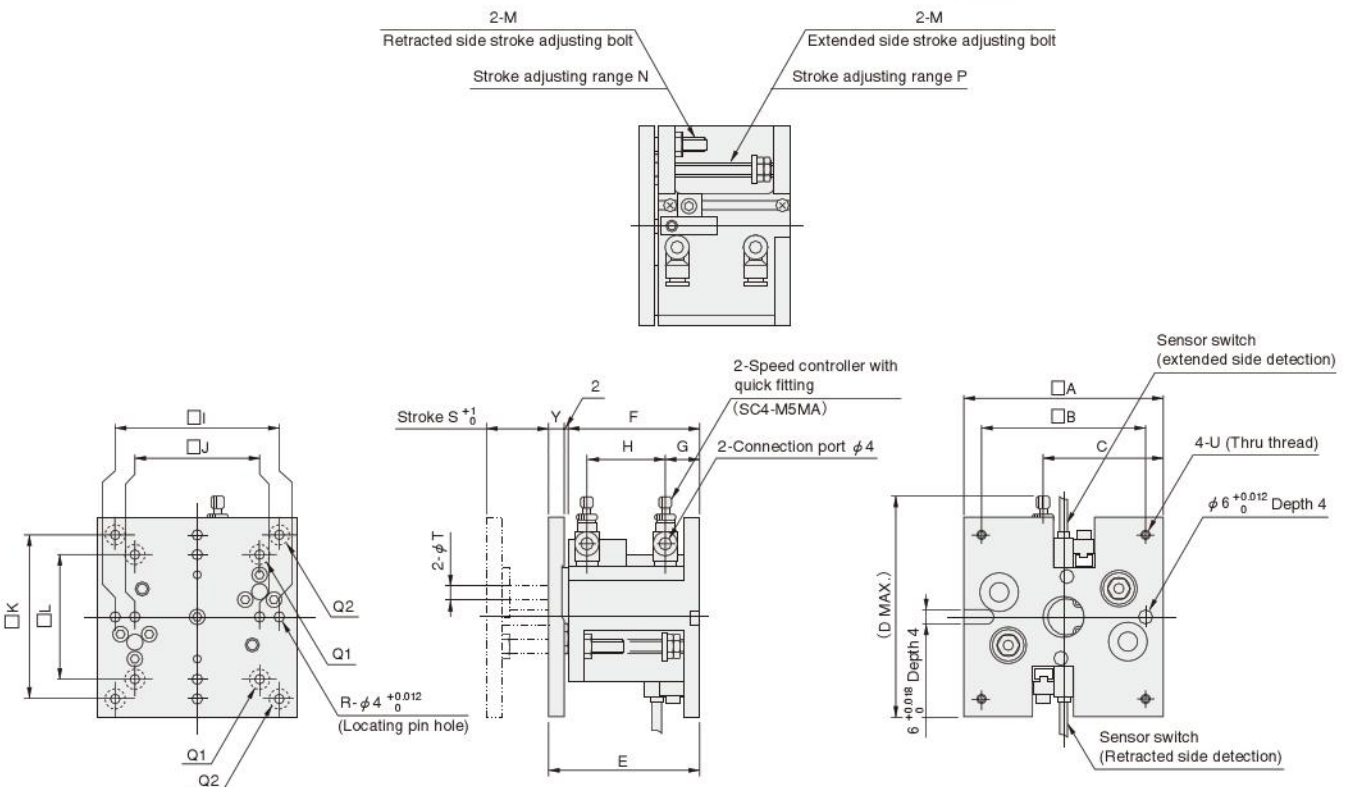


Remarks: 1. Tolerance of the contact surface parallelism between mounting surface and mounted surface = S : 0.04, M : 0.05, L : 0.06
2. Coaxiality tolerance with the rotating center, as restricted by the locating pin = S : ϕ 0.04, M : ϕ 0.05, L : ϕ 0.06

Code Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P ^{Note}	Q1	Q2	R	S	T	U	X	Y	
SHM41S-MS	60	50	37	78	35	27	12	10.5	50±0.03	—	50	—	M4	2	10	—	4-φ 4.5 4-φ 8 Counterbore Depth 4.4 (from the back side)	4	10	8	M4	3	6	
SHM41S-LS					45	37		20.5						5	20				20			12		
SHM41M-MS	80	65	48	88	45	37	13	16.5	65±0.03	50±0.03	65	50	M5	5	15	4-φ 4.5 4-φ 8 Counterbore Depth 4.4 (from the back side)		8	15	8		M5	7	6
SHM41M-LS					60	52		31.5						9	30				30				24	
SHM41L-MS	100	85	59	102	50	41	15	18.7	85±0.05	65±0.03	85	65	M6	3	20	4-φ 5.5 4-φ 9.5 Counterbore Depth 5.4 (from the back side)	8	20	10	M5	15		7	
SHM41L-LS					70	61		38.7						7	40			40			26			


Note: The sensor moving range, however, is Xmm beyond the end of extended side stroke.

Allowable Moment

Do not apply the moment (M=F×L) exceeding the allowable values listed on p.1515.

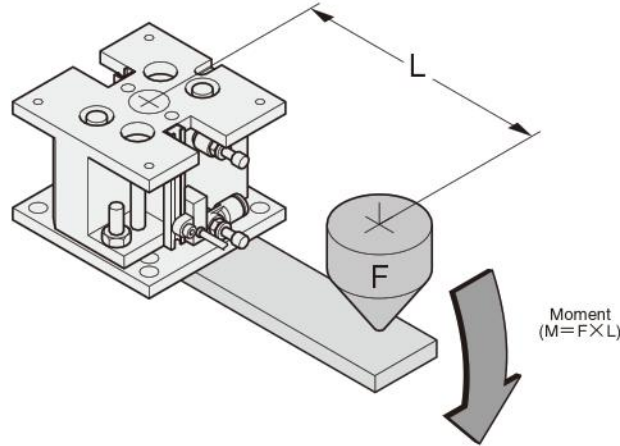

CUSHION MODULES

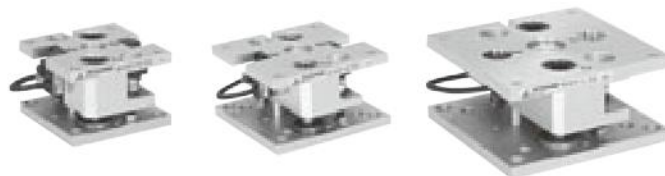

The module for protecting the workpieces. Can use an adjustable spring force for snap insertions.

Stroke adjusting screw


Can adjust the extended side stroke, and uses a rubber bumper to absorb shocks at the end of the stroke.

Sensor switch

Can detect the operating position by a built-in magnet.

Cushion force adjusting mechanism

By detaching the snap ring and changing the cover position, the cushioning force can be adjusted in 4 levels.

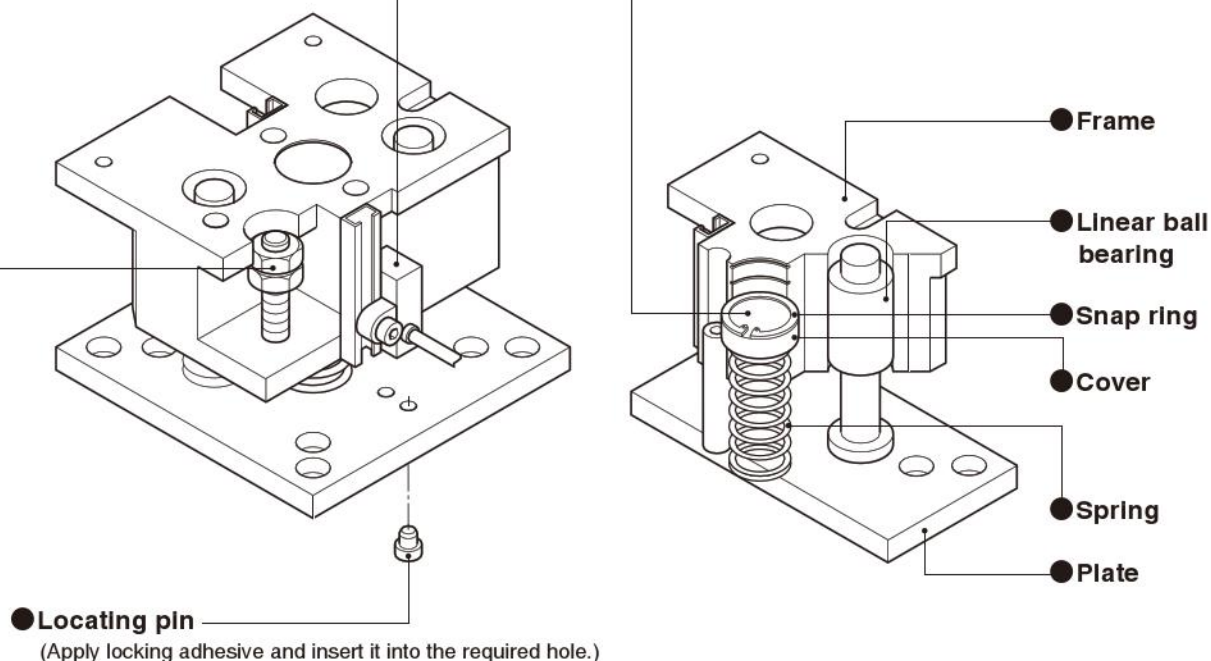

Note: Since loosening the connection screws will go out of the assembly precision, do not disassemble.


Specifications

Model		SHM51S		SHM51M		SHM51L	
		SS	MS	SS	MS	SS	MS
Mounting specification	Mounting surface	S		M		L	
	Mounted surface	S		M or S ^{Note 1}		L or M ^{Note 2}	
Stroke mm [in.]		5 [0.197]	10 [0.394]	8 [0.315]	15 [0.591]	10 [0.394]	20 [0.787]
Operating temperature range °C [°F]		0 ~ 60 [32 ~ 140]					
Operation type and mechanism		Spring return, linear ball bearing, with stroke adjusting mechanism (bumper)					
Lubrication		Not required					
Cylinder thrust N [lbf.]	Extended side	3 ~ 12 [0.7 ~ 2.7]		4 ~ 16 [0.9 ~ 3.6]		4 ~ 16 [0.9 ~ 3.6]	
	Retracted side	—		—		—	
Allowable moment N·cm [in·lbf]		30 [2.7]		40 [3.5]		80 [7.1]	
Repeatability mm [in.]		± 0.05 [± 0.0020]					
Sensor switches		Operation detection X2					
Mass g [oz.]		250 [8.8]	280 [9.9]	380 [13.4]	430 [15.2]	720 [25.4]	810 [28.6]


Notes 1: Both M and S sizes can be mounted on SHM51M.

2: Both L and M sizes can be mounted on SHM51L.

Order Codes

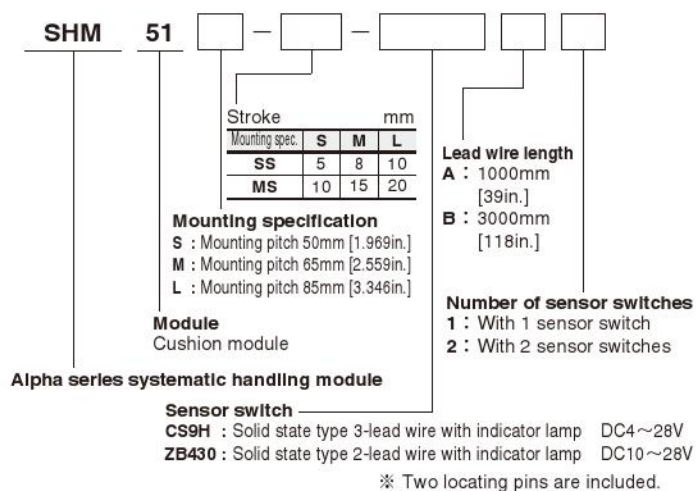

Order codes for sensor switches only (with holder)




Sensor switch

CS9H : Solid state type 3-lead wire with indicator lamp DC4~28V

ZB430 : Solid state type 2-lead wire with indicator lamp DC10~28V

● For details of sensor switches, see p.1544.

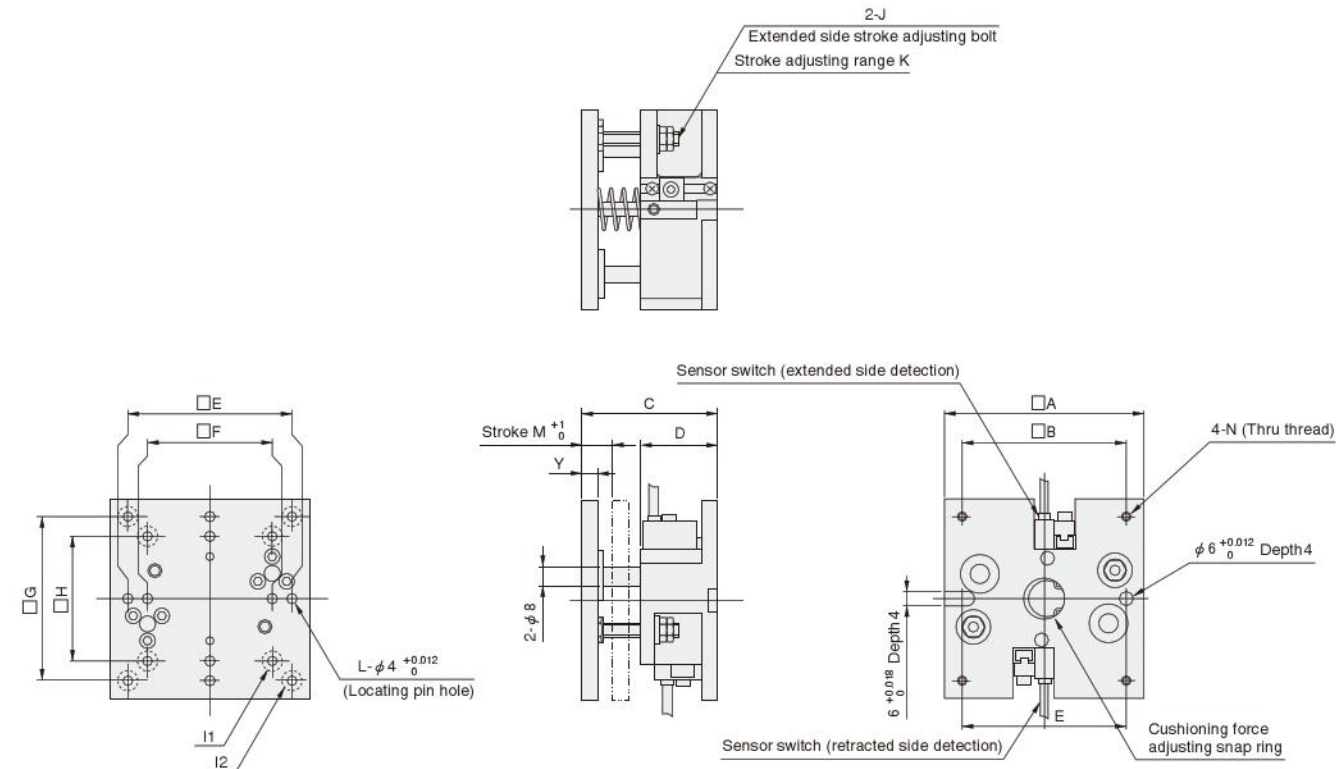


Remarks: 1. Tolerance of the contact surface parallelism between mounting surface and mounted surface = S : 0.04, M : 0.05, L : 0.06
2. Coaxiality tolerance with the rotating center, as restricted by the locating pin = S : φ 0.04, M : φ 0.05, L : φ 0.06

Model	Code	A	B	C	D	E	F	G	H	I1	I2	J	K ^{Note}	L	M	N	X		Y
																	Extended side	Retracted side	
SHM51S-SS	60	50	40	27	50±0.03	—	50	—	—	—	4-φ 4.5 4-φ 8 Counterbore Depth 4.4 (from the back side)	M4	5	4	5	M4	1	3	6
SHM51S-MS			45	27									10				3	4	
SHM51M-SS	80	65	45	28	65±0.03	50±0.03	65	50	—	4-φ 4.5 4-φ 8 Counterbore Depth 4.4	4-φ 5.5 4-φ 9.5 Counterbore Depth 5.4 (from the back side)	M5	8	8	8	M5	4	1	6
SHM51M-MS			55	31									15				7	5	
SHM51L-SS	100	85	50	31	85±0.05	65±0.03	85	65	—	—	—	M5	10	8	10	M5	5	2	7
SHM51L-MS			70	41									20				15	7	

Note: The sensor moving range, however, is Xmm.

Allowable Moment

Do not apply the moment ($M=F \times L$) exceeding the allowable values listed on p.1517.

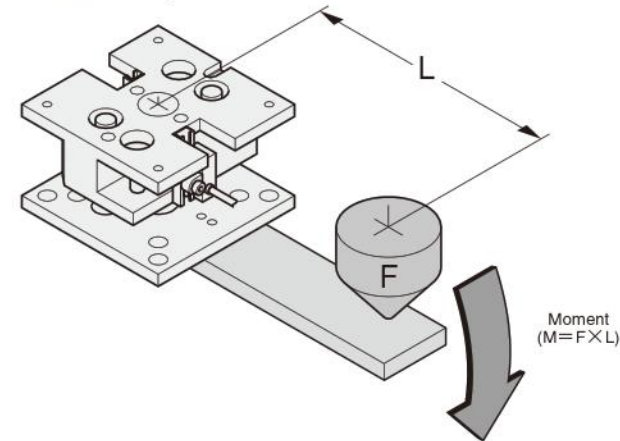

Application Examples

Positioning error correction during clamping of irregularly shaped workpiece

Protects the robot by correcting errors in the height.

Constant force insertion of plastic workpieces, etc. (snap insertion)

The cylinder inserts the workpiece up to a certain point, after which the spring force provides constant force insertion.

Detection of abnormalities of workpiece shape

Uses sensor to detect abnormalities in the height, and removes abnormal workpieces only.


COMPLIANCE MODULES



Positioning error correction module with excellent response and repeatability.
Comes mounted with a locking mechanism.

Operation principles

1. The frame and plate enclose rolling steel balls, which move freely under the light centripetal force of the restraining ring and spring.
2. Applying air pressure pushes the inner plate down, to lock it into the determined reference position with the locating steel ball.

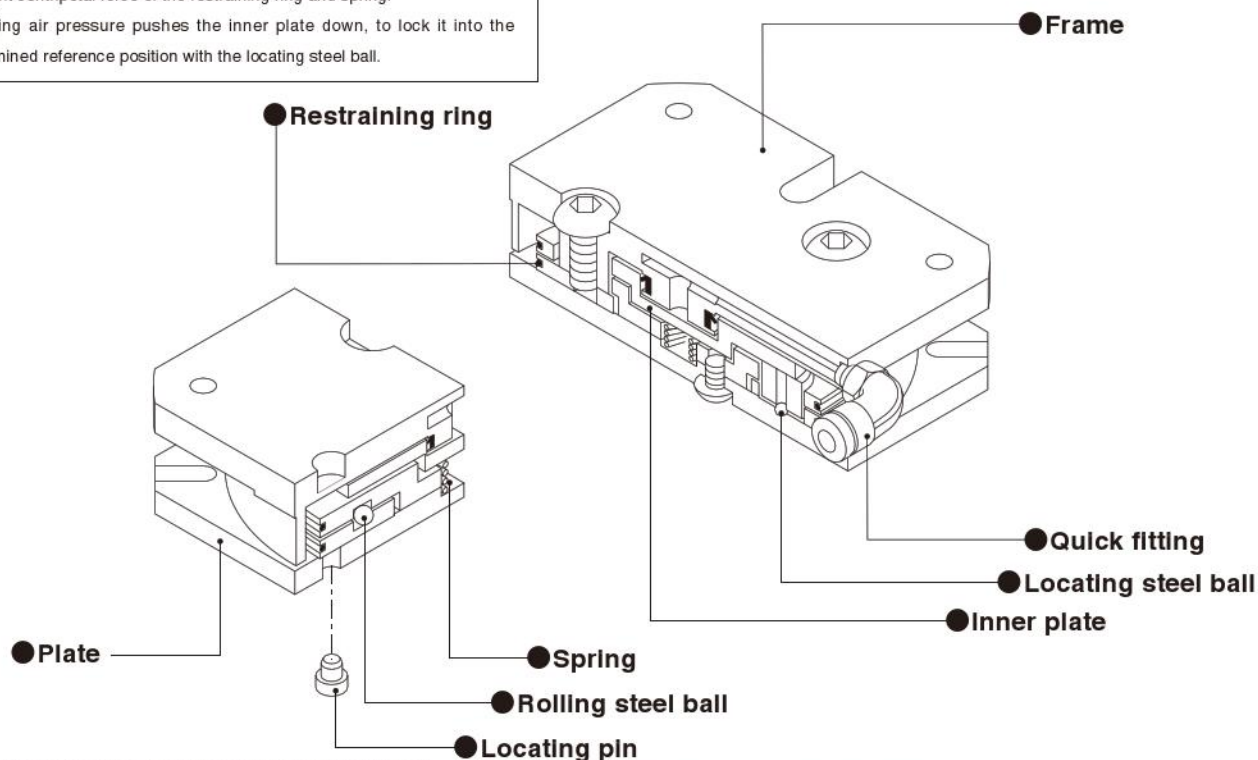

Note: Since loosening the connection screws will go out of the assembly precision, do not disassemble.

(Apply locking adhesive and insert it into the required hole.)

Specifications


Model		SHM 61S	SHM 61M	SHM 61L
Mounting specification	Mounting surface	S	M	L
	Mounted surface	S	M	L
Media		Air		
Operating pressure range		MPa [psi.] 0.2~0.6 [29~87]		
Proof pressure		MPa [psi.] 1 [145]		
Operating temperature range		°C [°F] 0~60 [32~140]		
Operation type and mechanism		Horizontal passive type, with locking mechanism ^{Note}		
Lubrication		Not required		
Load mass		kg [lb.] 1.5 [3.3]	3 [6.6]	4.5 [9.9]
Movement range	X·Y	mm [in.] ±1.0 [±0.039]		
	Z	mm [in.] -0.5 [-0.020]		
	θ	±2.5°		
	α	±0.6°		
Centripetal force		N [lbf.] 5 [1.1]		
Repeatability when locked		mm [in.] ±0.02 [±0.0008]		
Mass		g [oz.] 200 [7.1]	420 [14.8]	600 [21.2]

Note: Applying air pressure brings it into a locked state.

Order Codes


SHM	61	
Mounting specification S : Mounting pitch 50mm [1.969in.] M : Mounting pitch 65mm [2.559in.] L : Mounting pitch 85mm [3.346in.]		
Module Compliance module		
Alpha series systematic handling module		

※ Two locating pins are included.



Explanation of term


Centripetal force: The compliance module uses a restraining ring to keep its center with a force of 5N [1.1lbf.]. This force is called "centripetal force."

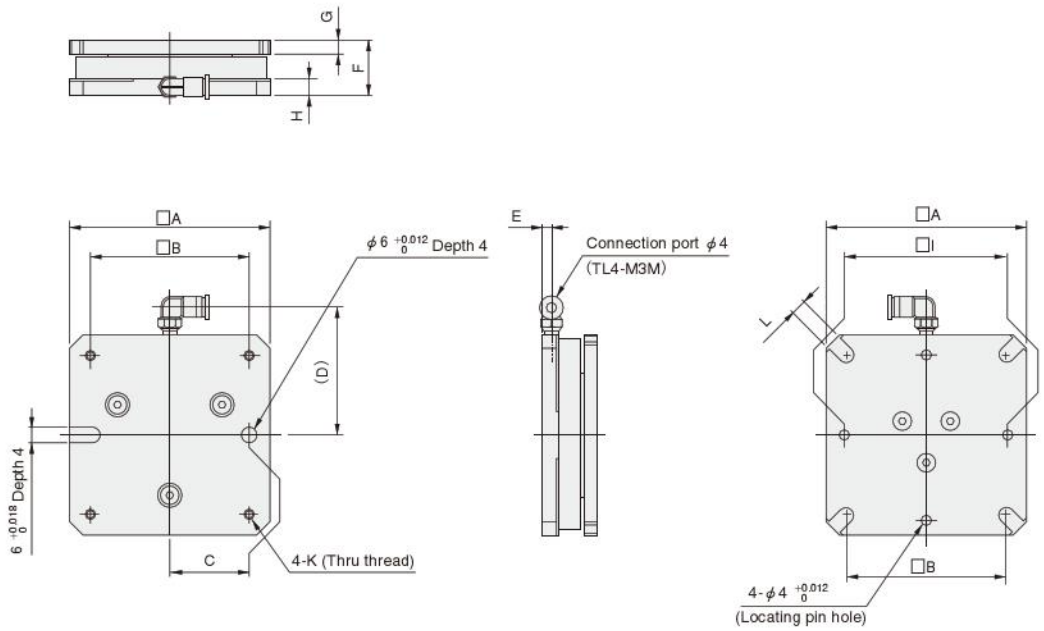

Remarks: 1. Tolerance of the contact surface parallelism between mounting surface and mounted surface = S : 0.04, M : 0.05, L : 0.06
2. Coaxiality tolerance with the hypothetical center, as restricted by the locating pin = S : ϕ 0.04, M : ϕ 0.05, L : ϕ 0.06

Code Model	A	B	C	D	E	F	G	H	I	K	L
SHM61S	60	50	25.0	42	3	20	4	5.5	50 ± 0.03	M4	4.5
SHM61M	80	65	32.5	52	3	23	5	6.0	65 ± 0.03	M4	4.5
SHM61L	100	85	42.5	62	3.5	28	7	7.0	85 ± 0.06	M5	5.5

Application Example

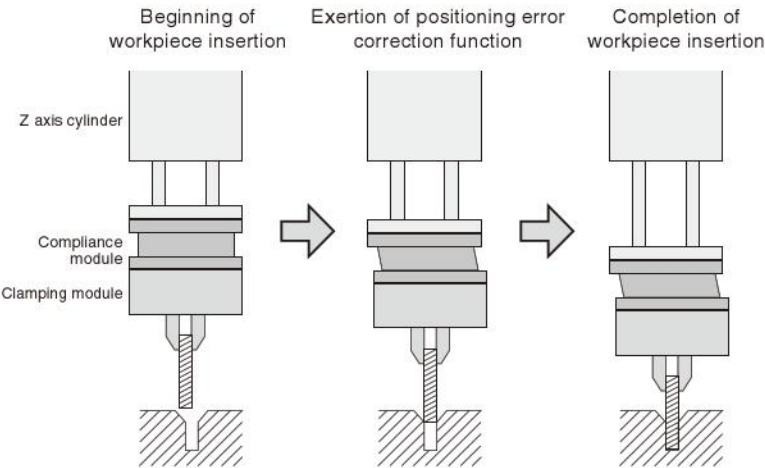

COMPLIANCE MODULES


NZ Specification



This compliance module eliminates positioning error correction in the Z and α directions, and reduces galling during workpieces insertion.

Operation principles

1. The frame and plate enclose rolling steel balls, which move freely under the light centripetal force of the restraining ring and spring.
2. Applying air pressure pushes the inner plate down, to lock it into the determined reference position with the locating steel ball.

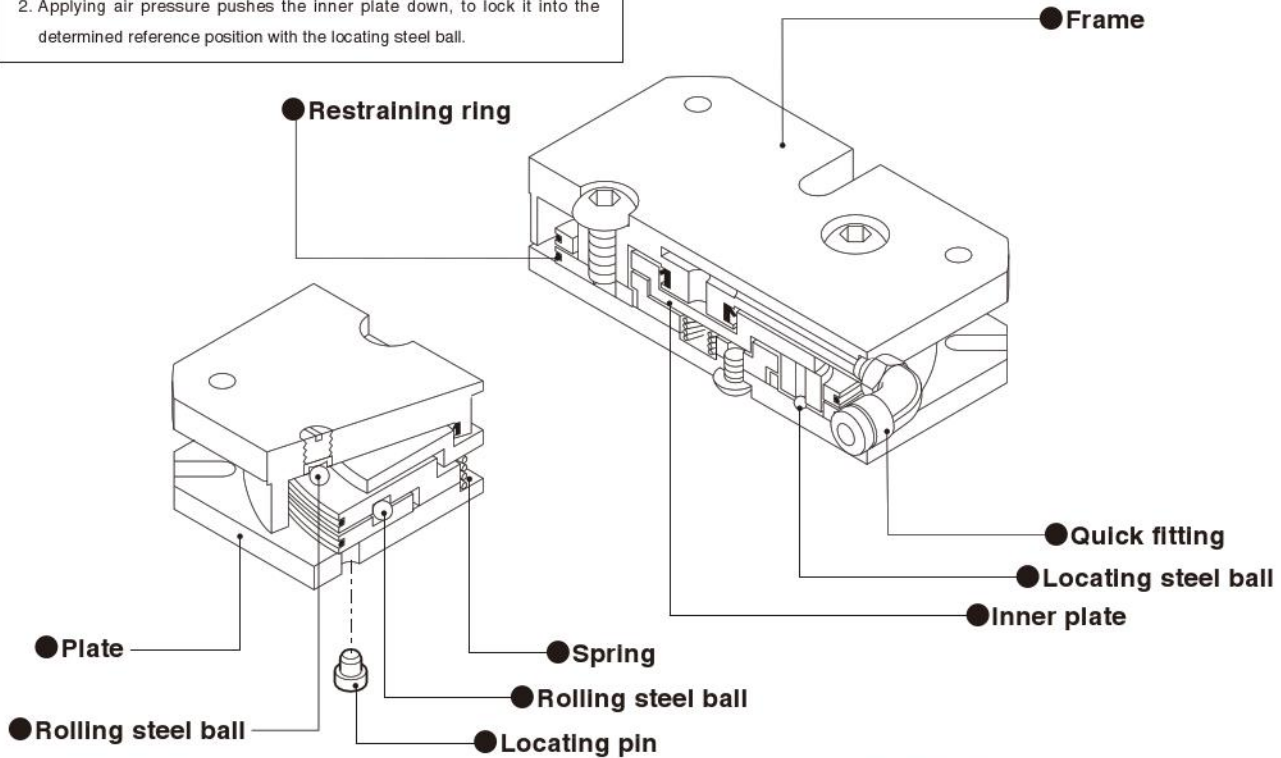

Note: Since loosening the connection screws will go out of the assembly precision, do not disassemble.

(Apply locking adhesive and insert it into the required hole.)

Specifications


Model		SHM 62S	SHM 62M	SHM 62L
Mounting specification	Mounting surface	S	M	L
	Mounted surface	S	M	L
Media		Air		
Operating pressure range		MPa [psi.] 0.2~0.6 [29~87]		
Proof pressure		MPa [psi.] 1 [145]		
Operating temperature range		°C [°F] 0~60 [32~140]		
Operation type and mechanism		Horizontal passive type, with locking mechanism ^{Note}		
Lubrication		Not required		
Load mass		kg [lb.] 1.5 [3.3]	3 [6.6]	4.5 [9.9]
Movement range	X·Y	mm [in.] ±1.0 [±0.039]		
	Z	mm [in.] —		
	θ	° ±2.5°		
	α	—		
Centripetal force		N [lbf.] 5 [1.1]		
Repeatability when locked		mm [in.] ±0.02 [±0.0008]		
Mass		g [oz.] 200 [7.1]	420 [14.8]	600 [21.2]

Note: Applying air pressure brings it into a locked state.


Order Codes

SHM	62	
Mounting specification S : Mounting pitch 50mm [1.969in.] M : Mounting pitch 65mm [2.559in.] L : Mounting pitch 85mm [3.346in.]		
Module Compliance module NZ specification		
Alpha series systematic handling module		

※ Two locating pins are included.



Moving directions of NZ specification
 Moves in the X, Y, and θ directions, as shown in the diagram to the left.

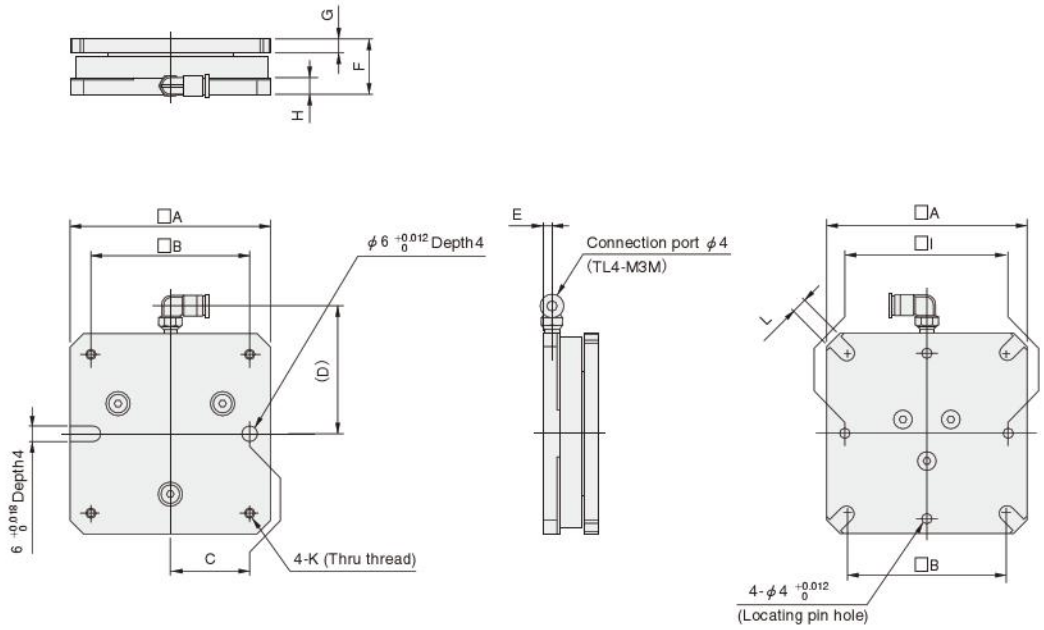


Remarks: 1. Tolerance of the contact surface parallelism between mounting surface and mounted surface = S : 0.04, M : 0.05, L : 0.06
2. Coaxiality tolerance with the hypothetical center, as restricted by the locating pin = S : ø 0.04, M : ø 0.05, L : ø 0.06

Code Model	A	B	C	D	E	F	G	H	I	K	L
SHM 62S	60	50	25.0	42	3	20	4	5.5	50±0.03	M4	4.5
SHM 62M	80	65	32.5	52	3	23	5	6.0	65±0.03	M4	4.5
SHM 62L	100	85	42.5	62	3.5	28	7	7.0	85±0.05	M5	5.5

PARALLEL CLAMPING MODULES



This module plays the role of fingers in the hand (gripper) unit. Because the cylinder operates asynchronously, it has superior positioning during clamping. It is particularly suitable for small workpieces.

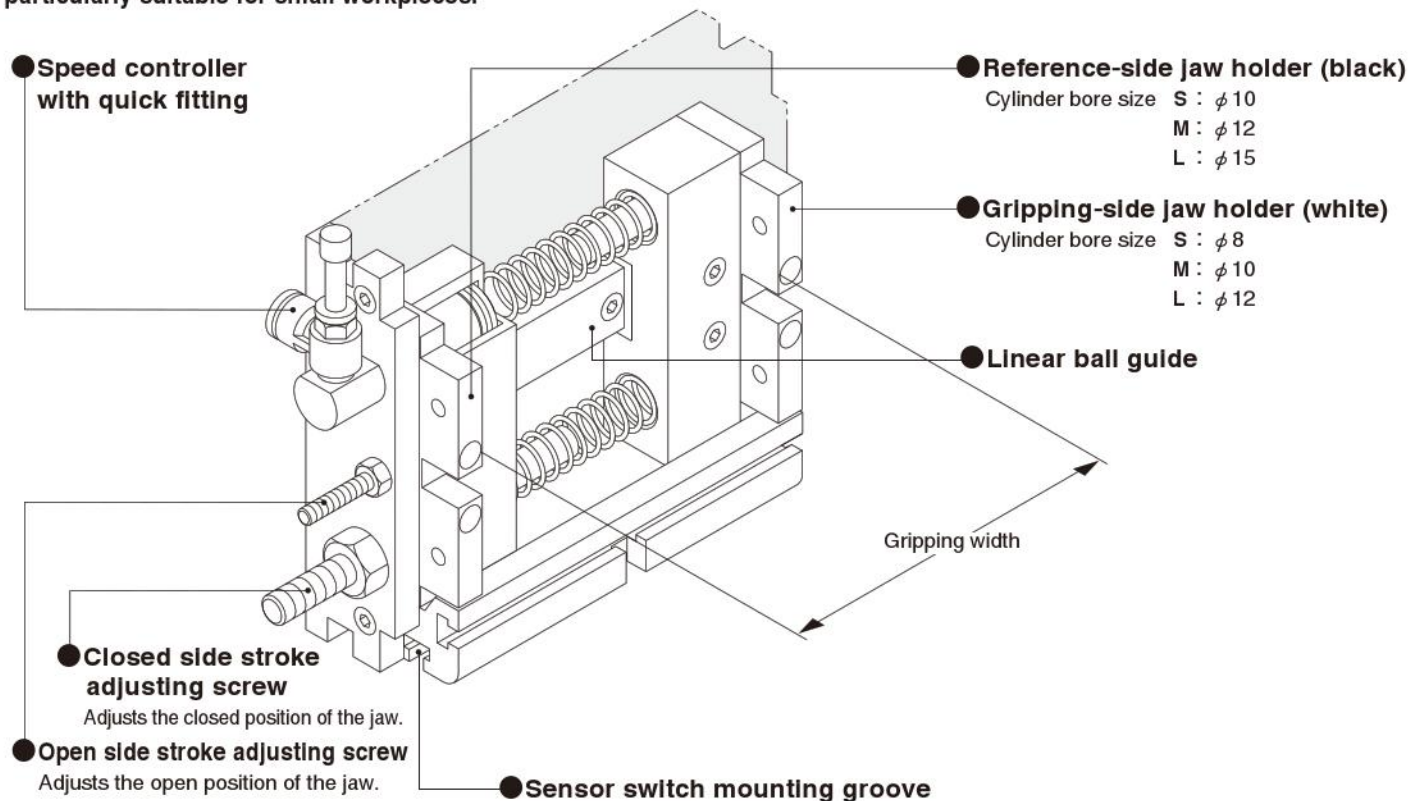


Note: Since loosening the connection screws will go out of the assembly precision, do not disassemble.

Specifications


Model		SHM71S	SHM71M	SHM71L
Item	Mounting surface	S	M	L
Cylinder bore size	mm [in.]	8 [0.315] (10 [0.394])	10 [0.394] (12 [0.472])	12 [0.472] (15 [0.591])
Stroke	mm [in.]	One side 8 [0.315]	One side 12 [0.472]	One side 15 [0.591]
Media		Air		
Operating pressure range	MPa [psi.]	0.2~0.6 [29~87]		
Proof pressure	MPa [psi.]	1 [145]		
Operating temperature range	°C [°F]	0~60 [32~140]		
Operation type and mechanism		Normally open single acting type, asynchronous type, linear ball guide, with stroke adjusting mechanism		
Lubrication		Not required		
Gripping force Note N [lbf.]	When open (Spring force)	2.5~6.9 [0.56~1.55]	3.9~12.7 [0.88~2.85]	5.1~12.9 [1.15~2.90]
	When closed	21.6—Spring force [4.9—Spring force]	33.3—Spring force [7.5—Spring force]	48.1—Spring force [10.8—Spring force]
Allowable moment N·cm [in·lbf]	Pitching	100 [8.9]	210 [18.6]	460 [40.7]
	Yawing	120 [10.6]	240 [21.2]	540 [47.8]
	Rolling	160 [14.2]	290 [25.7]	980 [86.7]
Repeatability	mm [in.]	± 0.01 [± 0.0004]		
Maximum operating frequency	cycle/min	40		
Sensor switches		Operation detection X2		
Gripping width	mm [in.]	26~42 [1.02~1.65]	33~57 [1.30~2.24]	43~73 [1.69~2.87]
Mass	g [oz.]	240 [8.5]	450 [15.9]	880 [31.0]

Note: Values at 0.5MPa [73psi.] air pressure.


Order Codes

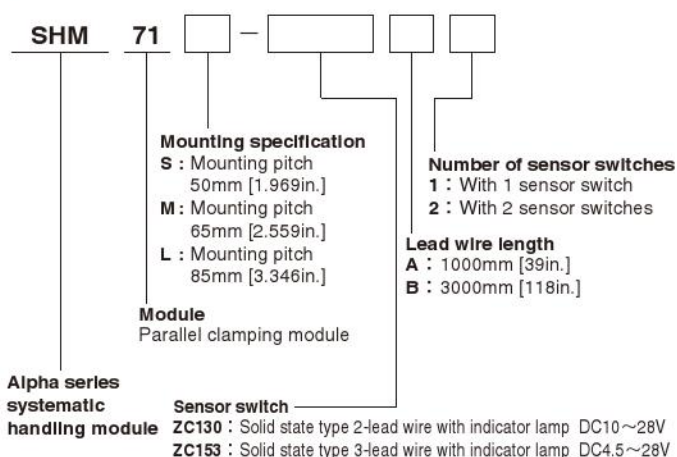

Order codes for sensor switches only

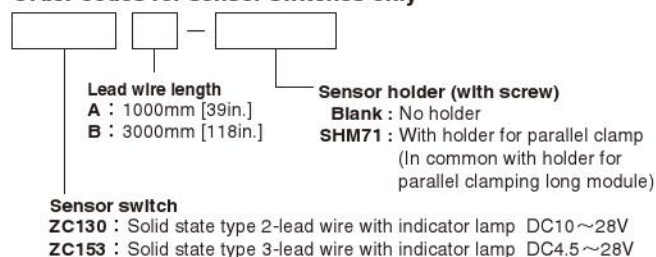


● For details of sensor switches, see p.1544.

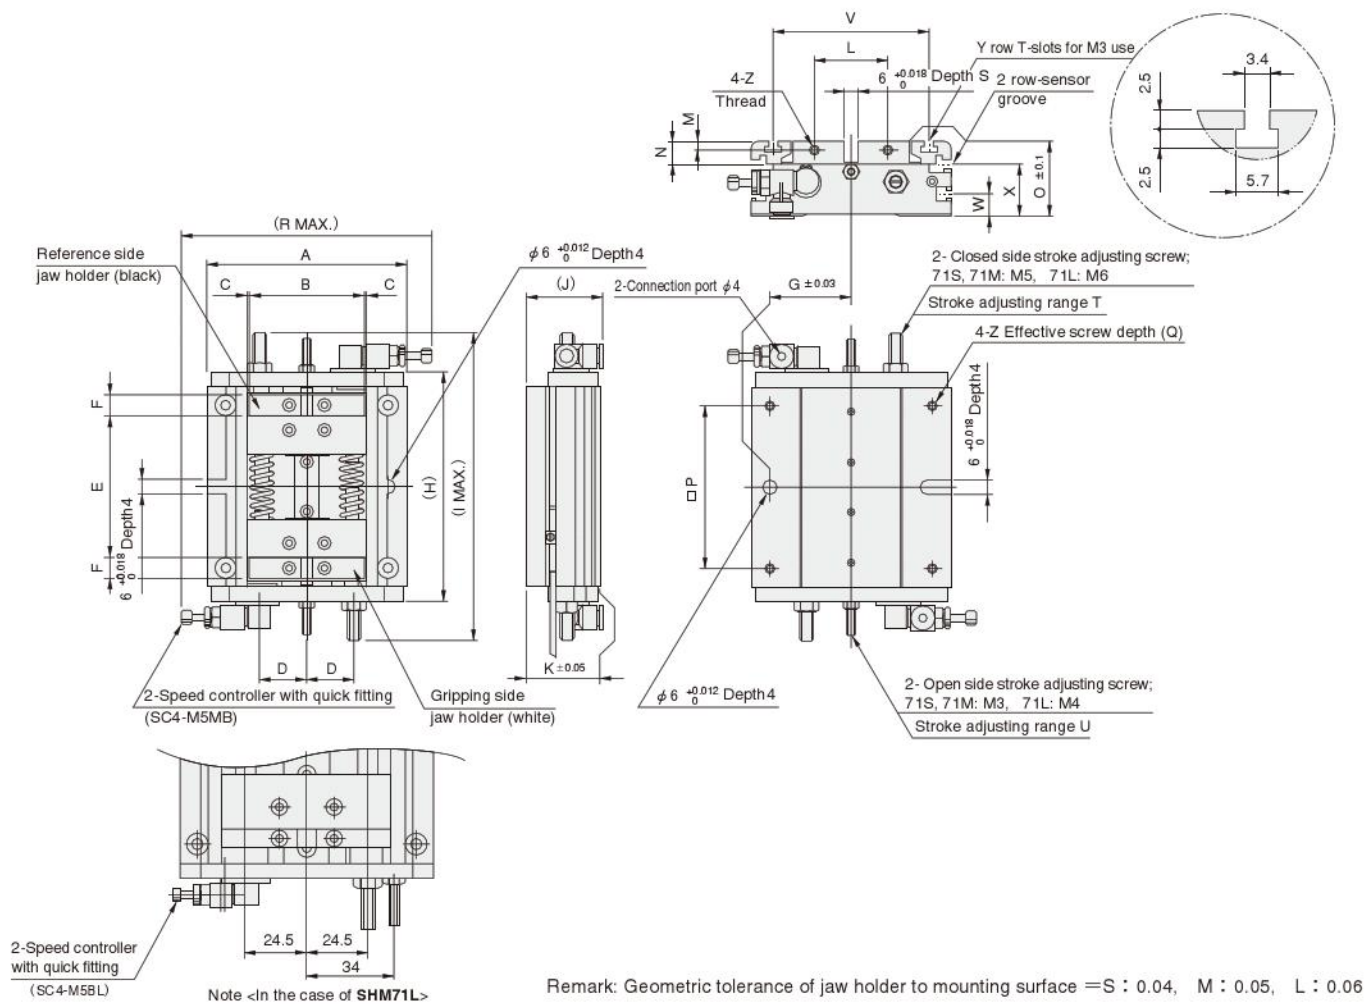

Code	A				E		F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
	Model	Maximum when open	Minimum when closed																								
SHM71S	60	32	0.5	14.5	42	26	6	25.0	72	100	30	25	20	4	8	25	50	4	92	7	8	8	45	—	16	2	M4
SHM71M	80	46	1.0	18.5	57	33	8	32.5	92	122	32	30	30	4	9	30	65	7	100	8	10	10	60	8	21	4	
SHM71L	100	64	1.0	Note	73	43	8	42.5	112	155	34	35	40	5	10	35	85	8	110	8.5	15	15	78	10	23	4	M5





Allowable Moment

Do not apply any moment exceeding the allowable values listed on p.1523.

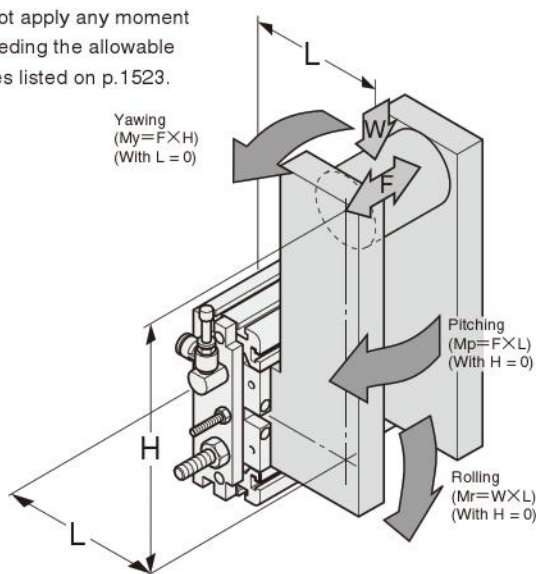


Comparative Examples

As compared with more commonly used synchronous types, this module employs an asynchronous method (to obtain independent movement in each jaw). In addition, extended and retracted side stroke adjustment allows fine adjustment for workpieces. Since the cylinder bore size of the jaw on one side has been larger and works as a reference side for gripping, and along with the opposite side for slave jaw, it is optimum for gripping workpieces having its reference plane on the side.

Synchronous type	
	
Since the workpiece itself serves as a stopper, there is a risk of damage to soft workpieces.	The synchronous type is more suitable for gripping workpieces with reference centers.
Asynchronous type	
	
The asynchronous type is more suitable for gripping workpieces with side reference plane or workpieces of irregular shape.	The stroke adjusting screw prevents more than the set force from being applied, to ease such concerns.

PARALLEL CLAMPING LONG MODULES

This module plays the role of fingers in the hand (gripper) unit. Because the cylinder is asynchronous, it has superior positioning during clamping. And changing the applied air pressure can make either side serve as the reference jaw. It is particularly suitable for large-sized workpieces.

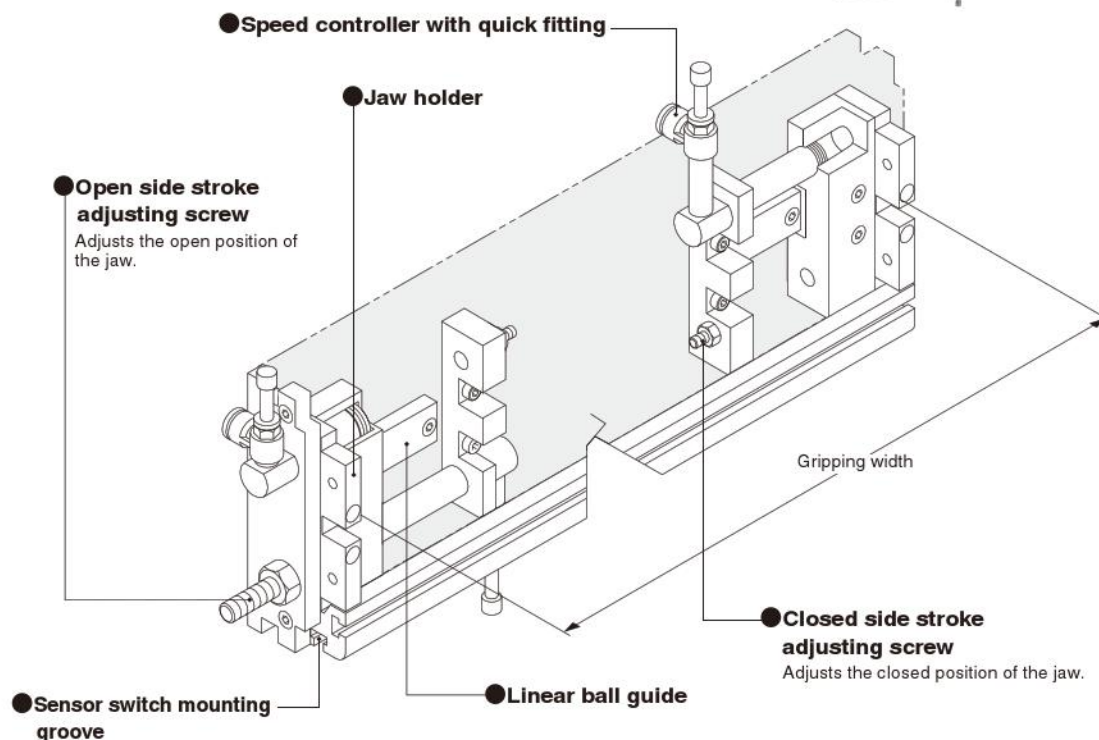

Note : Since loosening the connection screws will go out of the assembly precision, do not disassemble.

Specifications

Model		SHM72S			SHM72M			SHM72L		
		SL	ML	LL	SL	ML	LL	SL	ML	LL
Mounting specification	Mounting surface	S			M			L		
Bore size	mm [in.]	8 [0.315]			12 [0.472]			15 [0.591]		
Stroke	mm [in.]	One side 20 [0.787]			One side 26 [1.024]			One side 30 [1.181]		
Media		Air								
Operating pressure range MPa [psi.]		0.2~0.6 [29~87]								
Proof pressure MPa [psi.]		1 [145]								
Operating temperature range °C [°F]		0~60 [32~140]								
Operation type and mechanism		Double acting type, asynchronous type, linear ball guide, with stroke adjusting mechanism								
Lubrication		Not required								
Gripping force ^{Note} N [lbf.]	When open	21.6 [4.9]			48.1 [10.8]			76.4 [17.2]		
	When closed	21.6 [4.9]			48.1 [10.8]			76.4 [17.2]		
Allowable moment N·cm [in·lbf]	Pitching	100 [8.9]			210 [18.6]			460 [40.7]		
	Yawing	120 [10.6]			240 [21.2]			540 [47.8]		
	Rolling	160 [14.2]			290 [25.7]			980 [86.7]		
Repeatability	mm [in.]	±0.01 [±0.0004]								
Maximum operating frequency cycle/min		40								
Sensor switches		Operation detection×4								
Gripping width	mm	100~140	200~240	300~340	124~176	224~276	324~376	258~318	358~418	458~518
Mass	g [oz.]	490 [17.3]	610 [21.5]	730 [25.7]	850 [30.0]	960 [33.9]	1100 [38.8]	1700 [60.0]	1980 [69.8]	2200 [77.6]

Note: Values at 0.5MPa [73psi.] air pressure.

Order Codes

SHM

72

Module

Parallel clamping long module

Alpha series systematic handling module

Gripping width mm

Mounting spec.	S	M	L
SL	140	176	318
ML	240	276	418
LL	340	376	518

Mounting specification

S : Mounting pitch 50mm [1.969in.]

M : Mounting pitch 65mm [2.559in.]

L : Mounting pitch 85mm [3.346in.]

Sensor switch

ZC130 : Solid state type 2-lead wire with indicator lamp DC10~28V

ZC153 : Solid state type 3-lead wire with indicator lamp DC4.5~28V

Lead wire length

A : 1000mm [39in.]

B : 3000mm [118in.]

Number of sensor switches

1 : With 1 sensor switch

2 : With 2 sensor switches

3 : With 3 sensor switches

4 : With 4 sensor switches

Order codes for sensor switches only


Lead wire length
A : 1000mm [39in.]
B : 3000mm [118in.]

Sensor switch
ZC130 : Solid state type 2-lead wire with indicator lamp DC10~28V
ZC153 : Solid state type 3-lead wire with indicator lamp DC4.5~28V

Sensor holder (with screw)
Blank : No holder
SHM71 : With holder for parallel clamp
(In common with holder for parallel clamping module)

● For details of sensor switches, see p.1544.


Dimensions of SHM72S, M, L (mm)

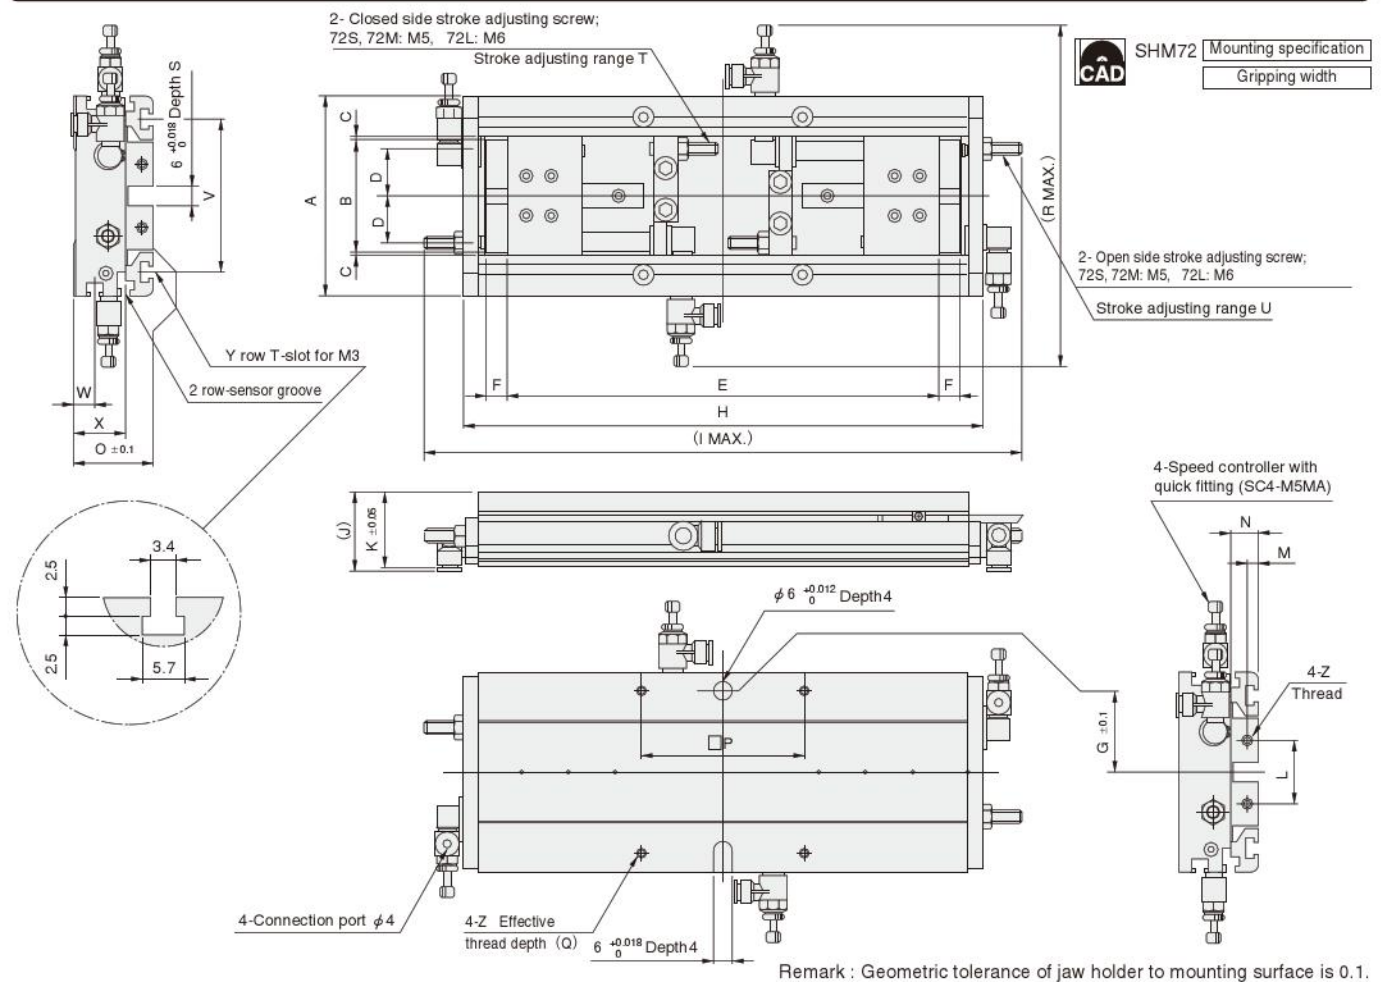

Code Model	A	B	C	D	E		F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
					Maximum when open	Minimum when closed																					
SHM72S-SL	60	32	0.5	14.5	140	100	6	25.0	172	197	30	25	20	4	8	25	50	4	122	7	7	9	45	—	16	2	M4
SHM72S-ML					240	200															12						
SHM72S-LL					340	300															10						
SHM72M-SL	80	46	1.0	18.0	176	124	8	32.5	212	247	32	30	30	4	9	30	65	7	135	8	10	14	60	8	21	4	M4
SHM72M-ML					276	224															15						
SHM72M-LL					376	324															10						
SHM72L-SL	100	64	1.0	24.5	318	258	8	42.5	352	400	34	35	40	5	10	35	85	8	155	8.5	15	15	78	10	23	4	M5
SHM72L-ML					418	358															15						
SHM72L-LL					518	458															15						

Allowable Moment

Do not apply any moment exceeding the allowable values listed on p.1525.

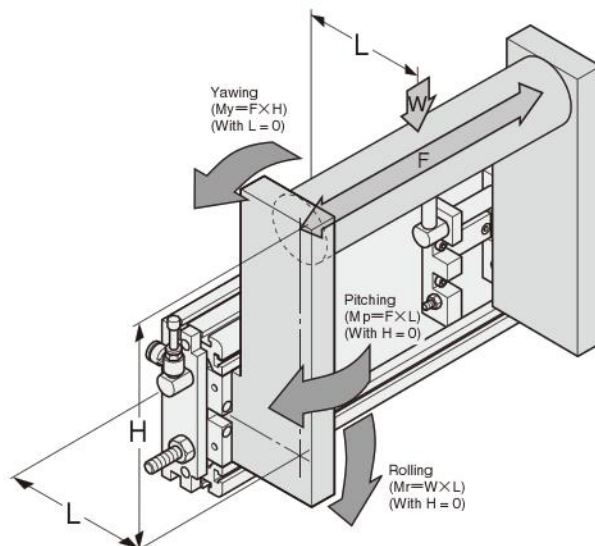

SHOCK ABSORBERS

Specifications

● KSHA Series for Turning Module


Basic model	KSHA6×5-D	KSHA6×5-DE	KSHA6×8-F
Item			
Maximum absorption J [ft·lbf]	1.0 [0.74]	1.5 [1.11]	2.9 [2.14]
Maximum impact speed m/s [ft./sec.]	1.0 [3.28]		
Maximum operating frequency cycle/min	60		30
Absorbing stroke mm [in.]	5 [0.197]		8 [0.315]
Operating temperature range °C [°F]	0~60 [32~140]		
Mass g [oz.]	10 [0.35]		20 [0.71]

● KSHAH Series for Reversing Module

Basic model	KSHAH6×3	KSHAH6×4	KSHAH6×5
Item			
Maximum absorption J [ft·lbf]	0.3 [0.22]	0.9 [0.66]	1.4 [1.03]
Maximum impact speed m/s [ft./sec.]	0.1 [0.33]		
Maximum operating frequency cycle/min	60		
Absorbing stroke mm [in.]	3 [0.118]	4 [0.157]	5 [0.197]
Operating temperature range °C [°F]	0~60 [32~140]		
Mass g [oz.]	14 [0.49]	18 [0.63]	22 [0.78]


Dimensions (mm)

● KSHA

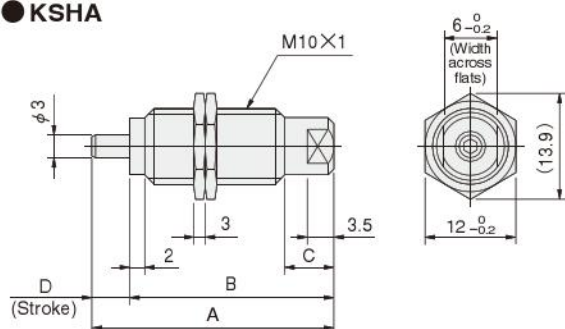

Model	A	B	C	D
KSHA6×5-D	30.5	25.5	7	5
KSHA6×5-DE				
KSHA6×8-F	48	40	10	8


● KSHAH

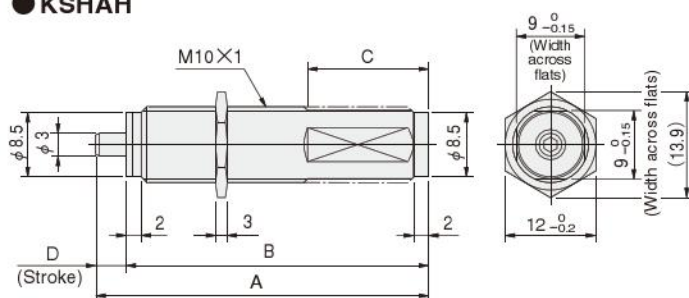

Model	A	B	C	D
KSHAH6×3	33	30	16	3
KSHAH6×4	44	40		4
KSHAH6×5	53	48	22	5

Either single use or various combinations are possible.

● **Application Example as Robotic Fingers**

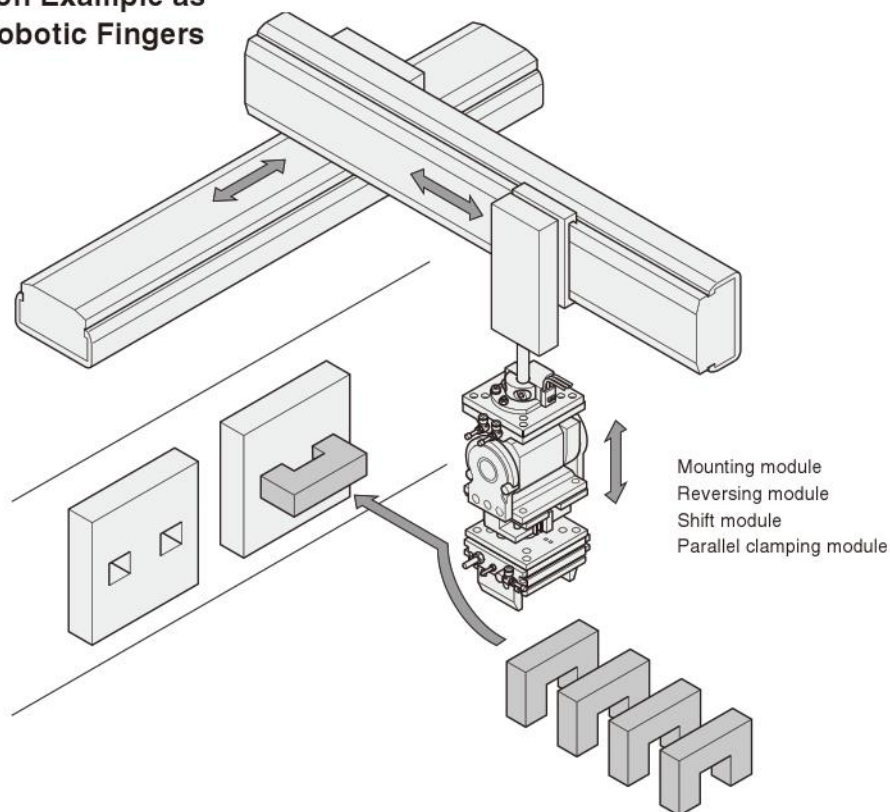

● **Application Example for Conveyor Line**

